

SPECIFICATION SHEET

SPECIFICATION SHEET NO.	R0306- BDD4SW0000000S	
DATE	March. 06, 2024	
REVISION	A0	Updated With Most Recent Data - Official First Release
DESCRIPTION AND MAIN PARAMETRICS	Automotive Side Emitting LED SMD 4040 0.2w White Color L4.00*W4.00*H3.55mm, Colorless & Clear Lens Transparency, 2.4mm Dia. Viewing Angle 120°, Lens Round with Flat Top Forward Voltage (VF) 2.8~3.6V Color Bin Rank (k) 4310~10010k Luminous Flux Rank (IV) 14~30 lm Operating Temp. Range -40°C ~+105°C Package in Tape/Reel, REACH/RoHS/RoHS III Compliant	
CUSTOMER		
CUSTOMER PART NO.		
CROSS REF. PART NO.		
ORIGINAL MFG/PART NO.	Oriental Technology/ BDD-4SW-000-00-00	
PART CODE	BDD4SW0000000S	

VENDOR APPROVE

Issued/Checked/Approved



DATE: March. 06, 2024

CUSTOMER APPROVE

DATE:

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

MAIN FEATURE

- White Color Side Emitting 4040 Package
- Luminous Flux@50mA: 14~30 lm
- Emitting Material: InGaAlP Chip
- View Angle at 50% Iv of 120°
- Corrosion Robustness: Excellent Corrosion Robustness
- Suitable for SMT process
- Cross Competitors Parts
- REACH/RoHS/RoHS III Compliant
- Moisture Sensitivity Level (MSL) 2A (4 weeks)



APPLICATION

- Auto Signaling
- Auto Lighting Interior and Exterior
- Signal and Symbol Luminary

ELECTRICAL CHARACTERISTICS

- See Page 6 ~Page 7

HOW TO ORDER

- Please indicate part code OR custom parameters code and send us your RFQ by E-mail.

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

PART CODE GUIDE

RFQ
[Request For Quotation](#)

CODE	NAME	KEY SPECIFICATION OPTION
BDD4S	Product Series Code	Automotive Side Emitting LED with lens 120° SMD 4040 0.2w Lens Round with Flat Top, Dimension L4.00*W4.00*H3.55mm
W	Color Code	W: White Color
000	Forward Voltage Rank (VF)	Custom letter A~Z, a-z or digits (0-9) 000: 2.8V ~3.6V; V07: 2.8V ~3.0V; V08: 3.0V ~3.2V V09: 3.2V ~3.4V; V10: 3.4V ~3.6V
00	Color Bin Rank (DWL)	Custom letter A~Z, a-z or digits (0-9) 00: 4310k~ 10010k; Custom Color Bin Code at Page 8
00	Luminous Flux Rank (Flux)	Custom letter A~Z, a-z or digits (0-9) 00: 14 lm ~30 lm; LA: 14 lm~18 lm; LB: 18 lm ~22 lm; LC: 22 lm ~26 lm; LD: 26 lm ~30 lm
S	Internal Control Code	Custom letter A~Z, a-z or digits (0-9)

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

DIMENSION – (Unit: mm)




Image For Reference



Size Code 4040

Lens Round with Flat Top

L4.00*W4.00*H3.55mm,

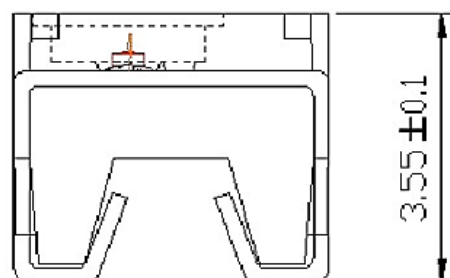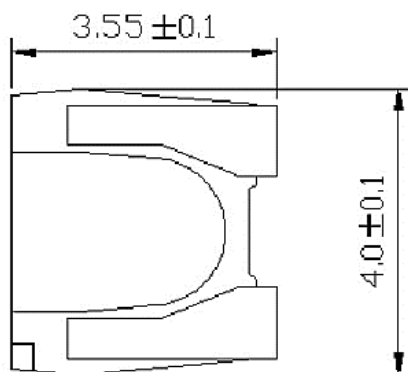
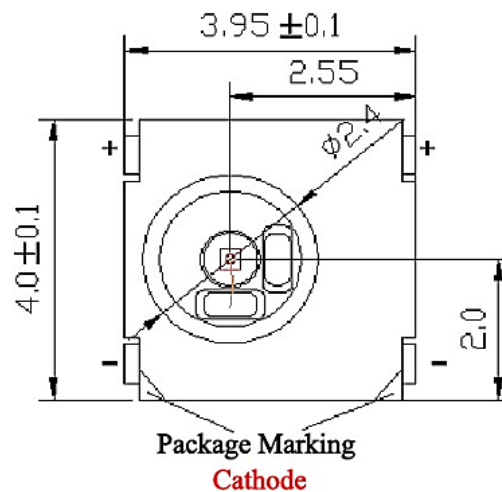


AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

Circuit



Recommend Pad Layout (Unit: mm, Tol: +/-0.1mm)

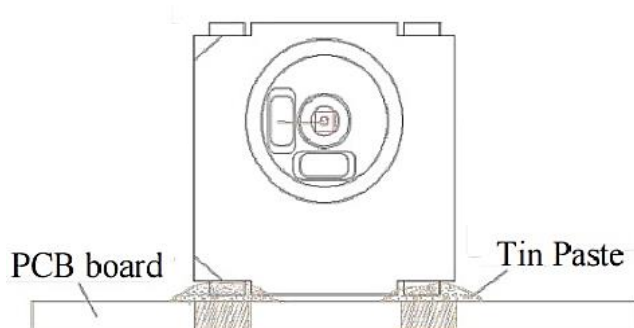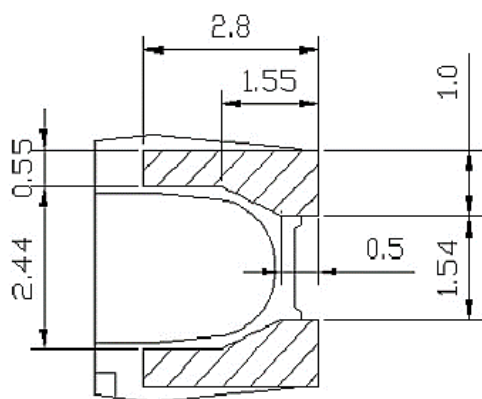

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

MAXIMUM RATINGS $T_s=25^{\circ}\text{C}$, RH60%

PARAMETERS	SYMBOL	VALUES	UNIT
Operating Temperature	Top	-40~+105	$^{\circ}\text{C}$
Storage Temperature	Tstg	-40~+105	$^{\circ}\text{C}$
Junction Temperature	Tj	125	$^{\circ}\text{C}$
Forward Current ($T_s=25^{\circ}\text{C}$)	IF	70	mA
Surge Current ($t \leq 10\mu\text{s}$; $D=0.005$; $T_s=25^{\circ}\text{C}$)	IFS	150	mA
Reverse Voltage ($T_s=25^{\circ}\text{C}$)	VR	5	V
Electrostatic Discharge (acc.to ANSI/ESDA/JEDEC JS-001-2017)	VESD	≥ 2	kV

OPTICAL & ELECTRICAL CHARACTERISTICS $I_F=50\text{mA}$, $T_s=25^{\circ}\text{C}$, RH60%

PARAMETERS	SYMBOL	VALUES			UNIT
		MIN.	TYP.	MAX.	
Color Temperature	CCT	4310	-	10010	k
Forward Current	IF	5	-	70	mA
Luminous Flux Rank @50mA	IV	14	-	30	lm
Color Rendering Index	CRI	70	-	-	Ra
Viewing Angle	2 θ 1/2	-	120	-	Deg
Forward Voltage	VF	2.8	-	3.6	V
Reverse Current	IR (VR=5V)	-	-	10	μA
Thermal Resistance junction/solder point	Rth(j-sp)real	-	100	115	K/W
Electrical Thermal Resistance junction/solder point with efficiency $\eta=34\%$	Rth(j-sp)elec	-	66	77	K/W

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

ELECTRICAL CHARACTERISTICS IF=50mA, Ts=25°C, RH60%


Part Code	Forward Voltage - VF (V)	Color Bin Rank (K)	Luminous Flux Rank (Flux) (lm)
BDD4SW0000000S	2.8~3.6	4310~10010	14~30

BIN CODE LIST

PARAMETERS	SYMBOL	VALUES	TOLERANCE	UNIT
Forward Voltage Rank (VF) @IF=50mA, Ts=25°C, RH60%	000	2.8~3.6	±0.05	V
	V07	2.8~3.0		
	V08	3.0~3.2		
	V09	3.2~3.4		
	V10	3.4~3.6		
Color Bin Rank (CCT) @IF=50mA, Ts=25°C, RH60%	00	4310~10010	±0.005	K
	Bin Code	See Page 8		
Luminous Flux Rank (Flux) @IF=50mA, Ts=25°C, RH60%	00	14~30	±5.0%	lm
	LA	14~18		
	LB	18~22		
	LC	22~26		
	LD	26~30		

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

COLOR BIN - White Binning Structure Graphical Representation , Tol. on each color bin (x , y) is ± 0.005

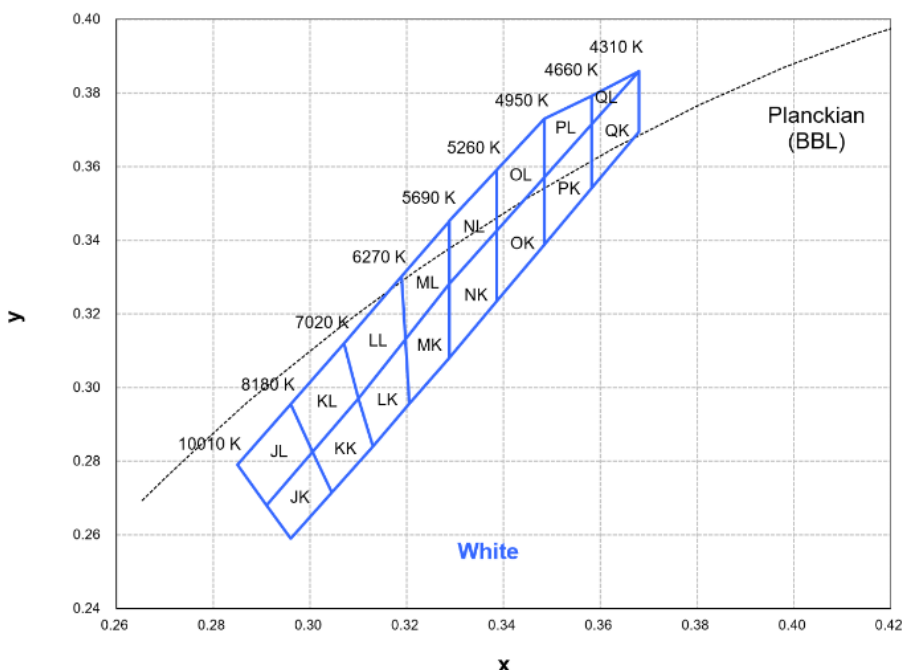

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
QL	0.3582	0.3715	4485	ML	0.3189	0.3302	5980
	0.3582	0.3792			0.3197	0.3131	
	0.3680	0.3859			0.3288	0.3282	
	0.3582	0.3715			0.3288	0.3452	
QK	0.3582	0.3715	4485	MK	0.3197	0.3131	5980
	0.3582	0.3542			0.3205	0.2956	
	0.3680	0.3695			0.3288	0.3081	
	0.3680	0.3859			0.3288	0.3282	
PL	0.3484	0.3730	4805	LL	0.3100	0.2970	6645
	0.3484	0.3571			0.3070	0.3120	
	0.3582	0.3715			0.3189	0.3302	
	0.3582	0.3792			0.3197	0.3131	
PK	0.3484	0.3571	4805	LK	0.3130	0.2840	6645
	0.3484	0.3388			0.3100	0.2970	
	0.3582	0.3542			0.3197	0.3131	
	0.3582	0.3715			0.3205	0.2956	
OL	0.3386	0.3591	5105	KL	0.3005	0.2825	7600
	0.3386	0.3426			0.2960	0.2955	
	0.3484	0.3571			0.3070	0.3120	
	0.3484	0.3730			0.3100	0.2970	
OK	0.3386	0.3426	5105	KK	0.3045	0.2715	7600
	0.3386	0.3235			0.3005	0.2825	
	0.3484	0.3388			0.3100	0.2970	
	0.3484	0.3571			0.3130	0.2840	
NL	0.3288	0.3453	5475	JL	0.2910	0.2680	9095
	0.3288	0.3282			0.2850	0.2790	
	0.3386	0.3426			0.2960	0.2955	
	0.3386	0.3591			0.3005	0.2825	
NK	0.3288	0.3282	5475	JK	0.2960	0.2590	9095
	0.3288	0.3081			0.2910	0.2680	
	0.3386	0.3235			0.3005	0.2825	
	0.3386	0.3426			0.3045	0.2715	

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=50mA, Ts=25°C, RH60%

Figure 1. Relative Spectral Emission, $I_{rel}=f(\lambda)$


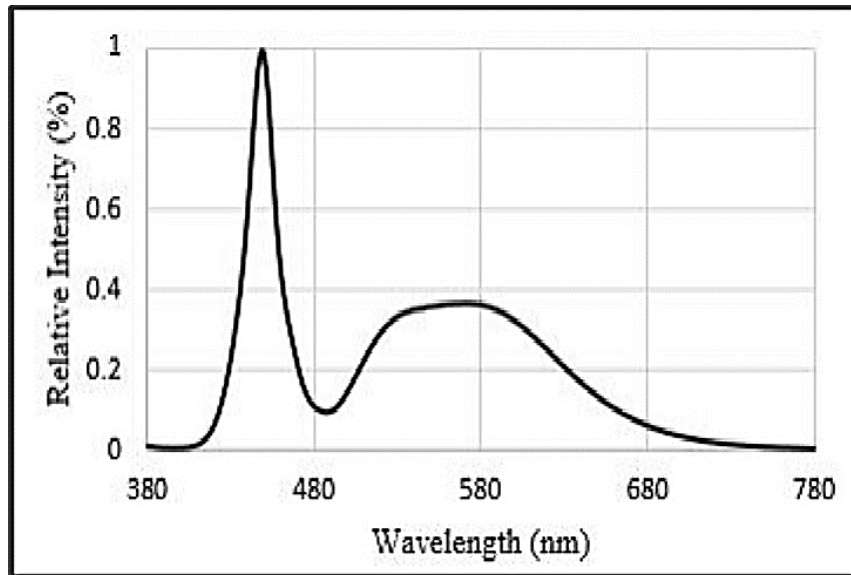


Figure 2. Forward Current Vs. Relative Intensity, $\Phi_V/\Phi_V(50mA)=f(I_F)$

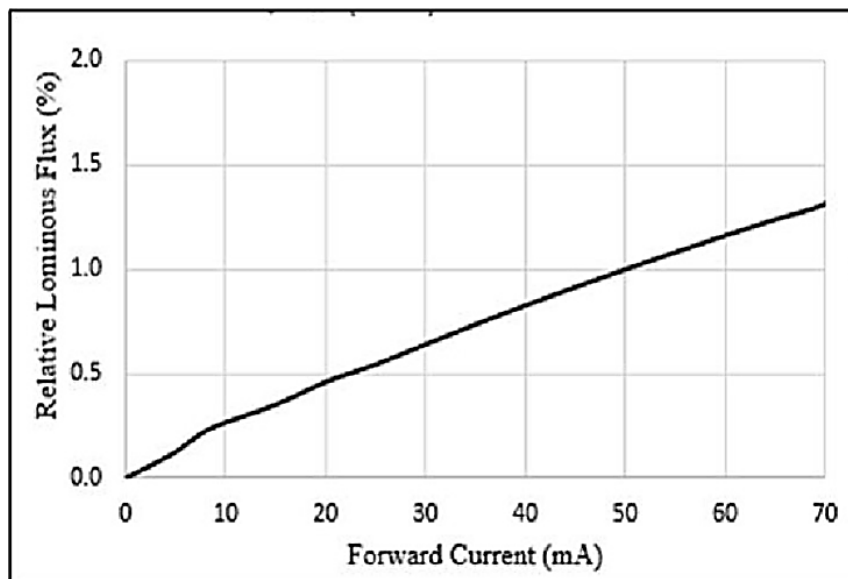

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=50mA, Ts=25°C, RH60%

Figure 3. Forward Voltage Vs. Forward Current, $I_F = f(V_F)$


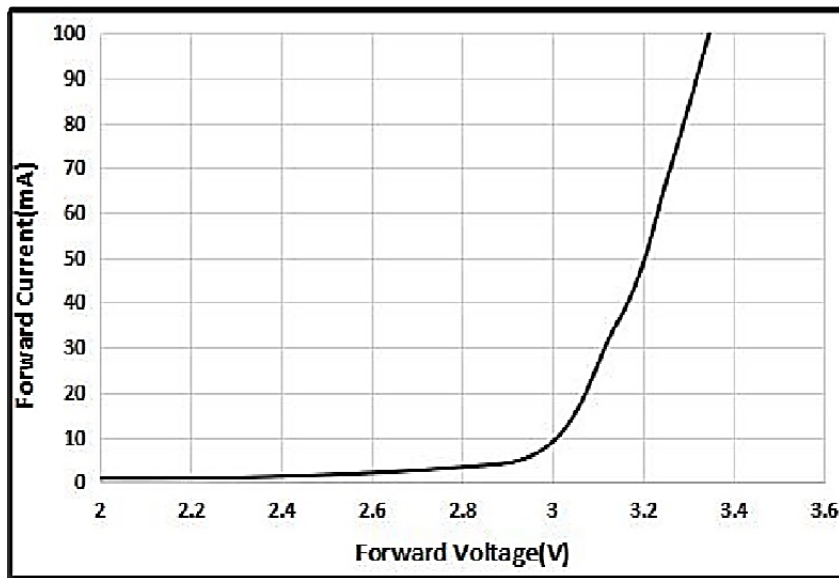


Figure 4. . TS Vs. Relative Intensity

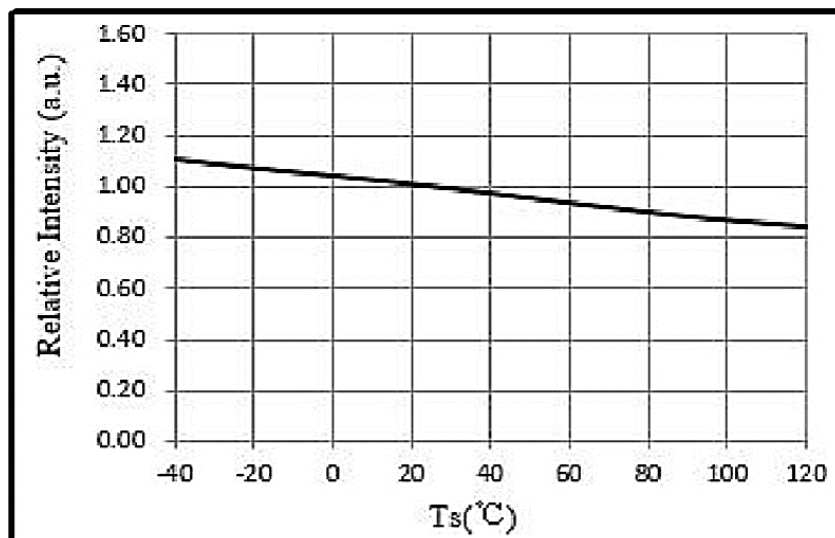

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=50mA, Ts=25°C, RH60%

Figure 5. Ts Vs. ΔV_F


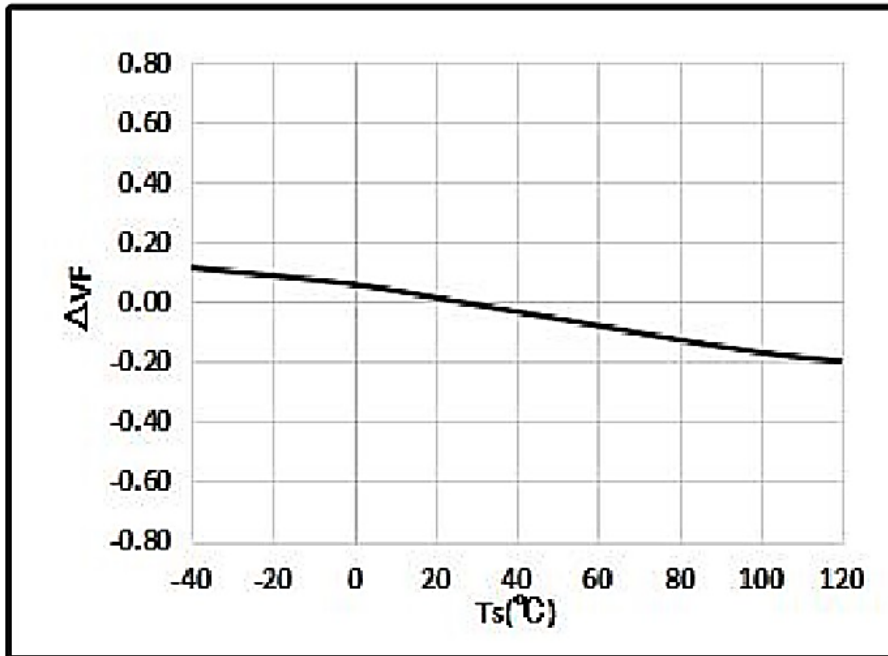


Figure 6. . Ts Vs. Chromaticity Coordinate

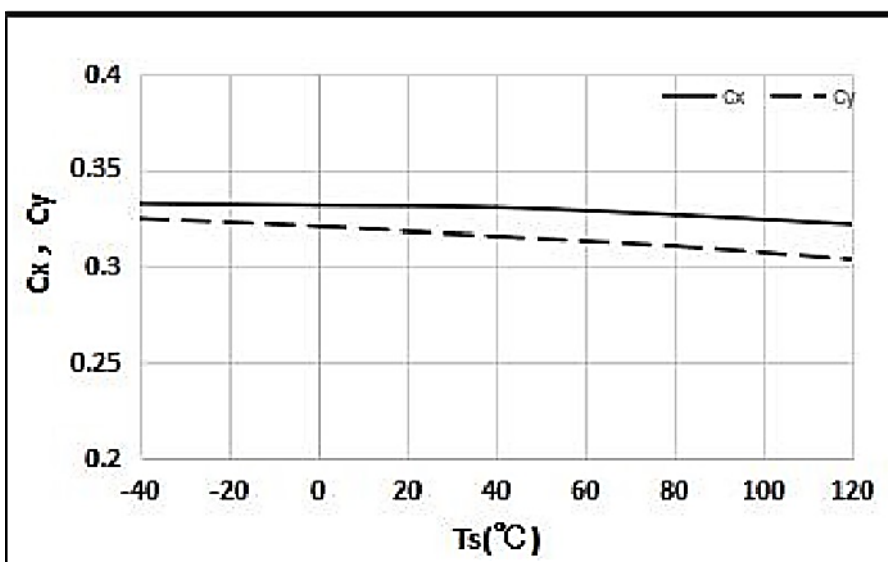

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=50mA, Ts=25°C, RH60%

Figure 7 Ts Vs. Max. Permissible IF, $I_F = f(T_s)$


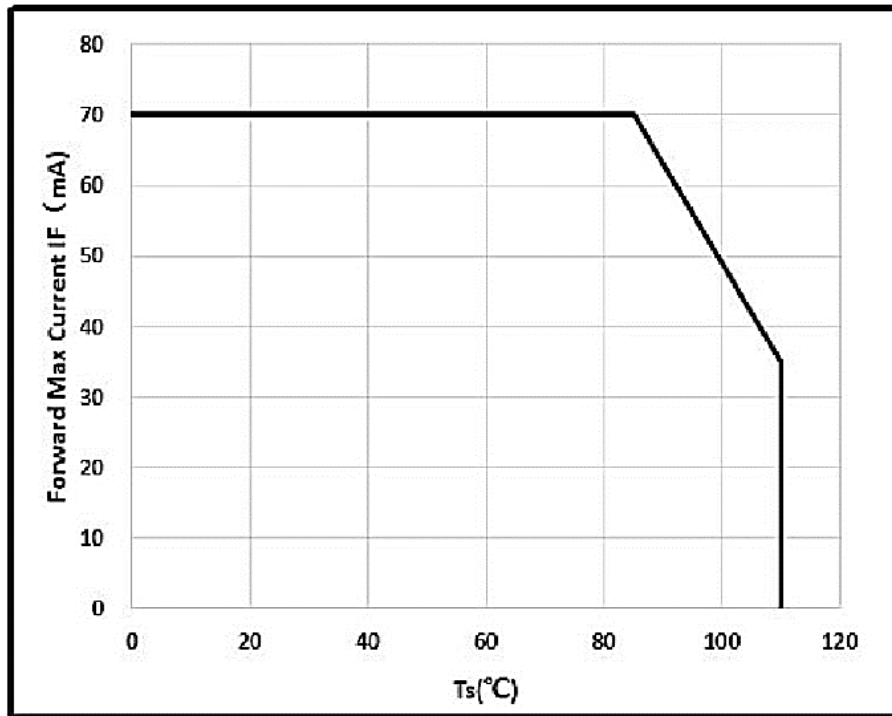



Figure 8. Radiation Diagram, $I_{rel} = f(\Phi)$

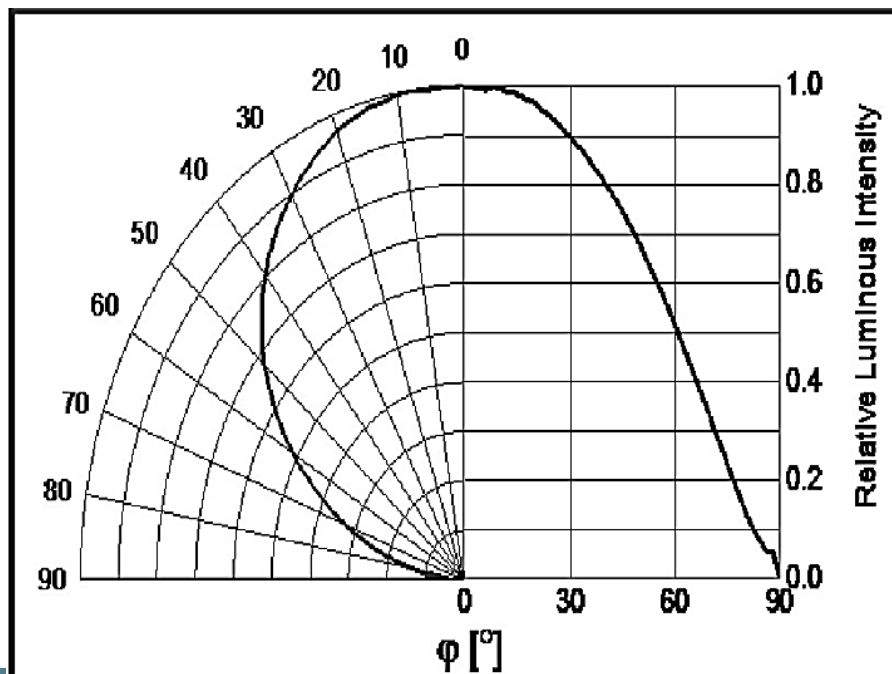

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

REFLOW SOLDERING CHARACTERISTICS

Product complies to MSL Level 2a acc. To JEDEC J-STD-020 D.01

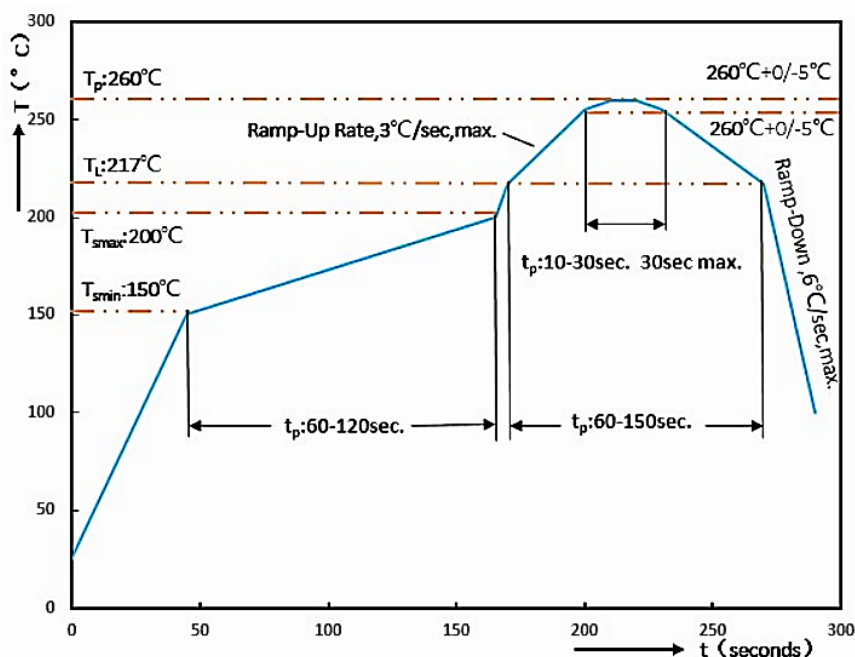


PROFILE FEATURE		PB-FREE ASSEMBLY
Average Ramp-up Rate (Ts Max to Tp)		3°C/second Max
Preheat	Temperature Min (Ts Min.)	150°C
	Temperature Max (Ts Max.)	200°C
	Time (ts Min. to ts Max.)	60 ~ 120 seconds
Time maintained above	Temperature (Tl)	217°C
	Time (tl)	60 ~ 150 seconds
Peak/Classification Temperature (Tp)		260 °C
Time within 5°C of actual Peak Temperature (tp)		30 seconds Max
Ramp-down rate		6 °C /Second Max.
Time 25 °C to Peak Temperature		8 minutes Max.
Suggest reflow times		3 Times Max.

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE


TAPE/REEL, 1000pcs/Reel (Unit: mm)

- All Devices are packed in accordance with EIA standard RS-481-A
- Cumulative Tolerance : Cumulative Tolerance/10 pitches to be $\pm 0.2\text{mm}$
- Adhesion Strength of Cover Tape Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10° to the carrier tape.
- Moisture Resistant Package

Tape

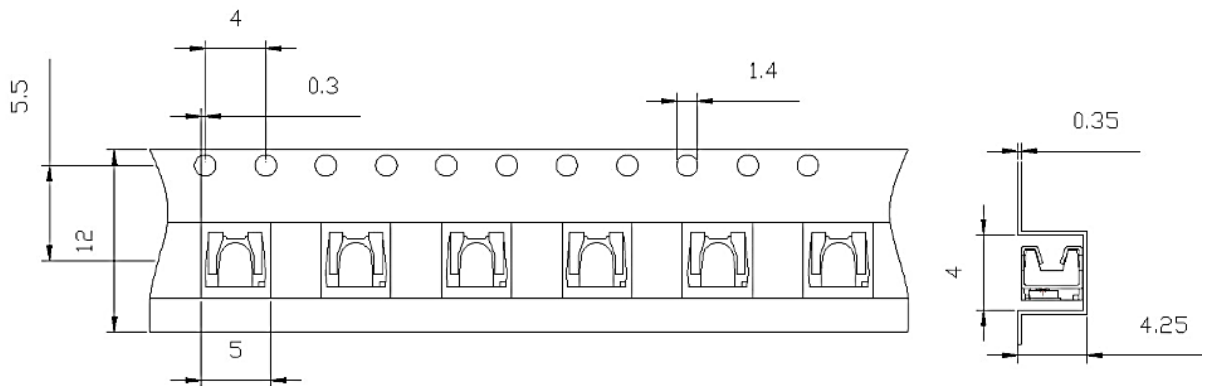

Reel

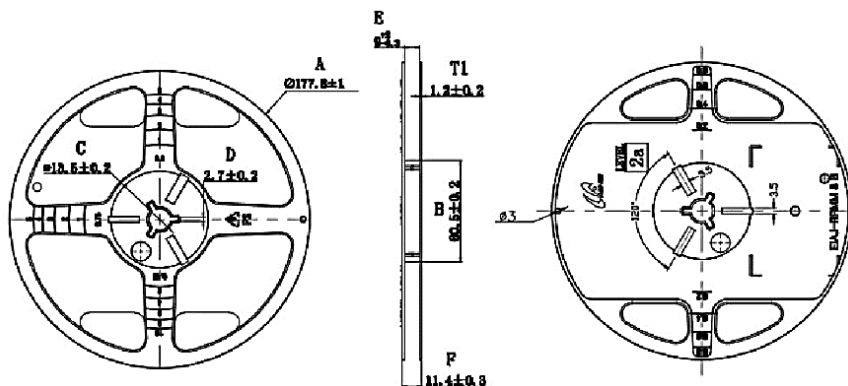

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

APPLICATION NOTES - Part I

- Storage: To avoid the moisture penetration, we recommend store in a dry box with a desiccant, The maximum storage temperature range is 40°C and a maximum humidity of RH60%.
- Use Precaution after Opening the Packaging: Recommend conditions after opening the package
a) Sealing b) Temperature : 30°C Humidity: Less than RH50% c) Recommend to use up before 72hrs after opening the package.
- If the package has been opened more than 4 weeks(MSL_2a) or the color desiccant changes, LED Components should be dried for 12hrs at 60±5°C. .
- Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering.
- Do not rapidly cool device after soldering.
- The LED should not be mounted on warped portion of PCB.
- The LED should not be used in any type of fluid such as water, oil, organic solvent and etc. When washing is required, IPA (Isopropyl Alcohol) should be used.
- When the LEDs are in operation the maximum current should be decided after measuring the package temperature.
- Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.
- The driving circuit must be designed to allow forward voltage only when it is ON or OFF. If the reverse voltage is applied to LED, migration can be generated resulting in LED damage.
- LEDs are sensitive to Electro-Static Discharge (ESD). Below is a list of suggestions that BND purposes to minimize these effects.
- The products are sensitive to static electricity or surge voltage. ESD can damage a die and it's Reliability. When handing the products, the following measures against electrostatic discharge are strongly recommended:

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

APPLICATION NOTES - Part II

- a) Increase in reverse leakage current lowered turn-on voltage
- b) Abnormal emissions from the LED at low current LED

The following recommendations are suggested to help minimize the potential for an ESD event.

- One or more recommended work area suggestions:
 - a) Dissipating static charge with conductive materials
 - b) Preventing charge generation with moisture
 - c) ESD safe storage containers ESD
- One or more personnel suggestion options:
 - a) Antistatic wrist-strap b) Antistatic material shoes c) Antistatic clothes
- Environmental controls: Humidity control (ESD gets worse in a dry environment).
- Handling Precautions: During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound. In general, LEDs should only be handled from the side. By the way, this also applies to LEDs Without a silicone sealant, since the surface can also become scratched.
- NextGen suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Please do not mold this products into another resin (epoxy, urethane, etc.) and do not handle this Product with acid or sulfur material in sealed space.

The following recommendations are suggested to help minimize the potential for an ESD event.

- One or more recommended work area suggestions:
 - a) Dissipating static charge with conductive materials
 - b) Preventing charge generation with moisture
 - c) ESD safe storage containers ESD
- One or more personnel suggestion options:
 - a) Antistatic wrist-strap b) Antistatic material shoes c) Antistatic clothes
- Environmental controls: Humidity control (ESD gets worse in a dry environment)

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE**APPLICATION NOTES - Part III**

- Handling Precautions: During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound. In general, LEDs should only be handled from the side. By the way, this also applies to LEDs Without a silicone sealant, since the surface can also become scratched.
- NextGen suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Please do not mold this products into another resin (epoxy, urethane, etc.) and do not handle this Product with acid or sulfur material in sealed space.
- The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet falls into the class exempt group (exposure time 10000 s). Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.
- Subcomponents of this device contain, in addition to other substances, metal filed materials including silver. Metal filed materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits Notes are described in the IEC60810.

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

GLOSSARY

- **Brightness:** Brightness values are measured during a current pulse of typically 20ms, with an internal reproducibility of $\pm 5\%$.
- **Wavelength:** The wavelength is measured at a current pulse of typically 20ms, with an internal reproducibility of ± 1.5 nm.
- **Forward Voltage:** The forward voltage is measured during a current pulse of typically 20ms, with an internal reproducibility of ± 0.05 V.
- **Reverse Operation:** Continuous reverse operation is not allowed.
- **Thermal Resistance:** R_{thJA} results from mounting on PC board.
- **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.

AUTO. SIDE EMITTING LED SMD 4040 BDD4S SERIES WHITE

IMPORTANT NOTES AND DISCLAIMER

- **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
- **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
- All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
- NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does *NextGen* assume any liability for application assistance or customer product design.
- *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
- *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
- *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.