




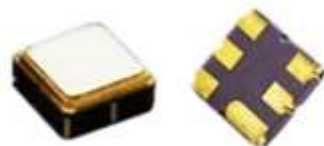
<b>SPECIFICATION SHEET NO.</b>	S0314 - SDF1G26852S129	
<b>ORIGINAL MFG/PART NO.</b>	TGS Crystals/SDF 1.26852GA TLF/SDF 1.26852G DX9129/DX9129	
<b>NEXTGEN PART CODE</b>	SDF1G26852S129	Indicate This Code For <a href="#">RFQ</a> /Order
<b>DATE</b>	Mar. 14, 2025	
<b>REVISION</b>	A4	Updated With Most Recent Data
<b>DESCRIPTION AND MAIN PARBMETRICS</b>	<p>SMD SAW Filter, 6 Pads, 3030 Type, Case code DCC6C, SDF Series</p> <p>Case code DCC6C, Case Dimension L3.0*W3.0*H1.25mm</p> <p>Center Frequency 1268.52MHz; Insertion Loss: 1.4dB Typical, 2.0dB Max.</p> <p>Amplitude Ripple: 1.2dB Max.; Usable Passband 20.5 MHz</p> <p>Operating Temp. Range -55°C ~ +125°C</p> <p>Reflow Profile Condition 260°C Max.</p> <p>Package in Tape/Reel, 3000pcs/Reel</p> <p>REACH/RoHS/RoHS III Compliant</p>	
<b>CUSTOMER</b>		
<b>CUSTOMER PART NUMBER</b>		
<b>CROSS REF. PART NUMBER</b>		
<b>MEMO</b>		

<b>VENDOR APPROVE</b>
<div> <div>Issued/Checked/Approved</div> <div>    </div> </div>
Effective Date: Mar. 14, 2025

<b>CUSTOMER APPROVE</b>
Date:

## MAIN FEATURE

- SMD SAW Filter 3030 Type 6 Pads
- Dimension L3.0\*W3.0\*H1.25mm
- Low-loss SAW Filter
- Low Amplitude Ripple
- Sharp Rejection As Both Out-bands
- Usable Passband 20.5MHz
- Package code DCC6C
- Ceramic Package For Surface Mounted Technology (SMT)
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level (MSL) 1
- Short Lead time
- Cross Competitors Parts and More
- REACH/RoHS/RoHS III Compliant



*Image shown is a representation only. Exact specifications should be obtained from the product dimension.*



## APPLICATION

- Bluetooth, Wireless Communication Set
- Communication Electronics
- GPS, Remote Control Application

## ELECTRICAL CHARBCTERISTICS

- See Page 5
- All Products Parameters are Subject To NextGen Components' Final Confirmation.

## HOW TO ORDER

- Please Follow Up Part Code Guide And Indicate NextGen Part Code SDF1G26852S129 For RFQ and Order.

## PART CODE GUIDE


**RFQ**

[Request For Quotation](#)

CODE	NAME	KEY SPECIFICATION OPTION
SDF	Series Code	SMD SAW Filter, 6 Pads, 3030 Type, Case Code DCC6C, Case Dimension L3.0*W3.0*H1.25mm
1G26852	Frequency Range Code	1G26852: 1.26852MHz
S129	Internal Control Code	Letter A~Z, a~z or Digits (1-9)
XX	Special/Custom Parameters Code	Blank: N/A XX: Letter A~Z, a~z or Digits (0~9) for Special/Custom Parameters


**DIMENSION** - Unit: mm, L3.0\*W3.0\*H1.25mm

Bottom View

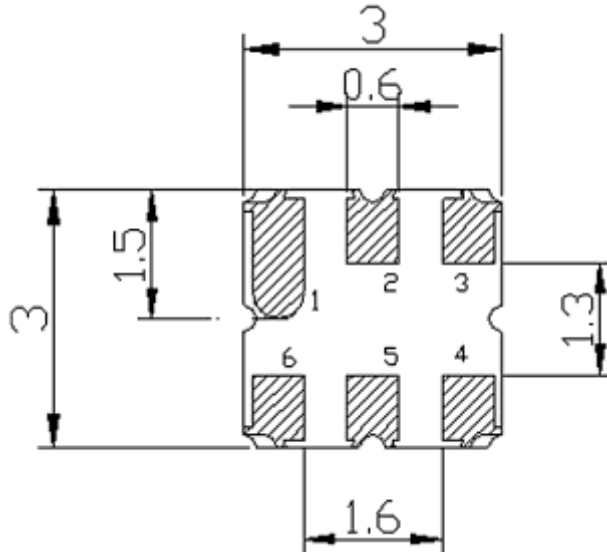

PIN	CONFIGURATION
2	Input
5	Output
1, 3, 4, 6	Grounded

Side View

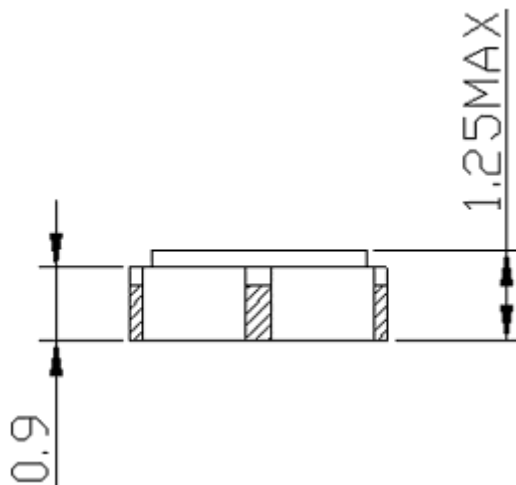

**MAX. RATING & CHARACTERISTICS** - At 25±2°C Ambient Temperature Unless Otherwise Specified.


PARAMETER	SYMBOLS	VALUE	UNITS
RF Power Level	P	10	dBm
DC Voltage	V <sub>dc</sub>	3	V
Operating Temperature Range	T <sub>A</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>stg</sub>	-55 to +125	°C

**ELECTRONICAL CHARACTERISTICS**


1) Test Temperature: 25°C±2°C 2) Terminating source impedance: 50Ω 3) Terminating load impedance: 50Ω .

PARAMETER		SYMBOLS	CHARACTERISTICS			
			MIN.	TYPICAL	MAX.	UNIT
Center Frequency		FC	-	1268.52	-	MHz
Insertion Loss		IL	-	1.4	2.0	dB
Insertion Loss 1258.29 ~ 1278.75MHz		IL	-	1.8	3.0	dB
Amplitude Ripple (p-p) 1258.29 ~ 1278.75MHz		Δa	-	0.5	1.2	dB
2 dB Bandwidth		BW <sub>2dB</sub>	29.7	32.65	-	MHz
Group Delay Ripple	1258.29 ~ 1278.75MHz	GDR	-	15	40	ns
Amplitude Consistency			-	±0.5	-	dB
Absolute Attenuation	DC ~ 1000.0MHz	α	35	40	-	dB
	1227.52MHz		40	45	-	dB
	1309.52MHz		55	65	-	dB
	1500.0 - 2500.0MHz		35	40	-	dB
	2500.0 - 3000.0MHz		30	35	-	dB
			-	-	-	
Input VSWR	1258.29 ~ 1278.75MHz		-	1.6:1	2.0:1	/
Output VSWR	1258.29 ~ 1278.75MHz		-	1.6:1	2.0:1	/


**MEASUREMENT CIRCUIT – FOR REFERENCE ONLY**

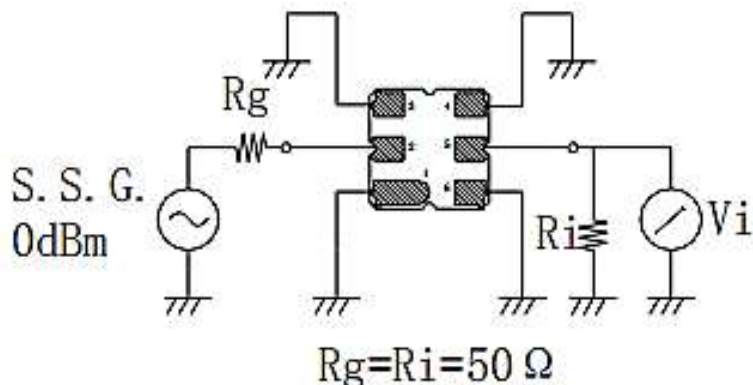


**RECOMMENDED SOLDERING PROFILE – FOR REFERENCE ONLY**

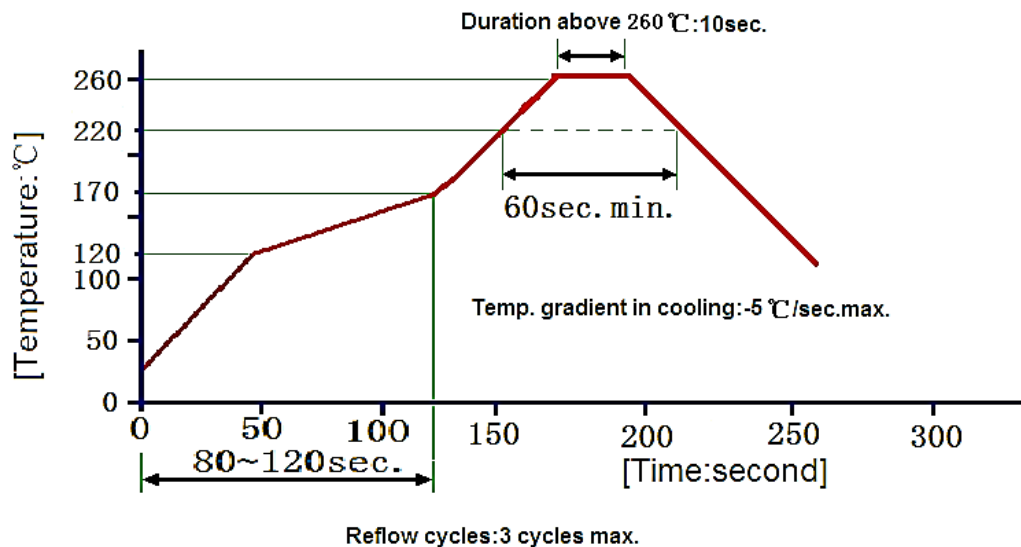

## FREQUENCY CHARACTERISTICS – FOR REFERENCE ONLY

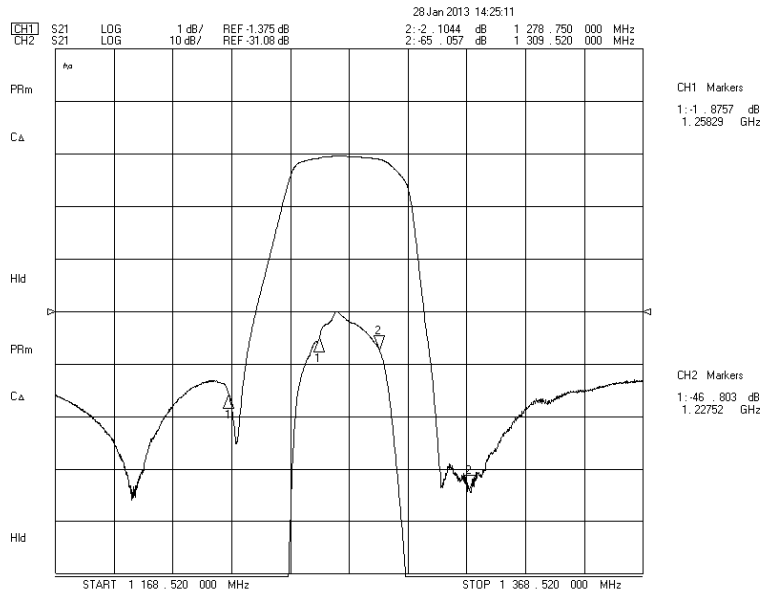


## Frequency Response

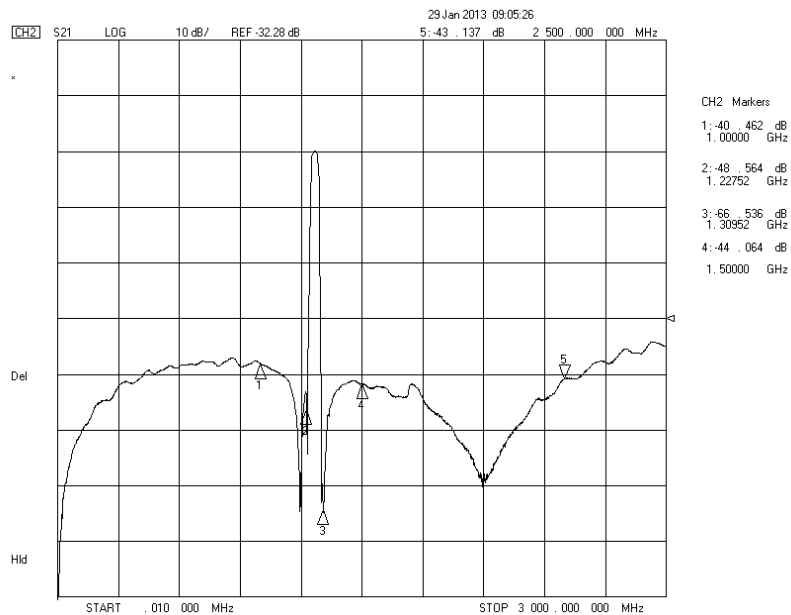


## Frequency Response (wideband)

## FREQUENCY CHARACTERISTICS – FOR REFERENCE ONLY

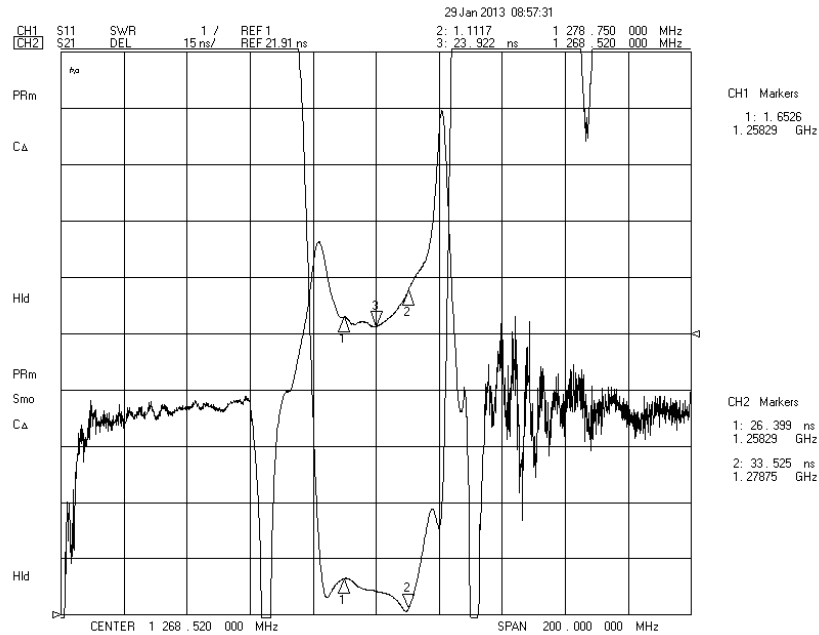


### Delay Ripple & S11 VSWR

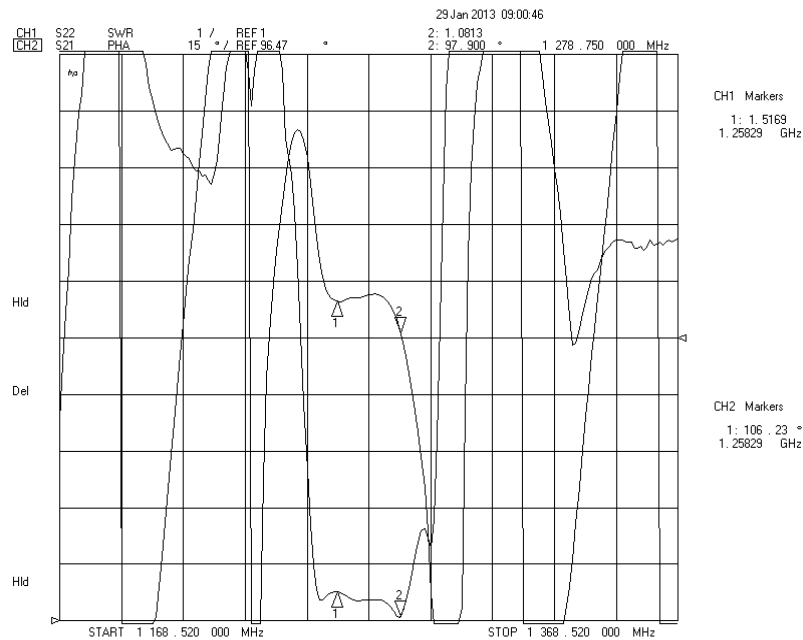


### Phase Linearity & S22 VSWR



**FREQUENCY CHARACTERISTICS – FOR REFERENCE ONLY**

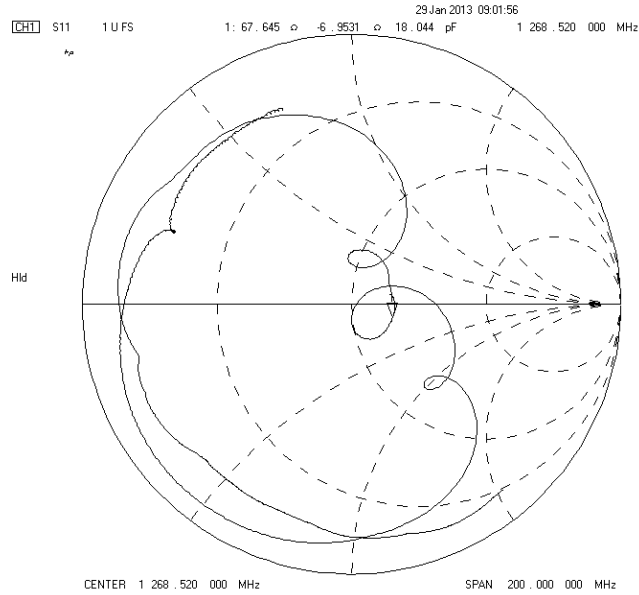

**S11 Smith Chart**

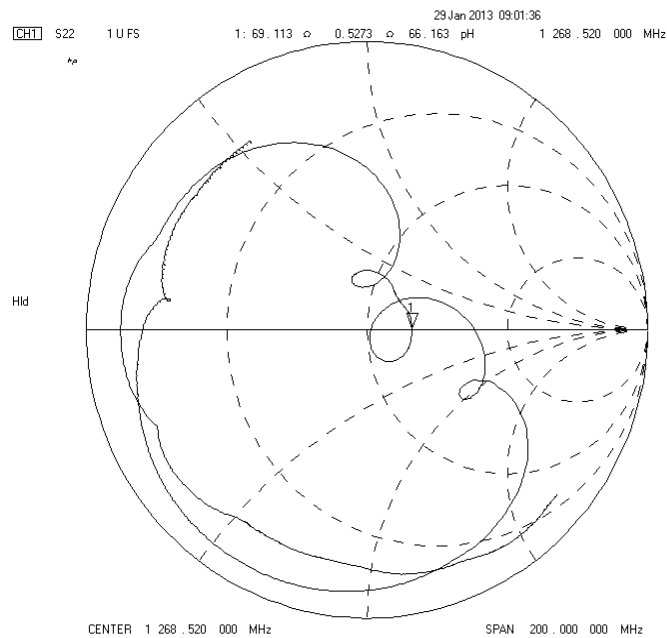


**S22 Smith Chart**


## RELIABILITY CHARACTERISTICS

TEST ITEMS	TEST METHOD AND CONDITIONS
Temperature Storage	<ul style="list-style-type: none"> <li>Temperature: <math>85^{\circ}\text{C} \pm 2^{\circ}\text{C}</math>, Duration: 250h , Recovery time: <math>2\text{h} \pm 0.5\text{h}</math></li> <li>Temperature: <math>-55^{\circ}\text{C} \pm 3^{\circ}\text{C}</math>, Duration: 250h ,Recovery time: <math>2\text{h} \pm 0.5\text{h}</math></li> </ul>
Humidity Test	<ul style="list-style-type: none"> <li>Conditions: <math>60^{\circ}\text{C} \pm 2^{\circ}\text{C}</math> , 90~95% RH, Duration: 250h</li> </ul>
Thermal Shock	<ul style="list-style-type: none"> <li>Heat cycle conditions: <math>\text{TA} = -55^{\circ}\text{C} \pm 3^{\circ}\text{C}</math>, <math>\text{TB} = 85^{\circ}\text{C} \pm 2^{\circ}\text{C}</math>, <math>t_1 = t_2 = 30\text{min}</math>,</li> <li>Switch time: <math>\leq 3\text{min}</math>, Cycle time: 100 times,</li> <li>Recovery time: <math>2\text{h} \pm 0.5\text{h}</math>.</li> </ul>
Vibration Fatigue	<ul style="list-style-type: none"> <li>Frequency of vibration: 10~55Hz, Amplitude:1.5mm</li> <li>Directions: X,Y and Z, Duration: 2h</li> </ul>
Drop Test	<ul style="list-style-type: none"> <li>Cycle time: 10 times, Height: 1.0m</li> </ul>
Solderability	<ul style="list-style-type: none"> <li>Temperature: <math>245^{\circ}\text{C} \pm 5^{\circ}\text{C}</math>, Duration: 3.0s--5.0s, Depth: DIP--2/3 , SMD--1/5</li> </ul>
Resistance to Soldering Heat	<ul style="list-style-type: none"> <li>Thickness of PCB:1mm , Solder condition: <math>260^{\circ}\text{C} \pm 5^{\circ}\text{C}</math> , Duration: <math>10 \pm 1\text{s}</math></li> <li>Temperature of Soldering Iron: <math>350^{\circ}\text{C} \pm 10^{\circ}\text{C}</math> , Duration: 3~4s ,</li> <li>Recovery time : <math>2 \pm 0.5\text{h}</math></li> </ul>
Remarks	<ul style="list-style-type: none"> <li>As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.</li> <li>Static voltage between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.</li> <li>Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.</li> <li>Only leads of component may be soldered. Please avoid soldering another part of component.</li> <li>There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.</li> </ul>


**TAPE DIMENSION** - Unit: mm, All Devices are packed in accordance with EIA standard RS-481-2.

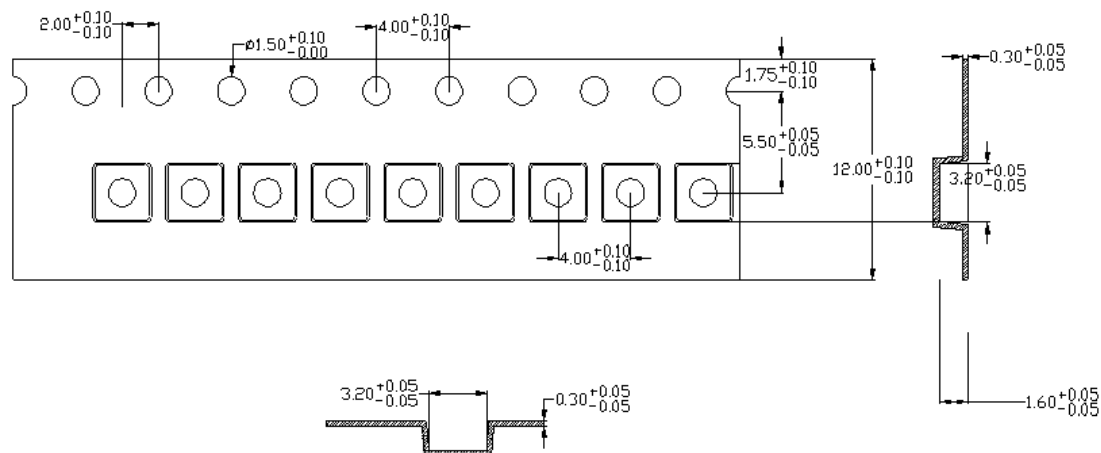

## CARRIER TAPE

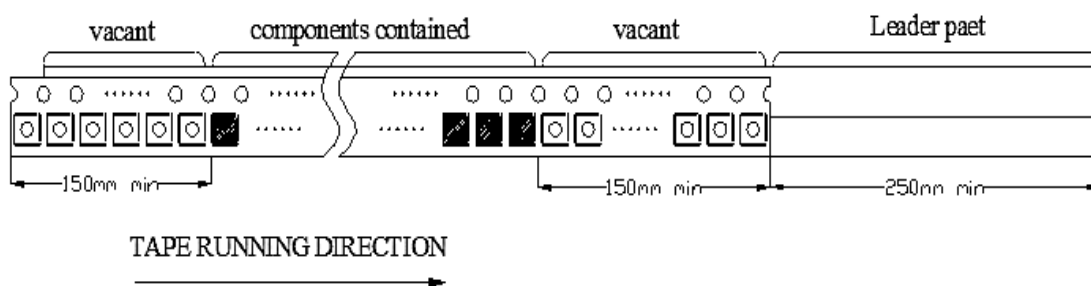

**REEL DIMENSION** - Unit: mm, 3000pcs/Reel.

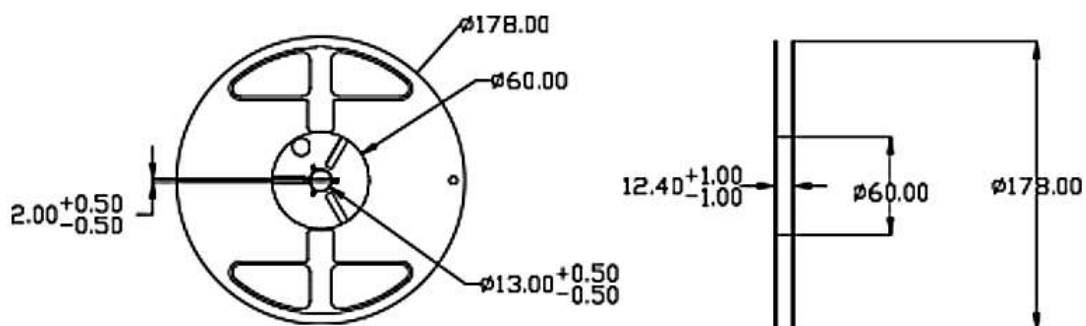

## IMPORTANT NOTES AND DISCLAIMER

1. **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does *NextGen* assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.