

SPECIFICATION SHEET NO.	S0714- C0402N470G500B	
ORIGINAL MFG/PART NO.	 Eyang MLCC/ C0402COG470G500NTB	
NEXTGEN PART CODE	C0402N470G500B	Indicate This Code For RFQ and New Order
DATE	Jul. 14, 2025	
REVISION	A1	Updated With Most Recent Data
DESCRIPTION AND MAIN PARAMETRICS	<p>Commercial Grade General Purpose MLCC, C Series, Case 0402, Metric 1005 Dimension L1.00*W0.50*H0.50mm, Thickness: 0.55mm Max.</p> <p>Temperature Characteristics NPO(COG), Capacitance 47pF, Tolerance $\pm 2\%$</p> <p>Rated Voltage 50V, Terminal Electrodes Type Cu and Plating Material Ni/Sn</p> <p>Operating Temp. Range -55°C ~+125°C</p> <p>Package in Tape/Reel, 10,000pcs/Reel</p> <p>REACH/RoHS/RoHS III Compliant</p>	
CUSTOMER		
CUSTOMER PART NUMBER		
CROSS REF. PART NUMBER		
MEMO		

VENDOR APPROVE			
Issued/Checked/Approved			
Effective Date: Jul. 14, 2025			

CUSTOMER APPROVE	
DATE:	

DESCRIPTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used. MLCC is made by NP0 (COG), X7R, X7S, X7T, X5R And X6S dielectric material and which provides product with high electrical precision, stability and reliability.



Image shown is a representation only. Exact specifications should be obtained from the product dimension.

MAIN FEATURE

- Temperature Characteristics:
Class 1 (Temperature Compensating Type): COG
Class 2 (High dielectric constant type): X7R, X7S, X7T, X6S and X5R
- Size Code: 0105(01005), 0201, 0402, 0603, 0805, 1206 and 1210
- Capacitance : 0.1pF~100μF
- Terminal Electrodes Type Cu and Plating Material Ni/Sn
- Commercial Grade Multilayer Ceramic Chip Capacitors
- REACH/RoHS/RoHS III Compliant



APPLICATION

- General Digital Circuit
- Power Supply by pass capacitors
- Consumer Electronics
- Telecommunication

ELECTRICAL CHARACTERISTICS

- See Page 5 For Different Part Code And Rated Voltage.
- All Products Parameters are Subject To NextGen Components' Final Confirmation.

HOW TO ORDER


- Please Follow Up Part Code Guide And Indicate NextGen Part Code C0402N470G500B
For RFQ and new Order.

PART CODE GUIDE

RFQ
 Request For Quotation

CODE	NAME	KEY SPECIFICATION OPTION
C	Series Code	A: Automotive Grade AEC-Q200 MLCC; B: Industrial Grade MLCC C: Commercial Grade General Purpose Medium-High Voltage MLCC E: Automotive Powertrain & Safety Grade AEC-Q200 MLCC P: High Q and High Power MLCC; Q: High Q Automotive Grade AEC-Q200 MLCC U: High Q MLCC (Internal Electrodes: Cu)
0402	Case Size	0201 (0603 Metric): L0.60*W0.30mm; 0402 (1005 Metric): L1.00*W0.50mm 0603 (1608 Metric): L1.60*W0.80mm; 0805 (2012 Metric): L2.00*W1.25mm 1206 (3216 Metric): L3.20*W1.60mm; 1210 (3225 Metric): L3.20*W2.50mm 1812 (4532 Metric): L4.50*W3.20mm; 1825 (4563 Metric):L4.50*W6.30mm 2220 (5750 Metric): L5.70*W5.00mm; 2225 (5763 Metric): L5.70*W6.30mm
N	Temperature Characteristics	N: NPO (COG); B: X7R; W: X5R; S: X6S; Y: Y5V; T: X7S; R: X7T, Please see page 6
470	Capacitance	Two significant digits followed by number of Zero, The 3rd digit signifies the multiplying factor, and letter R is decimal point. 8R2: 8.2pF; 470: 47pF; 332: 3300pF; 101: 100pF; 104: 0.1μF; 333: 0.033μF
G	Capacitance Tolerance	A: ±0.05pF; B: ±0.1pF; C: ±0.25pF; D: ±0.5pF; F: ±1%; G: ±2%; J: ±5%; K: ±10% L: ±15%; M: ±20%; N: ±30%; P: ±0.02pF; X: ±40%; S: 50%/-20%; Y: 150%/-20% Z: 80%/-20%
500	Rated Voltage	Two significant digits followed by No. of zeros. "R" is in place of decimal point. 6R3: 6.3VDC; 160: 16 VDC; 250: 25 VDC; 350: 35 VDC; 500: 50 VDC; 101: 100VDC
B	Case Thickness	B: 0.5 ± 0.05mm, See Page 4 (T's Symbol) for Different part code
XX	Internal Control Code	Blank: N/A; XX: Letter A~Z, a~z or digits (0~9) for Special/Custom Parameters

DIMENSION (Unit: mm)

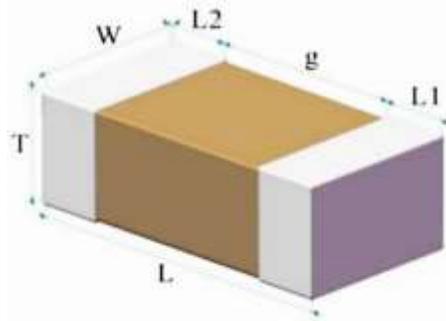

SIZE CODE	METRIC CODE	L	W	L1, L2	g	THICKNESS	
						T	Code
0402	1005	1.00 +0.20/-0.05	0.50 +0.20/-0.05	0.15~0.35	0.30min.	0.30 ±0.03	A
0402	1005	1.00 ±0.05	0.50 ±0.05	0.15~0.35	0.30min.	0.50 ±0.05	B
0402	1005	1.00 +0.15/-0.05	0.50 +0.15/-0.05	0.15~0.35	0.30min.	0.50 +0.15/-0.05	N
0402	1005	1.00 +0.20/-0.05	0.50 +0.20/-0.05	0.15~0.35	0.30min.	0.50 +0.20/-0.05	C
0402	1005	1.00 +0.30/-0.05	0.50 +0.30/-0.05	0.15~0.35	0.30min.	0.50 +0.30/-0.05	U
0603	1608	1.60 +0.20/-0.10	0.80 +0.20/-0.10	0.20~0.50	0.50min.	0.45 ±0.05	S
0603	1608	1.60 ±0.10	0.80 ±0.10	0.20~0.50	0.50min.	0.70 ±0.10	U
0603	1608	1.60 ±0.10	0.80 ±0.10	0.20~0.50	0.50min.	0.80 ±0.10	D
0603	1608	1.60 +0.20/-0.10	0.80 +0.20/-0.10	0.20~0.50	0.50min.	0.80 +0.20/-0.10	K
0603	1608	1.60 ±0.25	0.80 ±0.25	0.20~0.50	0.50min.	0.80 ±0.25	4
0603	1608	1.60 +0.30/-0	0.80 +0.30/-0	0.20~0.50	0.50min.	0.80 +0.30/-0	W
0603	1608	1.60 ±0.30	0.80 ±0.30	0.20~0.50	0.50min.	0.80 ±0.30	6

ELECTRICAL CHARACTERISTICS - FOR DIFFERENT PART CODE

NEXTGEN PART CODE	TEMP. COEFFICIENT	CAPACITANCE	TOLERANCE	VOLTAGE	THICKNESS (MAX.)	OPERATING TEMP. RANGE	CAPACITANCE CHARACTERISTIC
	-	-	-	V	mm	°C	-
C0402N101J500B	NPO(COG)	100 pF	±5%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N102J500B	NPO(COG)	1000 pF	±5%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N330J500B	NPO(COG)	33 pF	±5%	50	0.55	-55 ~+125	0±30ppm/°C
C0402W104K500C	X5R	0.1 µF	±10%	50	0.70	-55 ~+85	±15%
C0402W333M160B	X5R	0.033 µF	±20%	16	0.55	-55 ~+85	±15%
C0402W475M6R3C	X5R	4.7 µF	±20%	6.3	0.70	-55 ~+85	±15%
C0402B102K500B	X7R	1000 pF	±10%	50	0.55	-55 ~+125	±15%
C0402B103K500B	X7R	0.01 µF	±10%	50	0.55	-55 ~+125	±15%
C0402B104K500C	X7R	0.1 µF	±10%	50	0.70	-55 ~+125	±15%
C0603N100F500D	NPO (COG)	10 pF	±1%	50	0.90	-55 ~+125	0±30ppm/°C
C0603N5R6C500D	NPO (COG)	5.6 pF	±0.25pF	50	0.90	-55 ~+125	0±30ppm/°C
C0603W106M6R3K	X5R	10 µF	±20%	6.3	1.00	-55 ~+85	±15%
C0603W475K160K	X5R	4.7 µF	±10%	16	1.00	-55 ~+85	±15%
C0402W104K500B	X5R	0.1 µF	±10%	50	0.55	-55 ~+85	±15%
C0402B104K500B	X7R	0.1 µF	±10%	50	0.55	-55 ~+125	±15%
C0402B104K160B	X7R	0.1 µF	±10%	16	0.55	-55 ~+125	±15%
C0402W104K250B	X5R	0.1 µF	±10%	25	0.55	-55 ~+85	±15%
C0402B104K250B	X7R	0.1 µF	±10%	25	0.55	-55 ~+125	±15%
C0402N100J500B	NPO (COG)	10 pF	±5%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N220J500B	NPO (COG)	22 pF	±5%	50	0.55	-55 ~+125	0±30ppm/°C

ELECTRICAL CHARACTERISTICS - FOR DIFFERENT PART CODE

NEXTGEN PART CODE	TEMP. COEFFICIENT	CAPACITANCE	TOLERANCE	VOLTAGE	THICKNESS (MAX.)	OPERATING TEMP. RANGE	CAPACITANCE CHARACTERISTIC
	-	-	-	V	mm	°C	-
C0402W106M100C	X5R	10 μ F	$\pm 20\%$	10	0.70	-55 ~+85	$\pm 15\%$
C0402N120J500B	NP0(C0G)	12 pF	$\pm 5\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402B471K500B	X7R	470 pF	$\pm 10\%$	50	0.55	-55 ~+125	$\pm 15\%$
C0402N150J500B	NP0(C0G)	15 pF	$\pm 5\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402B222K500B	X7R	2200 pF	$\pm 10\%$	50	0.55	-55 ~+125	$\pm 15\%$
C0402N180J500B	NP0(C0G)	18 pF	$\pm 5\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N470J500B	NP0(C0G)	47 pF	$\pm 5\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402B101K500B	X7R	100 pF	$\pm 10\%$	50	0.55	-55 ~+125	$\pm 15\%$
C0402N270J500B	NP0(C0G)	27 pF	$\pm 5\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402S105K6R3B	X6S	1 μ F	$\pm 10\%$	6.3	0.55	-55 ~+105	$\pm 22\%$
C0402N100D500B	NP0(C0G)	10 pF	± 0.5 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402B221K500B	X7R	220 pF	$\pm 10\%$	50	0.55	-55 ~+125	$\pm 15\%$
C0402B331K500B	X7R	330 pF	$\pm 10\%$	50	0.55	-55 ~+125	$\pm 15\%$
C0402N8R2C500B	NP0(C0G)	8.2 pF	± 0.25 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N5R6C500B	NP0(C0G)	5.6 pF	± 0.25 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N300J500B	NP0(C0G)	30 pF	$\pm 5\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N1R0C500B	NP0(C0G)	1.0 pF	± 0.25 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402W225M6R3B	X5R	2.2 μ F	$\pm 20\%$	6.3	0.55	-55 ~+85	$\pm 15\%$
C0402W106M6R3C	X5R	10 μ F	$\pm 20\%$	6.3	0.70	-55 ~+85	$\pm 15\%$
C0402W475M100C	X5R	4.7 μ F	$\pm 20\%$	10	0.70	-55 ~+85	$\pm 15\%$

ELECTRICAL CHARACTERISTICS - FOR DIFFERENT PART CODE

NEXTGEN PART CODE	TEMP. COEFFICIENT	CAPACITANCE	TOLERANCE	VOLTAGE	THICKNESS (MAX.)	OPERATING TEMP. RANGE	CAPACITANCE CHARACTERISTIC
	-	-	-	V	mm	°C	-
C0402W104K160B	X5R	0.1 μ F	$\pm 10\%$	16	0.55	-55 ~+85	$\pm 15\%$
C0402N1R0B500B	NP0(COG)	1.0 pF	± 0.1 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402W474K250N	X5R	0.47 μ F	$\pm 10\%$	25	0.65	-55 ~+85	$\pm 15\%$
C0402S475M6R3C	X6S	4.7 μ F	$\pm 20\%$	6.3	0.70	-55 ~+105	$\pm 22\%$
C0402W105K100B	X5R	1.0 μ F	$\pm 10\%$	10	0.55	-55 ~+85	$\pm 15\%$
C0402W105K160B	X5R	1.0 μ F	$\pm 10\%$	16	0.55	-55 ~+85	$\pm 15\%$
C0402S105K4R0C	X6S	1.0 μ F	$\pm 10\%$	4.0	0.70	-55 ~+105	$\pm 22\%$
C0402W475K100C	X5R	4.7 μ F	$\pm 10\%$	10	0.70	-55 ~+85	$\pm 15\%$
C0402N5R6D500B	NP0(COG)	5.6 pF	± 0.5 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402W105K6R3B	X5R	1.0 μ F	$\pm 10\%$	6.3	0.55	-55 ~+85	$\pm 15\%$
C0402W105K250B	X5R	1.0 μ F	$\pm 10\%$	25	0.55	-55 ~+85	$\pm 15\%$
C0402S105K100C	X6S	1.0 μ F	$\pm 10\%$	10	0.70	-55 ~+105	$\pm 22\%$
C0402W474K100B	X5R	0.47 μ F	$\pm 10\%$	10	0.55	-55 ~+85	$\pm 15\%$
C0402N100F500B	NP0(COG)	10 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N330G500B	NP0(COG)	33 pF	$\pm 2\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N330F500B	NP0(COG)	33 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402W225K250C	X5R	2.2 μ F	$\pm 10\%$	25	0.70	-55 ~+85	$\pm 15\%$
C0402N180F500B	NP0(COG)	18 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402W225M100B	X5R	2.2 μ F	$\pm 20\%$	10	0.55	-55 ~+85	$\pm 15\%$
C0402N220F500B	NP0(COG)	22 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C

ELECTRICAL CHARACTERISTICS - FOR DIFFERENT PART CODE

NEXTGEN PART CODE	TEMP. COEFFICIENT	CAPACITANCE	TOLERANCE	VOLTAGE	THICKNESS (MAX.)	OPERATING TEMP. RANGE	CAPACITANCE CHARACTERISTIC
	-	-	-	V	mm	°C	-
C0402W225K6R3B	X5R	2.2 μ F	$\pm 10\%$	6.3	0.55	-55 ~+85	$\pm 15\%$
C0402N8R2B500B	NP0(C0G)	8.2 pF	± 0.1 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N8R2D500B	NP0(C0G)	8.2 pF	± 0.5 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N120F500B	NP0(C0G)	12 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N151F500B	NP0(C0G)	150 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402W474K160N	X5R	0.47 μ F	$\pm 10\%$	16	0.65	-55 ~+85	$\pm 15\%$
C0402S106M4ROC	X6S	10 μ F	$\pm 20\%$	4.0	0.70	-55 ~+105	$\pm 22\%$
C0402S225K6R3N	X6S	2.2 μ F	$\pm 10\%$	6.3	0.65	-55 ~+105	$\pm 22\%$
C0402W225K160N	X5R	2.2 μ F	$\pm 10\%$	16	0.65	-55 ~+85	$\pm 15\%$
C0402W225K100N	X5R	2.2 μ F	$\pm 10\%$	10	0.65	-55 ~+85	$\pm 15\%$
C0402N5R6B500B	NP0(C0G)	5.6 pF	± 0.1 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402S225K100C	X6S	2.2 μ F	$\pm 10\%$	10	0.70	-55 ~+105	$\pm 22\%$
C0402N120G500B	NP0(C0G)	12 pF	$\pm 2\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N470F500B	NP0(C0G)	47 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402S105K160C	X6S	1 μ F	$\pm 10\%$	16	0.70	-55 ~+105	$\pm 22\%$
C0402N1R0A500B	NP0(C0G)	1 pF	± 0.05 pF	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N270G500B	NP0(C0G)	27 pF	$\pm 2\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N150F500B	NP0(C0G)	15 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N270F500B	NP0(C0G)	27 pF	$\pm 1\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C
C0402N150G500B	NP0(C0G)	15 pF	$\pm 2\%$	50	0.55	-55 ~+125	0 ± 30 ppm/°C

ELECTRICAL CHARACTERISTICS - FOR DIFFERENT PART CODE

NEXTGEN PART CODE	TEMP. COEFFICIENT	CAPACITANCE	TOLERANCE	VOLTAGE	THICKNESS (MAX.)	OPERATING TEMP. RANGE	CAPACITANCE CHARACTERISTIC
	-	-	-	V	mm	°C	-
C0402N220G500B	NPO(C0G)	22 pF	± 2%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N101G500B	NPO(C0G)	100 pF	± 2%	50	0.55	-55 ~+125	0±30ppm/°C
C0402W475M160C	X5R	4.7 μF	± 20%	16	0.70	-55 ~+85	±15%
C0402N101F500B	NPO(C0G)	100 pF	± 1%	50	0.55	-55 ~+125	0±30ppm/°C
C0402W475K6R3C	X5R	4.7 μF	± 10%	6.3	0.70	-55 ~+85	±15%
C0402W104K350C	X5R	0.1 μF	± 10%	35	0.70	-55 ~+85	±15%
C0402S105K250C	X6S	1 μF	± 10%	25	0.70	-55 ~+105	±22%
C0402N470G500B	NPO(C0G)	47 pF	± 2%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N180G500B	NPO(C0G)	18 pF	± 2%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N300F500B	NPO(C0G)	30 pF	± 1%	50	0.55	-55 ~+125	0±30ppm/°C
C0402N101J101B	NPO(C0G)	100 pF	± 5%	100	0.55	-55 ~+125	0±30ppm/°C
C0402B102K101B	X7R	1 nF	± 10%	100	0.55	-55 ~+125	±15%
C0402B221K101B	X7R	220 pF	± 10%	100	0.55	-55 ~+125	±15%
C0603S106M4R0K	X6S	10 μF	± 20%	4.0	1.0	-55 ~+105	±22%
C0603W106K100K	X5R	10 μF	± 10%	100	1.0	-55 ~+85	±15%
C0603W106M250K	X5R	10 μF	± 20%	25	1.0	-55 ~+85	±15%
C0603W226M6R3K	X5R	22 μF	± 20%	6.3	1.0	-55 ~+85	±15%
C0603W106M100K	X5R	10 μF	± 20%	10	1.0	-55 ~+85	±15%
C0603W106M160K	X5R	10 μF	± 20%	16	1.0	-55 ~+85	±15%
C0603S475K6R3D	X6S	4.7 μF	± 10%	6.3	0.9	-55 ~+105	±22%

TEMPERATURE CHARACTERISTICS

TEMPERATURE CHARACTERISTICS	OPERATING TEMP. RANGE	TEMPERATURE CHARACTERISTICS		
		TEMP. COEFF. Or CAP. CHANGE	TEMP. RANGE	REF. TEMP.
C0G	-55°C~125°C	0±30ppm/°C	25°C~125°C	25°C
X7R	-55°C~125°C	±15%	-55°C~125°C	25°C
X7S	-55°C~125°C	±22%	-55°C~125°C	25°C
X7T	-55°C~125°C	+22%/-33%	-55°C~125°C	25°C
X6S	-55°C~105°C	±22%	-55°C~105°C	25°C
X5R	-55°C~85°C	±15%	-55°C~85°C	25°C

TERMINATION TYPE

CODE	TERMINAL ELECTRODES	PLATING MATERIAL
N	Cu	Ni/Sn
P	Cu+AgPd or Cu+AgPdCu	
C	Cu	Cu
K	Cu	Ni/Au
T	Cu/Ag (Resin)	Ni/Sn

CAPACITANCE TABLE - CLASS 2- X7R

SIZE CODE	METRIC CODE	TEMPERATURE CHARACTERISTICS	RATED VOLTAGE	THICKNESS CODE	CAPACITANCE
0402	1005	X7R	50V	B	100pF~100nF
0402	1005	X7R	50V	N	100nF
0402	1005	X7R	50V	C	100nF
0402	1005	X7R	25V	B	100pF~100nF
0402	1005	X7R	25V	N	22nF~330nF
0402	1005	X7R	25V	C	82nF~220nF
0402	1005	X7R	16V	B	1nF~220nF
0402	1005	X7R	16V	N	22nF~470nF
0402	1005	X7R	10V	B	1nF~220nF
0402	1005	X7R	10V	N	22nF~470nF
0402	1005	X7R	6.3V	B	1nF~220nF
0402	1005	X7R	6.3V	N	22nF~470nF
0402	1005	X7R	6.3V	N	1μF
0603	1608	X7R	50V	D	220pF~820nF
0603	1608	X7R	50V	K	47nF~470nF
0603	1608	X7R	25V	D	100nF~820nF
0603	1608	X7R	25V	D	1μF
0603	1608	X7R	25V	K	100nF~1μF
0603	1608	X7R	16V	D	1nF~1μF
0603	1608	X7R	16V	K	100nF~1μF

CAPACITANCE TABLE - CLASS 2-X7R\X5R

SIZE CODE	METRIC CODE	TEMPERATURE CHARACTERISTICS	RATED VOLTAGE	THICKNESS CODE	CAPACITANCE
0603	1608	X7R	10V	D	100nF~820nF
0603	1608	X7R	10V	D	2.2μF
0603	1608	X7R	10V	K	100nF~1μF
0603	1608	X7R	10V	K	2.2μF
0603	1608	X7R	6.3V	D	100nF~820nF
0603	1608	X7R	6.3V	K	100nF~1μF
0603	1608	X7R	6.3V	K	2.2μF
0603	1608	X7R	6.3V	K	4.7μF
0402	1005	X5R	50V	B	100pF~100nF
0402	1005	X5R	50V	N	27nF~47nF
0402	1005	X5R	50V	C	56nF~470nF
0402	1005	X5R	35V	B	100pF~100nF
0402	1005	X5R	35V	C	56nF~100nF
0402	1005	X5R	25V	B	100pF~1μF
0402	1005	X5R	25V	N	82nF~470nF
0402	1005	X5R	25V	C	270nF~2.2μF
0402	1005	X5R	16V	B	100pF~1μF
0402	1005	X5R	16V	N	120nF~470nF
0402	1005	X5R	16V	N	2.2μF
0402	1005	X5R	10V	B	100pF~1μF

CAPACITANCE TABLE - CLASS 2- X5R

SIZE CODE	METRIC CODE	TEMPERATURE CHARACTERISTICS	RATED VOLTAGE	THICKNESS CODE	CAPACITANCE
0402	1005	X5R	10V	B	2.2μF
0402	1005	X5R	10V	N	120nF~470nF
0402	1005	X5R	10V	N	2.2μF
0402	1005	X5R	10V	C	4.7μF
0402	1005	X5R	6.3V	B	100nF~820nF
0402	1005	X5R	6.3V	B	1μF
0402	1005	X5R	6.3V	B	2.2μF
0402	1005	X5R	6.3V	N	270nF~4.7μF
0402	1005	X5R	6.3V	C	4.7μF
0402	1005	X5R	6.3V	C	10μF
0402	1005	X5R	6.3V	U	10μF
0402	1005	X5R	4V	C	10μF
0402	1005	X5R	4V	C	22μF
0603	1608	X5R	50V	D	220pF~820nF
0603	1608	X5R	50V	D	1μF
0603	1608	X5R	50V	K	2.2μF
0603	1608	X5R	35V	D	680nF~820nF
0603	1608	X5R	25V	S	680nF~820nF
0603	1608	X5R	25V	D	100nF~820nF
0603	1608	X5R	25V	D	1μF

CAPACITANCE TABLE - CLASS 2- X7S\X7T\X6S

SIZE CODE	METRIC CODE	TEMPERATURE CHARACTERISTICS	RATED VOLTAGE	THICKNESS CODE	CAPACITANCE
0603	1608	X7S	16V	K	4.7μF
0603	1608	X7S	10V	K	4.7μF
0603	1608	X7S	6.3V	K	4.7μF
0402	1005	X7T	10V	B	1μF
0402	1005	X7T	10V	C	2.2μF
0402	1005	X7T	6.3V	B	1μF
0402	1005	X7T	6.3V	N	2.2μF
0402	1005	X7T	6.3V	C	4.7μF
0402	1005	X7T	4V	N	4.7μF
0603	1608	X7T	10V	K	2.2μF~10μF
0603	1608	X7T	6.3V	K	10μFF
0402	1005	X6S	50V	B	15nF~47nF
0402	1005	X6S	50V	C	100nF
0402	1005	X6S	25V	B	68nF~100nF
0402	1005	X6S	25V	C	220nF~1.0μF
0402	1005	X6S	25V	N	220nF~470nF
0402	1005	X6S	16V	B	100nF~1μF
0402	1005	X6S	16V	N	220nF~470nF
0402	1005	X6S	16V	C	220nF
0402	1005	X6S	16V	C	1μF

CAPACITANCE TABLE - CLASS 2- X6S

SIZE CODE	METRIC CODE	TEMPERATURE CHARACTERISTICS	RATED VOLTAGE	THICKNESS CODE	CAPACITANCE
0402	1005	X6S	16V	C	2.2μF
0402	1005	X6S	10V	B	1μF
0402	1005	X6S	10V	N	220nF~470nF
0402	1005	X6S	10V	N	4.7μF
0402	1005	X6S	10V	C	2.2μF
0402	1005	X6S	6.3V	B	1μF
0402	1005	X6S	6.3V	N	220nF~470nF
0402	1005	X6S	6.3V	N	2.2μF
0402	1005	X6S	6.3V	C	1μF~4.7μF
0402	1005	X6S	4V	B	2.2μF~10μF
0402	1005	X6S	4V	C	10μF
0603	1608	X6S	25V	K	2.2μF
0603	1608	X6S	25V	K	4.7μF
0603	1608	X6S	16V	D	1μF
0603	1608	X6S	16V	K	2.2μF~10μF
0603	1608	X6S	10V	K	10μF
0603	1608	X6S	6.3V	D	4.7μF
0603	1608	X6S	6.3V	K	4.7μF
0603	1608	X6S	6.3V	K	10μF
0603	1608	X6S	6.3V	W	22μF

STORAGE CONDITIONS

- Storage conditions: The recommended temperature is less than 30°C. A temperature is +5°C to +40°C and a relative humidity is 20% to 70% as a standard condition.(MSL Level 1) MLCC may be affected by the storage conditions. Please use them promptly after delivery. High temperature and humidity conditions and/or prolonged storage may cause deterioration of the packaging materials. If more than six months have elapsed since delivery, check packaging, mounting, etc. before use.
- Corrosive gas can react with the termination (external) electrodes or lead wires of capacitors, and result in poor solderability. Do not store the capacitors in an atmosphere consisting of corrosive gas (e.g. hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)

MLCC APPLICATION OF TECHNICAL REQUIREMENTS


- Circuit Design

Operating Temperature: a. Do not use capacitor above the maximum allowable operating temperature. b. Surface temperature including self-heating should be below maximum operating temperature.

Operating Voltage: The operating voltage for capacitors must always be lower than their rated voltage.

- PCB Design


Design of Land-patterns: When the capacitors are mounted on a PCB, the amount of solder at the terminations has a direct effect on the performance of the capacitors. The greater the amount of solder, the higher the stress on the capacitor. Therefore, when designing land-patterns, it is necessary to consider the appropriate size and configuration of the solder pads. Size and recommended land dimensions are shown in the following figure and table

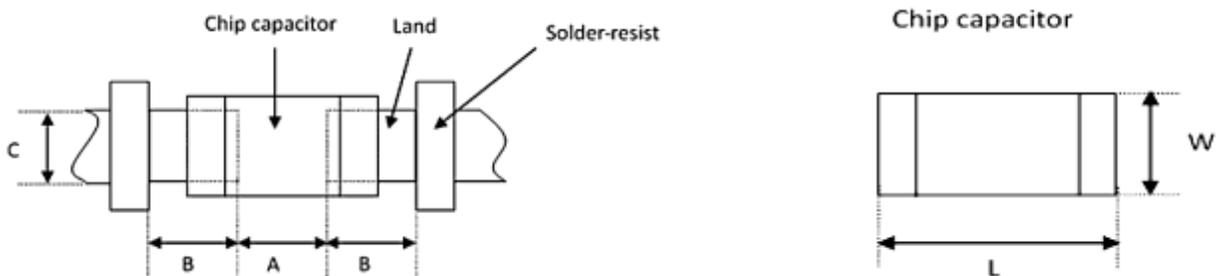

Recommended land dimensions for reflow-soldering (Unit: mm):

SIZE CODE	METRIC CODE	LENGTH	WIDTH	TOLERANCE	A	B	C
0402	1005	1	0.5	±0.05	0.30~0.50	0.35~0.45	0.40~0.60
0402	1005	1	0.5	±0.15 or ±0.20	0.40~0.60	0.40~0.50	0.50~0.70
0603	1608	1.6	0.8	±0.10	0.60~0.80	0.60~0.70	0.60~0.80
0603	1608	1.6	0.8	±0.20	0.70~0.90	0.70~0.80	0.80~1.00


Capacitor Layout on PC Board: Mechanical stress varies according to the location of capacitors on PC board. The recommendation for better design is as follows

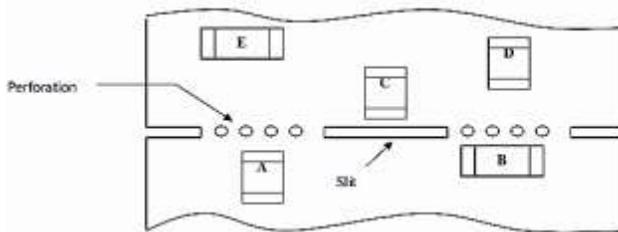


The stress in capacitors is in the following order: A>B=C>D>E

Pay attention not to bend or distort the PC board otherwise the capacitor may crack. Please refer to the following examples of good and bad capacitor layout.

Not recommended:

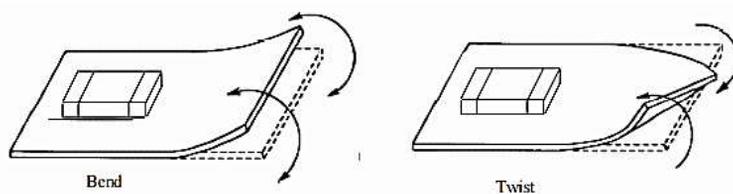


Recommended:

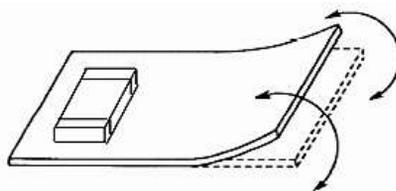


Solder Buildup and Soldering:

a. Examples of soldering method not recommended

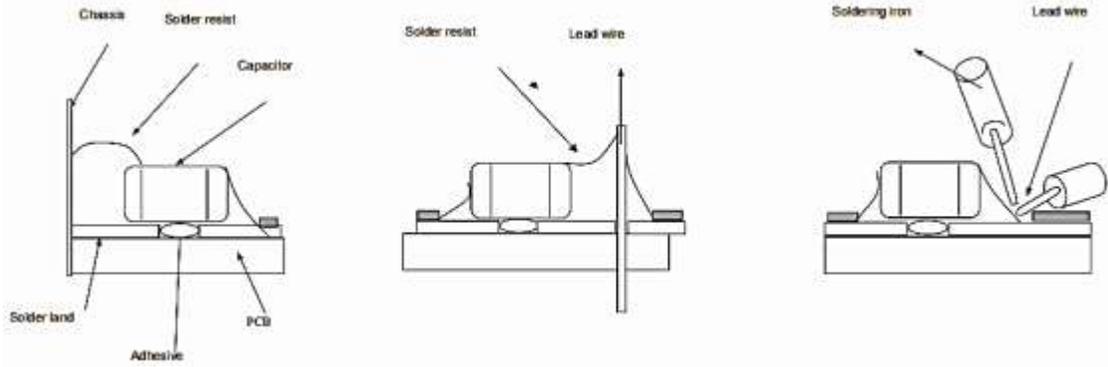

b. Examples of soldering method recommended

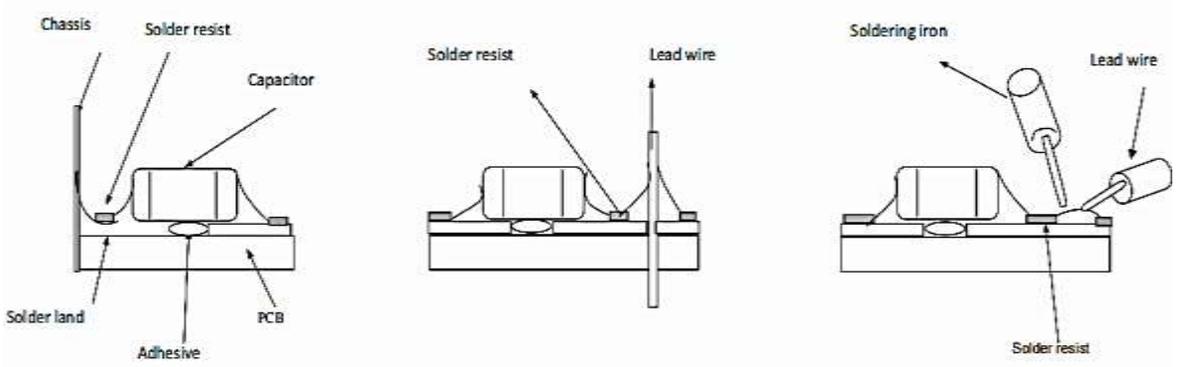

- Consideration for Automatic Placement

If the mounting head is adjusted too low, it may induce excessive stress in the chip capacitor to result in cracking.

Please take following precautions

- Adjust the bottom dead center of the mounting head to reach on the PC board surface and not press it;
- Adjust the mounting head pressure to be 1N to 3N of static weight;
- To minimize the impact energy from mounting head, it is important to provide support from the bottom side of the PC board.

Please refer to the following samples:





- Consideration for Automatic Placement

If the mounting head is adjusted too low, it may induce excessive stress in the chip capacitor to result in cracking.


Please take following precautions

- Adjust the bottom dead center of the mounting head to reach on the PC board surface and not press it ;
- Adjust the mounting head pressure to be 1N to 3N of static weight ;
- To minimize the impact energy from mounting head, it is important to provide support from the bottom side of the PC board.

Please refer to the following samples:

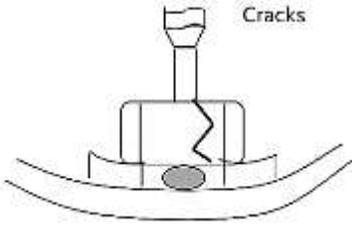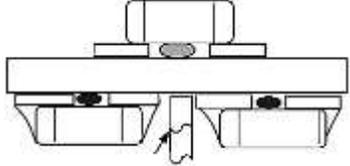MOUNTING	NOT RECOMMENDED	RECOMMENDED
Single - sided Mounting	 <p>Cracks</p>	 <p>Supporting pin</p>
Double-sided Mounting	 <p>Solder peeling Cracks</p>	 <p>Support pin</p>


- Recommended Profile Conditions Part I– Fore Reference Only

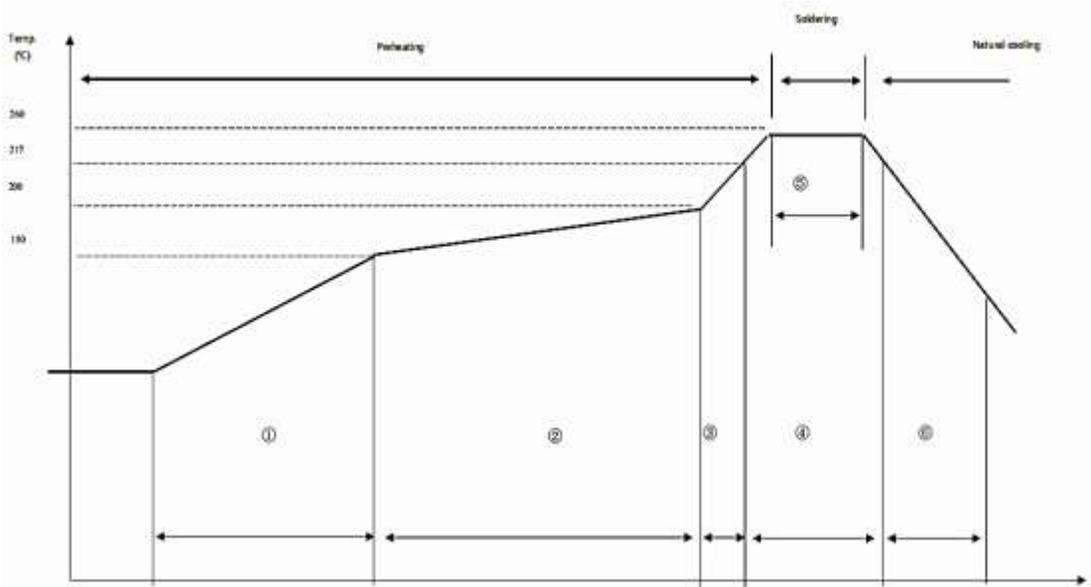

NO.	REFLOW SOLDERING ZONE	REFLOW SOLDERING CONDITION
①	Preheating 1	≤3°C/s; ≥60s
②	Constant temperature	150 ~ 200°C; 60~120s; ≤1°C/s
③	Preheating 1	1~5°C/s
④	Soldering 1	Above 217°C, 60~150s
⑤	Soldering 1	Above 260°C, over 10s
⑥	Natural cooling	≤6°C/s

- Recommended Profile Conditions Part II – Fore Reference Only

a. Excessive solder will induce higher tensile force in chip capacitor when temperature changes and result in cracking. Insufficient solder may detach the capacitor from the PC board. The ideal condition is to have solder mass controlled to $1/2$ to $1/3$ of the thickness of the capacitor.

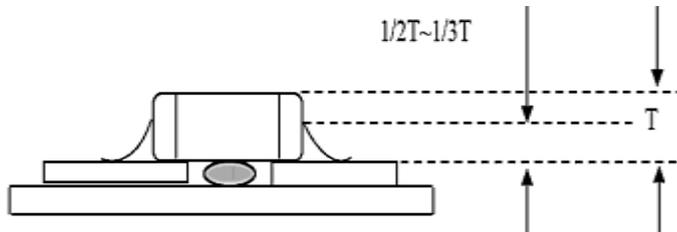

b. Soldering duration should be kept as close to recommended times as possible, because excessive duration can detrimentally affect solderability.

c. The peak temperature of reflow soldering is $245 \pm 15^\circ\text{C}$

TECHNICAL SPECIFICATIONS AND TEST METHODS

Operating Environment:

TEMP. CHARACTERISTICS	TEMP. RANGE	RELATIVE HUMIDITY	ATMOSPHERIC PRESSURE
COG/X7R/X7S/X7T	-55°C ~ 125°C	≤95% (25°C)	86 KPa~106KPa
X6S	-55°C ~ 105°C	≤95% (25°C)	86 KPa~106KPa
X5R	-55°C ~ 85°C	≤95% (25°C)	86 KPa~106KPa

Reliability Test Specifications and Methods Part A:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

Item	Specification	Test Method
	Class1 (Temperature Compensating Type)- COG, Class 2 (High dielectric constant type)- X7R\X7T\X7S\X6S\X5R	
Appearance	No obvious defects on ceramic body and termination	Visual examination under a microscope.
Size Code	See Page 4	Measuring by gages which precision is not less than 0.01 mm .
Capacitance	Within the specified tolerance	Measurement Temperature: 18 ~ 28°C Relative Humidity: ≤RH 80% Measurement Frequency: Class 1: C≤1nF, f=1.0±0.1MHz ; C>1nF, f=1.0±0.1KHz Class 2: f=1.0±0.1KHz, 120±24Hz, Page 28~Page 71 Measurement Voltage: Class 1: 1.0±0.2Vrms; Class 2: U=1.0±0.2Vrms, 0.5±0.1Vrms,
Dissipation	Class 1: C≥30pF, Q≥1000, C < 30pF, Q≥400+20C, C: Nominal Capacitance (pF) Class 2: see Page 28~Page 71	see Page 28~Page 71 Post-treatment: When the capacitor initial capacitance is lower than its tolerance value, the test sample need to Perform a heat treatment at 150°C+0/-10°C for 1 hour and then set for 24±2 hours at room temp. then measure.

Reliability Test Specifications and Methods Part F:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

Item	Specification	Test Method
Insulation Resistance (I.R.)	Class1 (Temperature Compensating Type)- COG, Class 2 (High dielectric constant type)- X7R\X7T\X7S\X6S\X5R	Measurement Temperature: 18 ~ 28°C Relative Humidity: ≤RH 80% Measurement Voltage: Rated Voltage Charging Time: 1min Charge/discharge current: 50mA or lower. .
Voltage Proof	No defects or abnormalities.	Test Voltage: Class 1: ≥3×UR, Class 2: ≥2.5×UR Applied Time: t=1s~5s Charge/discharge current: 50mA or lower.
Temperature Characteristics of Capacitance	Class 1: COG: $\alpha \leq \pm 30 \text{ ppm}/^\circ\text{C}$ (125°C $-72 \leq \alpha \leq +30 \text{ ppm}/^\circ\text{C}$ (-55°C) Class 2: X7R/X5R: $\Delta C/C \leq \pm 15\%$. X7S/X6S: $\Delta C/C \leq \pm 22\%$; X7T: $-33\% \leq \Delta C/C \leq 22\%$	Pre-treatment: Class 2: Perform a heat treatment at 150°C+0/-10°C for 1 hour and then sit for 24±2 hours at room temperature. then measure. Pre-drying: Class 1: 16-24 hours Measure the capacitance separately in 25°C、 θ_1 、25°C、 θ_2 、25°C, should satisfied relative capacitance change characteristics COG\X7R\X7S\X7T: $\theta_1 = -55^\circ\text{C}$, $\theta_2 = 125^\circ\text{C}$ X6S: $\theta_1 = -55^\circ\text{C}$, $\theta_2 = 105^\circ\text{C}$ X5R: $\theta_1 = -55^\circ\text{C}$, $\theta_2 = 85^\circ\text{C}$ T.C Measurement Voltage: Class 1: 1.0±0.2Vrms Class 2: ≤1.0±0.2Vrms ※ 【※ Please contact our technical support staff for more



Reliability Test Specifications and Methods Part G:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

Item	Specification	Test Method
Resistance to Soldering Heat	<p>Class1 (Temperature Compensating Type)- COG,</p> <p>Class 2 (High dielectric constant type)- X7R\X7T\X7S\X6S\X5R</p>	<p>Pre-treatment:</p> <p>Class 2: Perform a heat treatment at 150°C+0/-10°C for 1 hour and then sit for 24±2 hours at room temperature. then measure.</p> <p>Test Method: Solder bath method</p> <p>Pre-heating: Temp. : 120°C~150°C/Time: 60s</p> <p>Solder alloy: Sn-3.0Ag-0.5Cu(Lead Free Solder)</p> <p>Solder temp.: (270±5)°C</p> <p>Duration of immersion: (10±1)s</p> <p>Depth of immersion: 10 mm</p> <p>Post-treatment: Set for 24±2 hours at room temperature, then measure.</p>
Solderability	<p>Appearance 95% of the terminations is to be Time:10s~30s soldered evenly and continuously</p>	<p>Pre-heating: 80°C~120°C,Time:10s~30s</p> <p>Test Method Solder bath method</p> <p>Flux Solution of rosin ethanol</p> <p>Solder alloy Sn-Ag-Cu(Lead Free Solder)</p> <p>Solder temp. (245±5)°C</p> <p>Duration of immersion (2.0±0.5)s</p> <p>Depth of immersion 10 mm</p>


Reliability Test Specifications and Methods Part D:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

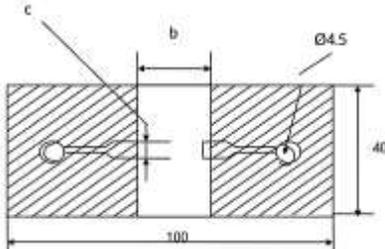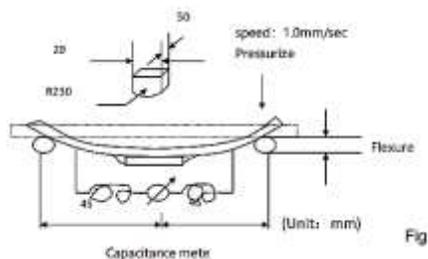Item	Specification	Test Method
Substrate Bending test	<p>Appearance: No defects or abnormalities,</p> <p>Cap. Change : Class 1: $\Delta C/C \leq \pm 5\%$ or $\pm 0.5\text{pF}$, (Whichever is larger)</p> <p>Class 2: See Page 28~Page 71</p>	<p>Mounting method: Solder the capacitor on the test substrate shown in Fig.2</p> <p>Pressurization Method: Shown in Fig.3</p> <p>Flexure: 1mm</p> <p>Holding Time: (5±1)s</p> <p>then measure the capacitance</p> <div style="text-align: center;">  <p>Fig 2</p> </div> <div style="text-align: center;">  <p>Fig 3</p> </div>

Reliability Test Specifications and Methods Part E:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

Item	Specification	Test Method
<p>Adhesive Strength of Termination</p>	<p>Class1 (Temperature Compensating Type)- COG, Class 2 (High dielectric constant type)- X7R\X7T\X7S\X6S\X5R</p> <p>Appearance: No defects or abnormalities</p>	<p>Mounting method Solder: the capacitor on the test substrate shown in Fig.4</p> <p>Apply a pushing force of F for 10±1secs.</p> <p>Pushing force: 0105:F=1N/0201:F=2N/0402:F=5N Class1: 0603/0805/1206/1210:F=10N Class2: 0603/0805/1206/1210:F=5N.</p> <div data-bbox="868 998 1165 1230" style="text-align: center;">  <p>The diagram shows a cross-section of a capacitor mounted on a substrate. A blue arrow labeled 'F' points to the right, indicating the direction of the pushing force applied to the capacitor.</p> </div> <p style="text-align: center;">Fig 4</p>
<p>Vibration</p>	<p>Appearance: No defects or abnormalities</p> <p>Cap. Change: Class1: initial specification Class 2: See Page 28~Page 71</p> <p>I.R. initial specification D.F. or Q: initial specification</p>	<p>Mounting method: Solder the capacitor on the test substrate</p> <p>Amplitude: 1.5mm</p> <p>Kind of Vibration: A simple harmonic motion</p> <p>Frequency: 10Hz-55Hz-10Hz</p> <p>Vibration Time: 1 min</p> <p>Repeat this for 2hrs each in 3 perpendicular directions X, Y, Z, total 6hrs</p>

Reliability Test Specifications and Methods Part F:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

Item	Specification	Test Method
Rapid change of temperature	Class1 (Temperature Compensating Type)- COG, Class 2 (High dielectric constant type)- X7R\X7T\X7S\X6S\X5R	Pre-treatment: Class 2: Perform a heat treatment at 150°C+0/-10°C for 1 hour and then sit for 24±2 hours at room temperature. then measure. Mounting method: Solder the capacitor on the test substrate The number of cycles: 100 cycles Temperature Step : Step 1: Temp.(°C) θ1, Time (min.) 30±3 Step 2: Temp.(°C) 25, Time (min.) 2~5 Step 3: Temp.(°C) θ2, Time (min.) 30±3 Step 4: Temp.(°C) 25, Time (min.) 2~5 COG\X7R\X7S\X7T: θ1=-55°C, θ2=125°C X6S: θ1=-55°C, θ2=105°C X5R: θ1=-55°C, θ2=85°C Post-treatment: Set for 24±2 hours at room temperature, then measure.
Damp Heat (Steady State)	Appearance: No defects or abnormalities Cap. Change: Class 1: ΔC/C≤±7.5% or 0.75pF, (Whichever is larger) Class 2: See Page 28~Page 71 I.R.: Class 1: ≥500MΩ or 25Ω, (Whichever is larger), Class 2: Page 28~Page 71 D.F. or Q: Class 1: C≥30pF, Q≥200 C < 30pF Q≥100+10C/3, C: Nominal Capacitance (pF) Class 2: See Page 28~Page 71	Pre-treatment: Class 2: Perform a heat treatment at 150°C+0/-10°C for 1 hour and then sit for 24±2 hours at room temperature. then measure. Mounting method: Solder the capacitor on the test substrate Test Temperature: 60±2°C Test Humidity: RH 90 ~ 95% Test Time 500±12h Post-treatment: set for 24±2 hours at room temperature, then measure.

Reliability Test Specifications and Methods Part G:

Without specific note, the “test method” in Table 5 is based on GB/T 21041/21042 IDT IEC60384 .

Item	Specification	Test Method
Endurance	Class1 (Temperature Compensating Type)- COG, Class 2 (High dielectric constant type)- X7R\X7T\X7S\X6S\X5R	Pre-treatment: Class 2: Perform a heat treatment at 150°C+0/-10°C for 1 hour and then sit for 24±2 hours at room temperature. then measure. Mounting method: Solder the capacitor on the test substrate Test Temperature: $\theta_2 \pm 3^\circ\text{C}$ [COG\X7R\X7S\X7T: $\theta_2 = 125^\circ\text{C}$, X6S: $\theta_2 = 105^\circ\text{C}$, X5R: $\theta_2 = 85^\circ\text{C}$] Test Time: 1000±12h Test Voltage: Class 1: 2×UR [0201COG:C≥270pF and UR=50V: 1.5×UR], Class 2: 1.5×UR Charge/discharge current: 50mA or lower Post-treatment: Class 1: Set for 24±2 hours at room temperature, then measure. Class 2: Perform a heat treatment at 150°C+0/-10°C for 1 hour and then sit for 24±2 hours at room temperature. then measure.
High Temperature High Humidity (Steady)	No defects or abnormalities Cap. Change: COG: $\Delta C/C \leq \pm 7.5\%$ or 0.75pF (Whichever is larger) X7R: $\Delta C/C \leq \pm 12.5\%$ X7T/X7S/X6S/X6T: $\Delta C/C \leq \pm 15\%$ I.R.: Class 1: $\geq 500\text{M}\Omega$ or 25Ω · F, (Whichever is smaller), X7T/X7S/X6S/X6T $\geq 500\text{M}\Omega$ or 25Ω · F COG: (C:pF) C≥30pF, Q≥200 C < 30pF, Q≥100+10C/3 X7T/X7S/X6S/X6T/X5S/X5T: 0.2max	High Dielectric Type: Pre-treatment Test Temperature: 40±2°C Test Humidity: RH 90 ~ 95% Test Voltage: 1.0×UR Test Time: 500h Charge/discharge current: 50mA or lower

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0402 - 50V

THICKNESS CODE		B (50V)	N (50V)	C (50V)
Capacitance		100pF~100nF	100nF	100nF
Electrical tests	D.F. [max.]	0.035	0.035	0.035
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	0.07	0.07	0.07
	I.R. [min.]	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	0.07	0.07	0.07
	I.R. [min.]	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.07	0.07	0.07
	I.R. [min.]	1000MΩ or 25Ω.F	1000MΩ or 25Ω.F	1000MΩ or 25Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0402 - 25V

THICKNESS CODE		B (25V)	N (25V)	C (25V)
Capacitance		100pF~100nF	22nF~330nF	82nF~220nF
Electrical tests	D.F. [max.]	0.035	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	0.07	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	0.07	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F	500MΩ or 12.5Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.07	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	1000MΩ or 25Ω.F	1000MΩ or 25Ω.F	1000MΩ or 25Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0402 - 16V

THICKNESS CODE		B (16V)	N (16V)	
Capacitance		1nF~220nF	22nF~470nF	
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1	
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F	
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	
Substrate Bending test	Cap. [ΔC/C±%]	10	10	
Vibration	Cap.[ΔC/C±%]	15	15	
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	
Damp heat (steady state)	Cap. [ΔC/C±%]	12.5	12.5	
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F	
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	12.5	12.5	
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F	
Endurance	Cap.[ΔC/C±%]	15	15	
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	
	I.R. [min.]	1000MΩ or 10Ω·F	1000MΩ or 10Ω·F	

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0402 - 10V & 6.3V

THICKNESS CODE		B (10V)	N (10V)	B (6.3V)
Capacitance		1nF~220nF	22nF~470nF	1nF~220nF
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	1000MΩ or 10Ω·F	1000MΩ or 10Ω·F	1000MΩ or 10Ω·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0402 – 6.3V

THICKNESS CODE		N (6.3V)	N (6.3V)	
Capacitance		22nF~470nF	1μF	
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	0.1	
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F	
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	
Vibration	Cap.[ΔC/C≤±%]	15	15	
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	
Damp heat (steady state)	Cap. [ΔC/C≤±%]	12.5	12.5	
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	:0.2	
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F	
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	12.5	12.5	
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	:0.2	
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 12.5Ω·F	
Endurance	Cap.[ΔC/C≤±%]	15	15	
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	
	I.R. [min.]	1000MΩ or 10Ω·F	1000MΩ or 10Ω·F	

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 - 50V

THICKNESS CODE		B (50V)	N (50V)	C (50V)
Capacitance		100pF~100nF	27nF~47nF	56nF~470nF
Electrical tests	D.F. [max.]	C≤47nF:0.035, C > 47nF:0.1	0.035	0.1
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C±%]	10	10	10
Vibration	Cap.[ΔC/C±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C±%]	15	15	15
	D.F. [max.]	C≤47nF:0.07, C > 47nF:0.2	0.07	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	C≤47nF:0.07, C > 47nF:0.2	0.07	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ 25Ω.F
Endurance	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	C≤47nF:0.07, C > 47nF:0.2	0.07	0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 - 35V & 25V

THICKNESS CODE		B (35V)	C (35V)	B (25V)
Capacitance		100pF~100nF	56nF~100nF	100pF~100nF
Electrical tests	D.F. [max.]	C≤47nF:0.035, C > 47nF:0.1	0.1	C≤47nF:0.035, C > 47nF:0.1
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C±%]	10	10	10
Vibration	Cap.[ΔC/C±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C±%]	15	15	15
	D.F. [max.]	C≤47nF:0.07, C > 47nF:0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	C≤47nF:0.07, C > 47nF:0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	C≤47nF:0.07, C > 47nF:0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 - 25V 7 16V

THICKNESS CODE		N (25V)	C (25V)	B (16V)
Capacitance		82nF~470nF	270nF~2.2μF	100pF~1μF
Electrical tests	D.F. [max.]	0.1	0.1	C≤47nF:0.035, C > 47nF:0.1
	I.R. [min.]	50Ω.F	50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 - 16V & 10V

THICKNESS CODE		N (16V)	N (16V)	B (10V)
Capacitance		120nF~470nF	2.2μF	100pF~1μF
Electrical tests	D.F. [max.]	0.1	0.1	C≤47nF:0.035, C > 47nF:0.1
	I.R. [min.]	50Ω.F	50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	5Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	5Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	C≤47nF:0.07, C > 47nF:0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 - 10V

THICKNESS CODE		B (10V)	N (10V)	N (10V)
Capacitance		2.2μF	120nF~470nF	2.2μF
Electrical tests	D.F. [max.]	0.1	0.1	0.125
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	5Ω.F	500MΩ or 25Ω.F	5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	5Ω.F	500MΩ or 25Ω.F	5Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 - 10V & 6.3V

THICKNESS CODE		C (10V)	B (6.3V)	B (6.3V)
Capacitance		4.7μF	100pF~820nF	1μF
Electrical tests	D.F. [max.]	0.1	C≤47nF:0.035, C > 47nF:0.1	0.1
	I.R. [min.]	50Ω.F	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	C≤47nF:0.07, C > 47nF:0.2	0.2
	I.R. [min.]	5Ω.F	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	C≤47nF:0.07, C > 47nF:0.2	0.2
	I.R. [min.]	5Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	C≤47nF:0.07, C > 47nF:0.2	0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 – 6.3V

THICKNESS CODE		B (6.3V)	B (6.3V)	B (6.3V)
Capacitance		2.2μF	270nF~4.7μF	4.7μF
Electrical tests	D.F. [max.]	0.1	0.1	0.15
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	25	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	5Ω.F	500MΩ or 25Ω.F	5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	25	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	5Ω.F	500MΩ or 25Ω.F	5Ω.F
Endurance	Cap.[ΔC/C≤±%]	25	15	25
	D.F. [max.]	0.2	0.2	0.3
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 – 6.3V & 4V

THICKNESS CODE		B (6.3V)	U (6.3V)	C (4V)
Capacitance		10 μ F	10 μ F	10 μ F
Electrical tests	D.F. [max.]	0.15	0.15	0.15
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	10	10	10
Vibration	Cap. [Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.25	0.25	0.2
	I.R. [min.]	500M Ω or 3.5 Ω ·F	500M Ω or 3.5 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.25	0.25	0.2
	I.R. [min.]	500M Ω or 3.5 Ω ·F	500M Ω or 3.5 Ω ·F	500M Ω or 25 Ω ·F
Endurance	Cap. [Δ C/C \leq \pm %]	15	15	25
	D.F. [max.]	0.25	0.25	0.2
	I.R. [min.]	1000M Ω or 7 Ω ·F	1000M Ω or 7 Ω ·F	1000M Ω or 10 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0402 – 4V

THICKNESS CODE (VOLTAGE)		C (4V)		
Capacitance		22μF		
Electrical tests	D.F. [max.]	0.15		
	I.R. [min.]	50Ω·F		
	Measurement Frequency	120±24KHz		
	Measurement Voltage [Vrms]	0.5.0±0.1		
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15		
Substrate Bending test	Cap. [ΔC/C≤±%]	10		
Vibration	Cap.[ΔC/C≤±%]	15		
Rapid change of temperature	Cap. [ΔC/C≤±%]	15		
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15		
	D.F. [max.]	0.2		
	I.R. [min.]	500MΩ or 25Ω·F		
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15		
	D.F. [max.]	0.2		
	I.R. [min.]	500MΩ or 25Ω·F		
Endurance	Cap.[ΔC/C≤±%]	15		
	D.F. [max.]	0.2		
	I.R. [min.]	1000MΩ or 10Ω·F		

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7S, 0402 – 10V & 6.3V

THICKNESS CODE (VOLTAGE)		C (10V)	C (6.3V)	
Capacitance		1μF	1μF	
Electrical tests	D.F. [max.]	0.1	0.125	
	I.R. [min.]	50Ω.F	50Ω.F	
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	
Vibration	Cap.[ΔC/C≤±%]	15	15	
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	
	D.F. [max.]	0.2	0.25	
	I.R. [min.]	500MΩ or 10Ω.F	500MΩ or 12.5Ω.F	
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	
	D.F. [max.]	0.2	0.25	
	I.R. [min.]	500MΩ or 10Ω.F	500MΩ or 12.5Ω.F	
Endurance	Cap.[ΔC/C≤±%]	15	15	
	D.F. [max.]	0.2	0.25	
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7T, 0402 – 10V & 6.3V

THICKNESS CODE (VOLTAGE)		B (10V)	C (10V)	B (6.3V)
Capacitance		1 μ F	2.2 μ F	1 μ F
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap. [Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	20	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	25 Ω ·F	500M Ω or 5 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap. [Δ C/C \leq \pm %]	20	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	25 Ω ·F	500M Ω or 5 Ω ·F	500M Ω or 25 Ω ·F
Endurance	Cap. [Δ C/C \leq \pm %]	15	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	50 Ω ·F	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7T, 0402 – 6.3V & 4V

THICKNESS CODE (VOLTAGE)		N (6.3V)	C (6.3V)	N (4V)
Capacitance		1 μ F	2.2 μ F	1 μ F
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap. [Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 25 Ω ·F	1000M Ω or 25 Ω ·F	1000M Ω or 25 Ω ·F
Endurance	Cap. [Δ C/C \leq \pm %]	15	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 – 50V & 25V

THICKNESS CODE (VOLTAGE)		B (50V)	C (50V)	B (25V)
Capacitance		15nF~47nF	100nF	68nF~100nF
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 – 25V & 16V

THICKNESS CODE (VOLTAGE)		C (25V)	N (25V)	B (16V)
Capacitance		220nF~1.0μF	220nF~470nF	100nF~1μF
Electrical tests	D.F. [max.]	0.1	0.1	0.125
	I.R. [min.]	50Ω·F	50Ω·F	50Ω·F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	25	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	50Ω·F	50Ω·F	500MΩ or 25Ω·F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	25	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	50Ω·F	50Ω·F	500MΩ or 25Ω·F
Endurance	Cap.[ΔC/C≤±%]	25	25	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	10Ω·F	10Ω·F	1000MΩ or 10Ω·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 – 16V

THICKNESS CODE (VOLTAGE)		N (16V)	C (16V)	C (16V)
Capacitance		220nF~470nF	220nF	1μF
Electrical tests	D.F. [max.]	0.125	0.125	0.125
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	20
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	12.5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	20
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	12.5Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	25Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 – 16V & 10V

THICKNESS CODE (VOLTAGE)		C (16V)	B (10V)	N (10V)
Capacitance		2.2 μ F	1 μ F	220nF~470nF
Electrical tests	D.F. [max.]	0.125	0.125	0.125
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap. [Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
Endurance	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 – 10V & 6.3V

THICKNESS CODE (VOLTAGE)		N (10V)	C (10V)	B (6.3V)
Capacitance		4.7 μ F	2.2 μ F	1 μ F
Electrical tests	D.F. [max.]	0.15	0.125	0.125
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap. [Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
Endurance	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 –6.3V

THICKNESS CODE (VOLTAGE)		N (6.3V)	N (6.3V)	C (6.3V)
Capacitance		220nF~470nF	2.2μF	1μF~4.7μF
Electrical tests	D.F. [max.]	0.15	0.125	0.125
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0402 -4V

THICKNESS CODE (VOLTAGE)		B (4V)	C (4V)	
Capacitance		1μF~2.2μF	10μF	
Electrical tests	D.F. [max.]	0.15	0.1	
	I.R. [min.]	50Ω.F	50Ω.F	
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	
Vibration	Cap.[ΔC/C≤±%]	15	15	
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	25	
	D.F. [max.]	0.2	0.2	
	I.R. [min.]	500MΩ or 25Ω.F	5Ω.F	
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	25	
	D.F. [max.]	0.2	0.2	
	I.R. [min.]	500MΩ or 25Ω.F	5Ω.F	
Endurance	Cap.[ΔC/C≤±%]	15	25	
	D.F. [max.]	0.2	0.2	
	I.R. [min.]	1000MΩ or 10Ω.F	10Ω.F	

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0603 - 50V & 25V

THICKNESS CODE		D (50V)	K (50V)	D (25V)
Capacitance		220pF~820nF	47nF~470nF	100nF~820nF
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C±%]	10	10	10
Vibration	Cap.[ΔC/C±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0603 - 25V & 16V

THICKNESS CODE		D (25V)	K (25V)	D (16V)
Capacitance		1 μ F	100nF~1 μ F	1nF~1 μ F
Electrical tests	D.F. [max.]	0.1	0.1	C \leq 100nF:0.035, C > 100nF:0.1
	I.R. [min.]	100 Ω .F	100 Ω .F	100 Ω .F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	10	10	10
Vibration	Cap.[Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
	D.F. [max.]	0.2	0.2	C \leq 100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500M Ω or 25 Ω .F	500M Ω or 25 Ω .F	500M Ω or 25 Ω .F
High Temperature High Humidity (Steady)	Cap.[Δ C/C \leq \pm %]	12.5	12.5	12.5
	D.F. [max.]	0.2	0.2	C \leq 100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500M Ω or 25 Ω .F	500M Ω or 25 Ω .F	500M Ω or 25 Ω .F
Endurance	Cap.[Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	C \leq 100nF:0.07, C > 100nF:0.2
	I.R. [min.]	1000M Ω or 50 Ω .F	1000M Ω or 50 Ω .F	1000M Ω or 10 Ω .F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0603 - 16V & 10V

THICKNESS CODE		K (16V)	D (10V)	D (10V)
Capacitance		100nF~1μF	100nF~820nF	2.2μF
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	C≤100nF:0.035, C > 100nF:0.1	0.1
	I.R. [min.]	100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C±%]	10	10	10
Vibration	Cap.[ΔC/C±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	5Ω.F
Endurance	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	C≤100nF:0.07, C > 100nF:0.2	0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0603 - 10V & 6.3V

THICKNESS CODE		K (10V)	K (10V)	D (6.3V)
Capacitance		100nF~1μF	2.2μF	100nF~820nF
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	0.1	C≤100nF:0.035, C > 100nF:0.1
	I.R. [min.]	100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C±%]	10	10	10
Vibration	Cap.[ΔC/C±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C±%]	15	12.5	15
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	C≤100nF:0.07, C > 100nF:0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 25Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7R, 0603 - 6.3V

THICKNESS CODE		K (6.3V)	K (6.3V)	K (6.3V)
Capacitance		100nF~1μF	2.2μF	4.7μF
Electrical tests	D.F. [max.]	C≤100nF:0.035, C > 100nF:0.1	0.1	0.1
	I.R. [min.]	100Ω·F	100Ω·F	100Ω·F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω·F	5Ω·F	5Ω·F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	25	15
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω·F	5Ω·F	5Ω·F
Endurance	Cap.[ΔC/C≤±%]	15	25	15
	D.F. [max.]	C≤100nF:0.07, C > 100nF:0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 50Ω·F	10Ω·F	1000MΩ or 10Ω·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 - 50V

THICKNESS CODE		D (50V)	D (50V)	K (50V)
Capacitance		220pF~820nF	1μF	2.2μF
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	C≤25nF:10000MΩ, C>25nF:50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C±%]	10	10	10
Vibration	Cap.[ΔC/C±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C±%]	12.5	12.5	12.5
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 25Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 - 35V & 25V

THICKNESS CODE		D (35V)	S (25V)	D (25V)
Capacitance		680nF~820nF	680nF~820nF	100nF~820nF
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [$\Delta C/C \leq \pm\%$]	15	15	15
Substrate Bending test	Cap. [$\Delta C/C \leq \pm\%$]	10	10	10
Vibration	Cap. [$\Delta C/C \leq \pm\%$]	15	15	15
Rapid change of temperature	Cap. [$\Delta C/C \leq \pm\%$]	15	15	15
Damp heat (steady state)	Cap. [$\Delta C/C \leq \pm\%$]	12.5	12.5	12.5
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap. [$\Delta C/C \leq \pm\%$]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap. [$\Delta C/C \leq \pm\%$]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F	1000MΩ or 50Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 - 25V

THICKNESS CODE		D (25V)	D (25V)	K (25V)
Capacitance		1 μ F	2.2 μ F	1 μ F~10 μ F
Electrical tests	D.F. [max.]	0.1	0.1	0.15
	I.R. [min.]	100 Ω .F	50 Ω .F	50 Ω .F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	10	10	10
Vibration	Cap.[Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	12.5	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 12.5 Ω ·F	12.5 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap.[Δ C/C \leq \pm %]	15	12.5	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 12.5 Ω ·F	12.5 Ω ·F	500M Ω or 25 Ω ·F
Endurance	Cap.[Δ C/C \leq \pm %]	15	12.5	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 25 Ω ·F	25 Ω ·F	1000M Ω or 50 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 - 16V

THICKNESS CODE		S (16V)	D (16V)	K (16V)
Capacitance		680nF~820nF	220nF~2.2μF	4.7μF~10μF
Electrical tests	D.F. [max.]	0.125	0.1	0.125
	I.R. [min.]	100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 - 10V

THICKNESS CODE		S (10V)	D (10V)	K (10V)
Capacitance		4.7μF	680nF~4.7μF	5.6μF~10μF
Electrical tests	D.F. [max.]	0.15	0.15	0.15
	I.R. [min.]	100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	30	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	2Ω·F	500MΩ or 25Ω·F	500MΩ or 25Ω·F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	30	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	2Ω·F	500MΩ or 25Ω·F	500MΩ or 25Ω·F
Endurance	Cap.[ΔC/C≤±%]	30	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	2Ω·F	1000MΩ or 10Ω·F	1000MΩ or 10Ω·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 - 10V & 6.3V

THICKNESS CODE		K (10V)	D (6.3V)	K (6.3V)
Capacitance		22μF	1μF~10μF	8.2μF~10μF
Electrical tests	D.F. [max.]	0.15	0.15	0.15
	I.R. [min.]	100Ω.F	100Ω.F	100Ω.F
	Measurement Frequency	120±24Hz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	0.5±0.1	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	10	10	10
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 25Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 – 6.3V & 4V

THICKNESS CODE		K (10V)	K (4V)	K (4V)
Capacitance		22 μ F	10 μ F	22 μ F
Electrical tests	D.F. [max.]	0.15	0.15	0.15
	I.R. [min.]	100 Ω .F	100 Ω .F	100 Ω .F
	Measurement Frequency	120 \pm 24Hz	1.0 \pm 0.1KHz	120 \pm 24Hz
	Measurement Voltage [Vrms]	0.5 \pm 0.1	1.0 \pm 0.2	0.5 \pm 0.1
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	10	10	10
Vibration	Cap.[Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 8.8 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
High Temperature High Humidity (Steady)	Cap.[Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 8.8 Ω ·F	500M Ω or 25 Ω ·F	500M Ω or 25 Ω ·F
Endurance	Cap.[Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 17.7 Ω ·F	1000M Ω or 10 Ω ·F	1000M Ω or 10 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X5R, 0603 – 4V

THICKNESS CODE		K (4V)		
Capacitance		47μF		
Electrical tests	D.F. [max.]	0.15		
	I.R. [min.]	100Ω.F		
	Measurement Frequency	120±24Hz		
	Measurement Voltage [Vrms]	0.5±0.1		
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15		
Substrate Bending test	Cap. [ΔC/C≤±%]	10		
Vibration	Cap.[ΔC/C≤±%]	15		
Rapid change of temperature	Cap. [ΔC/C≤±%]	15		
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15		
	D.F. [max.]	0.2		
	I.R. [min.]	500MΩ or 25Ω.F		
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15		
	D.F. [max.]	0.2		
	I.R. [min.]	500MΩ or 25Ω.F		
Endurance	Cap.[ΔC/C≤±%]	15		
	D.F. [max.]	0.2		
	I.R. [min.]	1000MΩ or 10Ω.F		

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7S, 0603 – 25V & 16V

THICKNESS CODE		K (25V)	K (16V)	K (16V)
Capacitance		1 μ F~2.2 μ F	1 μ F	2.2 μ F
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	50 Ω .F	50 Ω .F	50 Ω .F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap.[Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 12.5 Ω .F	500M Ω or 12.5 Ω .F	500M Ω or 12.5 Ω .F
High Temperature High Humidity (Steady)	Cap.[Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 12.5 Ω .F	500M Ω or 12.5 Ω .F	500M Ω or 12.5 Ω .F
Endurance	Cap.[Δ C/C \leq \pm %]	15	15	15
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 25 Ω .F	1000M Ω or 25 Ω .F	1000M Ω or 25 Ω .F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7S, 0603 – 16V, 10V & 6.3V

THICKNESS CODE		K (25V)	K (10V)	K (6.3V)
Capacitance		4.7 μ F	4.7 μ F	4.7 μ F
Electrical tests	D.F. [max.]	0.1	0.125	0.1
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap.[Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 12.5 Ω ·F	500M Ω or 12.5 Ω ·F	500M Ω or 12.5 Ω ·F
High Temperature High Humidity (Steady)	Cap.[Δ C/C \leq \pm %]	12.5	12.5	12.5
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500M Ω or 12.5 Ω ·F	500M Ω or 12.5 Ω ·F	500M Ω or 12.5 Ω ·F
Endurance	Cap.[Δ C/C \leq \pm %]	15	15	12.5
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000M Ω or 25 Ω ·F	1000M Ω or 25 Ω ·F	1000M Ω or 25 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X7T, 0603 – 10V & 6.3V

THICKNESS CODE		K (10V)	K (6.3V)	
Capacitance		2.2μF~10μF	10μF	
Electrical tests	D.F. [max.]	0.1	0.1	
	I.R. [min.]	50Ω·F	50Ω·F	
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	
Vibration	Cap.[ΔC/C≤±%]	15	15	
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	
Damp heat (steady state)	Cap. [ΔC/C≤±%]	25	25	
	D.F. [max.]	0.2	0.2	
	I.R. [min.]	5Ω·F	5Ω·F	
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	25	25	
	D.F. [max.]	0.2	0.2	
	I.R. [min.]	5Ω·F	5Ω·F	
Endurance	Cap.[ΔC/C≤±%]	25	25	
	D.F. [max.]	0.2	0.2	
	I.R. [min.]	10Ω·F	10Ω·F	

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0603 – 25V & 16V

THICKNESS CODE		K (25V)	K (25V)	D (16V)
Capacitance		2.2 μ F	4.7 μ F	1 μ F
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	50 Ω ·F	50 Ω ·F	50 Ω ·F
	Measurement Frequency	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz	1.0 \pm 0.1KHz
	Measurement Voltage [Vrms]	1.0 \pm 0.2	1.0 \pm 0.2	1.0 \pm 0.2
Resistance to soldering heat	Cap. [Δ C/C \leq \pm %]	15	15	15
Substrate Bending test	Cap. [Δ C/C \leq \pm %]	12.5	12.5	12.5
Vibration	Cap.[Δ C/C \leq \pm %]	15	15	15
Rapid change of temperature	Cap. [Δ C/C \leq \pm %]	15	15	15
Damp heat (steady state)	Cap. [Δ C/C \leq \pm %]	15	15	30
	D.F. [max.]	0.2	0.2	0.125
	I.R. [min.]	500M Ω or 25 Ω ·F	12.5 Ω ·F	12.5 Ω ·F
High Temperature High Humidity (Steady)	Cap.[Δ C/C \leq \pm %]	15	15	30
	D.F. [max.]	0.2	0.2	0.125
	I.R. [min.]	500M Ω or 25 Ω ·F	12.5 Ω ·F	12.5 Ω ·F
Endurance	Cap.[Δ C/C \leq \pm %]	15	15	20
	D.F. [max.]	0.2	0.2	0.125
	I.R. [min.]	1000M Ω or 50 Ω ·F	25 Ω ·F	25 Ω ·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0603 – 16V, 10V & 6.3V

THICKNESS CODE		K (16V)	K (10V)	D (6.3V)
Capacitance		2.2μF~10μF	10μF	4.7μF
Electrical tests	D.F. [max.]	0.1	0.125	0.1
	I.R. [min.]	50Ω.F	50Ω.F	100Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	1.0±0.1KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	1.0±0.2
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F	5Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 12.5Ω.F	5Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 50Ω.F	1000MΩ or 10Ω.F	10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0603 – 6.3V

THICKNESS CODE		K (6.3V)	K (6.3V)	W (6.3V)
Capacitance		4.7μF	10μF	22μF
Electrical tests	D.F. [max.]	0.1	0.15	0.1
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	1.0±0.1KHz	120±24KHz
	Measurement Voltage [Vrms]	1.0±0.2	1.0±0.2	0.5±0.1
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 25Ω·F	5Ω·F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	500MΩ or 12.5Ω·F	500MΩ or 25Ω·F	5Ω·F
Endurance	Cap.[ΔC/C≤±%]	15	15	25
	D.F. [max.]	0.2	0.2	0.2
	I.R. [min.]	1000MΩ or 25Ω·F	1000MΩ or 10Ω·F	10Ω·F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0603 – 4V

THICKNESS CODE		K (4V)	K (4V)	W (4V)
Capacitance		10μF	22μF	22μF
Electrical tests	D.F. [max.]	0.1	0.1	0.1
	I.R. [min.]	50Ω.F	50Ω.F	50Ω.F
	Measurement Frequency	1.0±0.1KHz	120±24KHz	120±24KHz
	Measurement Voltage [Vrms]	1.0±0.2	0.5±0.1	0.5±0.1
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15	15	15
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5	12.5	12.5
Vibration	Cap.[ΔC/C≤±%]	15	15	15
Rapid change of temperature	Cap. [ΔC/C≤±%]	15	15	15
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.25
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 8.8Ω.F
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.25
	I.R. [min.]	500MΩ or 25Ω.F	500MΩ or 25Ω.F	500MΩ or 8.8Ω.F
Endurance	Cap.[ΔC/C≤±%]	15	15	15
	D.F. [max.]	0.2	0.2	0.25
	I.R. [min.]	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F	1000MΩ or 10Ω.F

CAP. \ D.F \ I.R. CHANGES AFTER TEST X6S, 0603 – 2.5V


THICKNESS CODE		K (2.5V)		
Capacitance		47μF		
Electrical tests	D.F. [max.]	0.1		
	I.R. [min.]	50Ω.F		
	Measurement Frequency	120±24KHz		
	Measurement Voltage [Vrms]	0.5±0.1		
Resistance to soldering heat	Cap. [ΔC/C≤±%]	15		
Substrate Bending test	Cap. [ΔC/C≤±%]	12.5		
Vibration	Cap.[ΔC/C≤±%]	15		
Rapid change of temperature	Cap. [ΔC/C≤±%]	15		
Damp heat (steady state)	Cap. [ΔC/C≤±%]	15		
	D.F. [max.]	0.25		
	I.R. [min.]	500MΩ or 10Ω.F		
High Temperature High Humidity (Steady)	Cap.[ΔC/C≤±%]	15		
	D.F. [max.]	0.25		
	I.R. [min.]	500MΩ or 1Ω.F		
Endurance	Cap.[ΔC/C≤±%]	15		
	D.F. [max.]	0.25		
	I.R. [min.]	1000MΩ or 1Ω.F		

PACKAGING STYLE AND QUANTITY PER REEL


SIZE CODE	METRIC CODE	THICKNESS CODE	SQUARE HOLE SPACING	DISC SIZE	CARRIER TAPE	QTY (KPCS)	PACKAGING CODE
0402	1005	B	2.0mm	7 #	Paper	10	T
0402	1005	N	2.0mm	7 #	Paper	10	T
0402	1005	C	2.0mm	7 #	Paper	10	T
0402	1005	U	2.0mm	7 #	Paper	8	C
0402	1005	U	2.0mm	7 #	Paper	10	T
0603	1608	S	4.0mm	7 #	Paper	4	T
0603	1608	D	4.0mm	7 #	Paper	4	T
0603	1608	D	4.0mm	7 #	Paper	3	W
0603	1608	K	4.0mm	7 #	Paper	4	T
0603	1608	K	4.0mm	7 #	Paper	3	W
0603	1608	K	4.0mm	7 #	Plastic	4	Q
0603	1608	K	4.0mm	7 #	Plastic	3	R
0603	1608	W	4.0mm	7 #	Plastic	3	R
0603	1608	W	4.0mm	7 #	Plastic	4	Q

PERFORMANCE OF CARRIER TAPING

- Strength of Carrier Tape and Top Cover Tape
- Carrier Tape: When a tensile force 1.02kgf is applied in the direction to unreel the tape, the tape shall withstand this force.
- Top cover Tape: When a tensile force 1.02kgf is applied to the tape, the tape shall withstand this force.
- Peeling Strength of Top Cover Tape: Unless otherwise specified, the peeling strength of top cover tape shall be within 10.2 to 71.4 gf when the top cover tape is pulled at a speed of 300mm/min with the angle of 0 to 15°

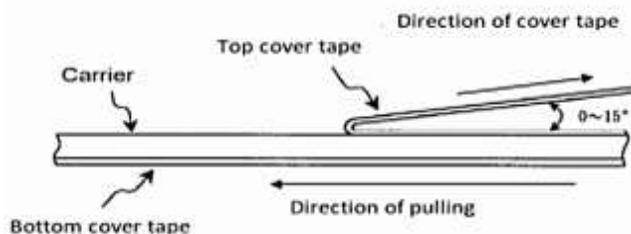


TAPE DIMENSION (Unit: mm), Paper Tape Type

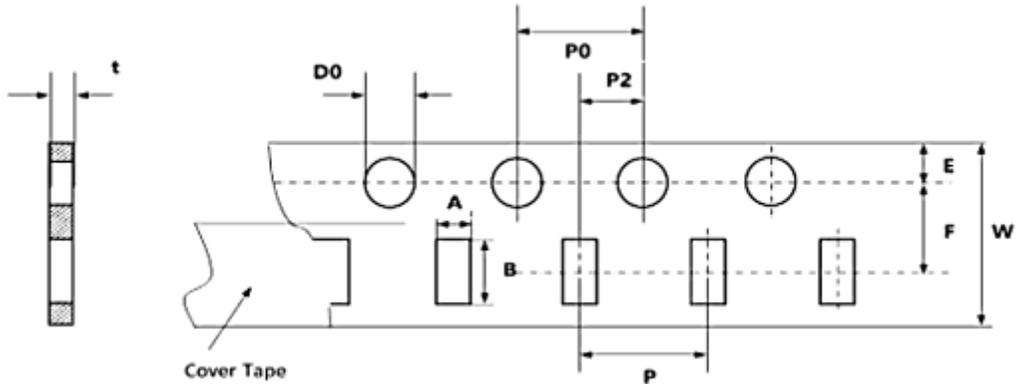


SIZE CODE		0402 (2MM PITCH)				0603		
Package Code		T, J	T, J	T, J	C, T	T, A, W	T, A, W	T
Thickness Code		B	C	N	U	D	K	S
Symbol	A	0.63±0.05	0.70±0.10	0.75±0.10	0.85±0.10	1.00±0.10	1.10±0.10	1.10±0.10
	B	1.13±0.05	1.20±0.10	1.30±0.10	1.40±0.10	1.80±0.10	1.90±0.10	1.90±0.10
	F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05
	P	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10
	E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
	D0	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05
	P2	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
	K	/	/	/	/	/	/	/
	W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.20	8.00±0.20	8.00±0.20
	P0	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
t	0.8max	0.8max	0.8max	0.95max	1.15max	1.15max	0.70max	

TAPE DIMENSION (Unit: mm), Plastic Tape Type

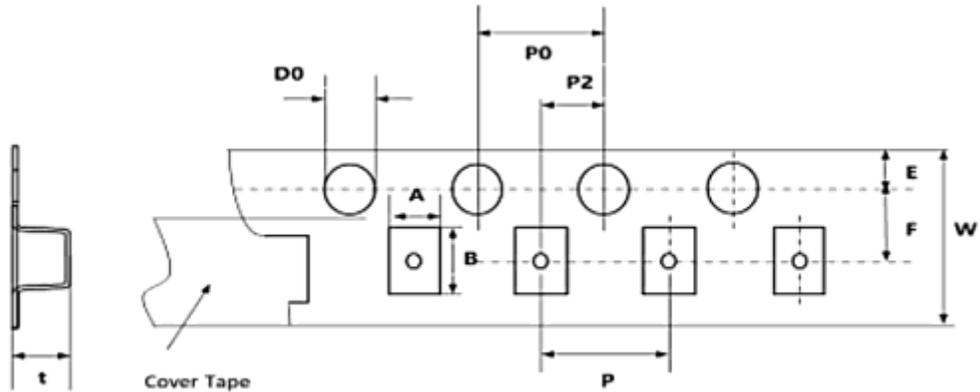


SIZE CODE		0603		
Package Code		O	O, Q, R	O, Q, R
Thickness Code		D	K	W
Symbol	A	1.00±0.10	1.10±0.10	1.10±0.10
	B	1.80±0.10	1.90±0.10	1.90±0.10
	F	3.50±0.05	3.50±0.05	3.50±0.05
	P	4.00±0.10	4.00±0.10	4.00±0.10
	E	1.75±0.10	1.75±0.10	1.75±0.10
	D0	1.55±0.05	1.55±0.05	1.55±0.05
	P2	2.00±0.05	2.00±0.05	2.00±0.05
	K	/	/	/
	W	8.00±0.20	8.00±0.20	8.00±0.20
	P0	4.00±0.10	4.00±0.10	4.00±0.10
	t	1.15max	1.15max	1.35max

REEL DIMENSION (Unit: mm)

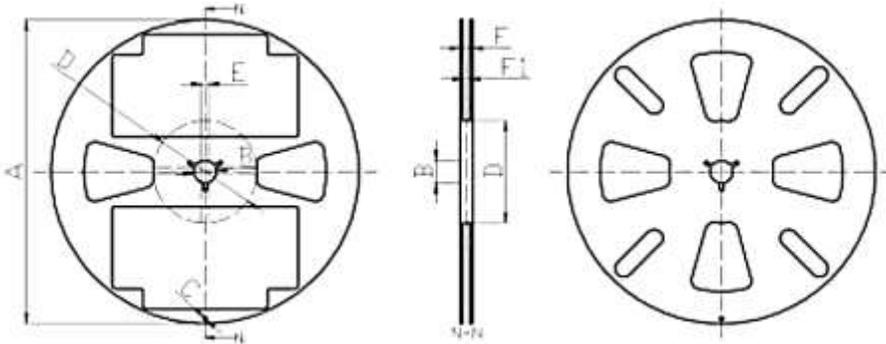

SIZE CODE	0402, 0603
Reel Size	7"
Width of carrier	8.00±0.10
A	Φ178±2.0
B	Φ13±1.0
C	Φ4.0±0.5
D	Φ60±2.0
E	4.0±1.0
F	11.5±1.0
F1	10.0±2

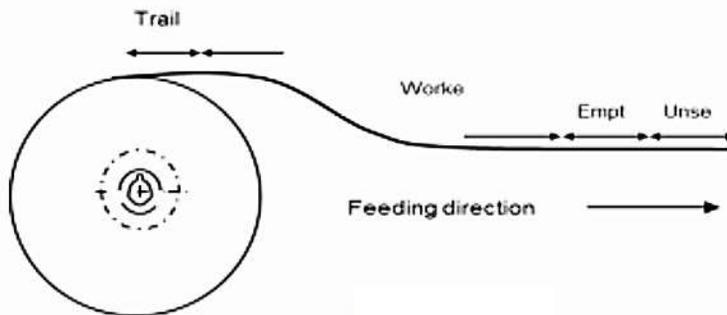

PACKAGING	THE MINIMUM LENGTH OF THE RESERVED SPACES		
	Trailer	Empty	Unseal
Carrier	60	200	160

IMPORTANT NOTES AND DISCLAIMER

1. **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does *NextGen* assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.