


|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                   |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| SPECIFICATION SHEET NO.          | T0115- CA55D025M476TA                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                   |
| ORIGINAL MFG/PART NO             | XiangJiang/CA55-D-25V47/CA55-D025M476T/CA55-D025M476TE200                                                                                                                                                                                                                                                                                                                                                                                       |                                                   |
| NEXTGEN PART CODE                | CA55D025M476TA                                                                                                                                                                                                                                                                                                                                                                                                                                  | Indicate This Code For <a href="#">RFQ</a> /Order |
| DATE                             | Jan. 15, 2026                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                   |
| REVISION                         | A2                                                                                                                                                                                                                                                                                                                                                                                                                                              | Updated With Most Recent Data                     |
| DESCRIPTION AND MAIN PARAMETRICS | <p>SMD Standard Tantalum Capacitors Industrial Grade MnO<sub>2</sub>, CA55 Series</p> <p>EIA code 7343-28 (2917), Case D, L7.30*W4.30*H2.80mm</p> <p>Rated voltage 25 Vdc, Capacitance 47μF, Tolerance <math>\pm 20\%</math>, ESR 200mΩ Max. Operating Temp. Range -55°C ~+125°C</p> <p>Package in Tape/Reel, 500pcs/Reel</p> <p>RoHS/RoHS III compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863) and Halogen Free (HF)</p> |                                                   |
| CUSTOMER                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                   |
| CUSTOMER PART NUMBER             |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                   |
| CROSS REF. PART NUMBER           | T520/T525/T530/T55/TCJ/TCM/TCN                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                   |
| MEMO                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                   |

|                               |                                                                                     |                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| VENDOR APPROVE                |                                                                                     |                                                                                       |
| Issued/Checked/Approved       |  |   |
|                               |                                                                                     |  |
| Effective Date: Jan. 15, 2026 |                                                                                     |                                                                                       |

|                  |
|------------------|
| CUSTOMER APPROVE |
|                  |
| DATE:            |

## MAIN FEATURE

- Tantalum Anode Electrolytic Capacitor With Gelled Conductive Polymer As Electrolyte
- Easy Resin Molded Packing SMD Polarity
- J-type Pin Structure
- Low ESR And ESL With Good High-frequency Capacity Retention
- Failure Mode Of Non-Combustion And Non-Explosion.
- Equipped With Strong Surge Resistance, It Can Reduce The Rating By 10-20%  
In Low Circuit Impedance Switching Power Supply Circuits To.
- Wide Operating Temperature Range -55 ~ +125°C
- Cross Most Competitors Parts T520/T525/T530/T55/TCJ/TCM/TCN and more
- Moisture Sensitivity Level (MSL) 1 (Unlimited)
- RoHS/RoHS III compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863)  
and Halogen Free (HF)



*Image shown is a representation only.  
Exact specifications should be  
obtained from the product dimension.*



## MAIN APPLICATION

- DC/DC Converters, Audio Circuits, Power Inputs
- Portable Electronic Products
- Telecommunications Consumer Electronics
- High-voltage Applications, Highly Integrated Microcircuit Modules
- Microprocessor Decoupling And High Ripple Current Applications

## ELECTRICAL CHARACTERISTICS

- See Page 24 ~ Page 25 for Different Part Code
- All Products Parameters are Subject To NextGen Components' Final Confirmation.

## HOW TO ORDER



- Please Follow Up Part Code Guide And Indicate NextGen Part Code CA55D025M476TA For RFQ and Order.

PART CODE GUIDE

**RFQ**  
[Request For Quotation](#)



| CODE | NAME                          | KEY SPECIFICATION OPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CA55 | Product Series                | SMD Conductive Polymer Tantalum Capacitors Industrial Grade                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| D    | Case Size Code                | A: 3216-16 (1206), L3.2*W1.6*H1.6mm; B: 3528-19 (1210), L3.5*W2.8*H1.9mm;<br>B1:3528-12 (1210), L3.5*W2.8*H1.2mm; C: 6032-25 (2312),L6.0*W3.2*H2.5mm;<br>D: 7343-28 (2917), L7.3*W4.3*H2.8mm; E: 7343-43 (2917), L7.3*W4.3*H4.3mm;<br>F: 7361-19 (2924), L7.3*W6.1*H1.9mm; G: 8R7R-4R (3330), L8.5*W7.5*H4.5mm;<br>H: 7343-21 (2917), L7.3*W4.3*H2.1mm; H1: 7343-15(2917),L7.3*W4.3*H1.5mm<br>L: 7343-19 (2917), L7.3*W4.3*H1.9mm; S: 1190-4R (4335), L11*W9.0*H4.5mm;<br>T: 1112R-55 (4349), L11*W12.5*H5.5mm; X:7360-60 (2924),L7.3*W6.0*H6.0mm;<br>V: 7361-36 (2924), L7.3*W6.1*H3.6mm;W: 7361-41 (2924), L7.3*W6.1*H4.1mm; |
| 025  | Rated voltage<br>Code         | 004: 4V; 6R3: 6.3V; 010: 10V; 016: 16V; 020: 20V; 025: 25V; 035: 35V; 050: 50V<br>063: 60V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| M    | Capacitance<br>Tolerance code | K: ±10% ; M: ±20% (Standard)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 476  | Capacitance Code              | 1st two digits represent Significant figures, 3rd Digit specifies number of Zeros<br>474: 0.47µF; 684:0.68µF; 105: 1.0µF; 155: 1.5µF; 225: 2.2µF; 335: 3.3µF;<br>475: 4.7µF; 685: 6.8µF; 106: 10µF; 156: 15µF; 226: 22µF; 336: 33µF;<br>476: 47µF; 686: 68µF; 107: 100µF; 157: 150µF; 227: 220µF; 337: 330µF;<br>477: 470µF; 687: 680µF; 108: 1000µF; 158: 1500µF; 228: 2200µF                                                                                                                                                                                                                                                 |
| TA   | Internal Control<br>Code      | Letter A~Z, a~z Or Digits (0-9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| XX   | Special/<br>Custom Parameters | Blank: N/A;<br>XX: Letter A~Z, a~z or digits (0~9) for Special/Custom Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

DIMENSIONS -- Unit: mm



| Case Size Code | EIA Code | EIA Metric | L         | W1        | H         | S         | W <sub>2</sub> |
|----------------|----------|------------|-----------|-----------|-----------|-----------|----------------|
| A              | 1206     | 3216-16    | 3.20±0.20 | 1.60±0.20 | 1.60±0.30 | 0.70±0.20 | 1.20±0.20      |
| B1             | 1210     | 3528-12    | 3.50±0.20 | 2.80±0.20 | 1.20±0.20 | 0.70±0.20 | 2.20±0.20      |
| B              | 1210     | 3528-19    | 3.50±0.20 | 2.80±0.20 | 1.90±0.30 | 0.70±0.20 | 2.20±0.20      |
| C              | 2312     | 6032-25    | 6.00±0.30 | 3.20±0.30 | 2.50±0.30 | 1.30±0.30 | 2.20±0.20      |
| H1             | 2917     | 7343-15    | 7.30±0.30 | 4.30±0.30 | 1.50±0.30 | 1.30±0.30 | 2.40±0.20      |
| L              | 2917     | 7343-19    | 7.30±0.30 | 4.30±0.30 | 1.90±0.30 | 1.30±0.30 | 2.40±0.20      |
| H              | 2917     | 7343-21    | 7.30±0.30 | 4.30±0.30 | 2.10±0.30 | 1.30±0.30 | 2.40±0.20      |
| D              | 2917     | 7343-28    | 7.30±0.30 | 4.30±0.30 | 2.80±0.30 | 1.30±0.30 | 2.40±0.20      |
| Y              | 2917     | 7343-40    | 7.30±0.30 | 4.30±0.30 | 4.00±0.30 | 1.30±0.30 | 2.40±0.20      |


DIMENSIONS -- Unit: mm



| Case Size Code | EIA Code | EIA Metric | L          | W1        | H         | S         | W <sub>2</sub> |
|----------------|----------|------------|------------|-----------|-----------|-----------|----------------|
| E              | 2917     | 7343-43    | 7.30±0.30  | 4.30±0.30 | 4.30±0.30 | 1.30±0.30 | 2.40±0.20      |
| F              | 2924     | 7361-19    | 7.30±0.30  | 6.10±0.30 | 1.90±0.30 | 1.40±0.30 | 3.00±0.20      |
| V              | 2924     | 7361-36    | 7.30±0.30  | 6.10±0.30 | 3.60±0.30 | 1.40±0.30 | 3.00±0.20      |
| W              | 2924     | 7361-41    | 7.30±0.30  | 6.10±0.30 | 4.10±0.30 | 1.40±0.30 | 3.00±0.20      |
| X              | 2924     | 7360-60    | 7.30±0.30  | 6.00±0.30 | 6.00±0.30 | 1.50±0.20 | 4.00±0.20      |
| Z              | 2924     | 7360-80    | 7.30±0.30  | 6.00±0.30 | 8.00±0.30 | 1.50±0.20 | 4.00±0.20      |
| G              | 3330     | 8R7R-4R    | 8.50±0.30  | 7.50±0.30 | 4.50±0.30 | 1.80±0.20 | 4.00±0.20      |
| S              | 4335     | 1190-4R    | 11.00±0.30 | 9.00±0.30 | 4.50±0.30 | 1.50±0.20 | 7.00±0.20      |
| T              | 4349     | 1112R-55   | 11.00±0.30 | 12.5±0.30 | 5.50±0.30 | 2.10±0.20 | 10.50±0.40     |

## LAND DIMENSIONS

Density Level A: For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes.

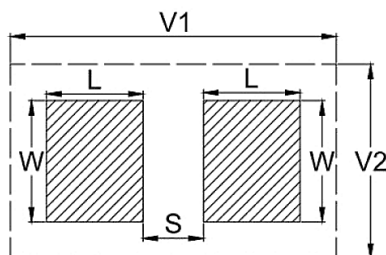

### Note:


- Height of these chips may create problems in wave soldering.
- Land pattern geometry is too small for silkscreen outline.

| Case Code | EIA Metric | Dimension (mm) |      |      |       |      |
|-----------|------------|----------------|------|------|-------|------|
|           |            | W              | L    | S    | V1    | V2   |
| A         | 3216-16    | 1.35           | 2.20 | 0.62 | 6.02  | 2.80 |
| B         | 3528-19    | 2.35           | 2.21 | 0.92 | 6.32  | 4.00 |
| C         | 6032-25    | 2.35           | 2.77 | 2.37 | 8.92  | 4.50 |
| D         | 7343-28    | 2.55           | 2.77 | 3.67 | 10.22 | 5.60 |
| E         | 7343-41    | 2.55           | 2.77 | 3.67 | 10.22 | 5.60 |
| F         | 7361-19    | 3.25           | 2.77 | 3.67 | 10.22 | 7.30 |
| H         | 7343-21    | 2.55           | 2.77 | 3.67 | 10.22 | 5.60 |
| H1        | 7343-15    | 2.55           | 2.77 | 3.67 | 10.22 | 5.60 |
| L         | 7343-19    | 2.55           | 2.77 | 3.67 | 10.22 | 5.60 |
| V         | 7361-36    | 3.25           | 2.77 | 3.67 | 10.22 | 7.30 |
| W         | 7361-41    | 3.25           | 2.77 | 3.67 | 10.22 | 7.30 |
| Y         | 7343-40    | 2.55           | 2.77 | 3.67 | 10.22 | 5.60 |

## LAND DIMENSIONS

Density Level B: For products with a moderate level of component density. Provides Recommended Profile

Conditions for reflow solder processes.

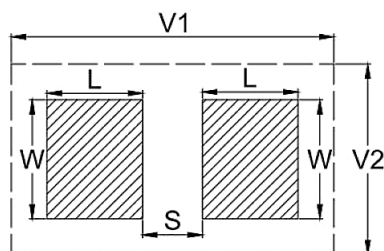


### Note:

- Height of these chips may create problems in wave soldering.
- Land pattern geometry is too small for silkscreen outline.

| Case Code | EIA Metric | Dimension (mm) |      |      |      |      |
|-----------|------------|----------------|------|------|------|------|
|           |            | W              | L    | S    | V1   | V2   |
| A         | 3216-16    | 1.23           | 1.80 | 0.82 | 4.92 | 2.30 |
| B         | 3528-19    | 2.23           | 1.80 | 1.12 | 5.22 | 3.50 |
| C         | 6032-25    | 2.23           | 2.37 | 2.57 | 7.82 | 4.00 |
| D         | 7343-28    | 2.43           | 2.37 | 3.87 | 9.12 | 5.10 |
| E         | 7343-41    | 2.43           | 2.37 | 3.87 | 9.12 | 5.10 |
| F         | 7361-19    | 3.13           | 2.37 | 3.87 | 9.12 | 6.80 |
| H         | 7343-21    | 2.43           | 2.37 | 3.87 | 9.12 | 5.10 |
| H1        | 7343-15    | 2.43           | 2.37 | 3.87 | 9.12 | 5.10 |
| L         | 7343-19    | 2.43           | 2.37 | 3.87 | 9.12 | 5.10 |
| V         | 7361-36    | 3.13           | 2.37 | 3.87 | 9.12 | 6.80 |
| W         | 7361-41    | 3.13           | 2.37 | 3.87 | 9.12 | 6.80 |
| Y         | 7343-40    | 2.43           | 2.37 | 3.87 | 9.12 | 5.10 |

## LAND DIMENSIONS

Density Level C: For high component density product applications. Before adapting the Min. land pattern variations, the user should perform qualification testing based on the conditions outlined in IPC - 7351).

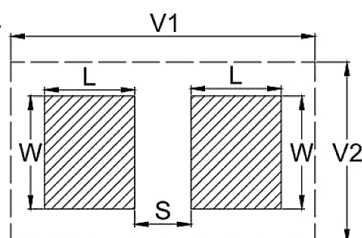

### Note:

- Height of these chips may create problems in wave soldering.
- Land pattern geometry is too small for silkscreen outline.

| Case Code | EIA Metric | Dimension (mm) |      |      |      |      |
|-----------|------------|----------------|------|------|------|------|
|           |            | W              | L    | S    | V1   | V2   |
| A         | 3216-16    | 1.13           | 1.42 | 0.98 | 4.06 | 2.04 |
| B         | 3528-19    | 2.13           | 1.42 | 1.28 | 4.36 | 3.24 |
| C         | 6032-25    | 2.13           | 1.99 | 2.73 | 6.96 | 3.74 |
| D         | 7343-28    | 2.33           | 1.99 | 4.03 | 8.26 | 4.84 |
| E         | 7343-41    | 2.33           | 1.99 | 4.03 | 8.26 | 4.84 |
| F         | 7361-19    | 3.03           | 1.99 | 4.03 | 8.26 | 6.54 |
| H         | 7343-21    | 2.33           | 1.99 | 4.03 | 8.26 | 4.84 |
| H1        | 7343-15    | 2.33           | 1.99 | 4.03 | 8.26 | 4.84 |
| L         | 7343-19    | 2.33           | 1.99 | 4.03 | 8.26 | 4.84 |
| V         | 7361-36    | 3.03           | 1.99 | 4.03 | 8.26 | 6.54 |
| W         | 7361-41    | 3.03           | 1.99 | 4.03 | 8.26 | 6.54 |
| Y         | 7343-40    | 2.33           | 1.99 | 4.03 | 8.26 | 4.84 |

MARKING



| Voltage Code     | F   | G   | J   | A  | C  | D  | E  | V  | H  | T  | 63V | 75V | 100V |
|------------------|-----|-----|-----|----|----|----|----|----|----|----|-----|-----|------|
| Rate Voltage (V) | 2.5 | 4.0 | 6.3 | 10 | 16 | 20 | 25 | 35 | 40 | 50 | 63  | 75  | 100  |

MAXIMUM OPERATING AND SURGE VOLTAGES VS. TEMPERATURE

| Rate Voltage (V <sub>R</sub> )     | ≤ 85°C  | 2.5 | 4.0 | 6.3 | 10   | 16   | 20   | 25   |
|------------------------------------|---------|-----|-----|-----|------|------|------|------|
| Category Voltage (V <sub>C</sub> ) | ≤ 125°C | 1.7 | 2.7 | 4.2 | 6.7  | 10.7 | 13.3 | 16.7 |
| Surge Voltage (V <sub>S</sub> )    | ≤ 85°C  | 2.9 | 4.6 | 7.2 | 11.5 | 18.4 | 23.0 | 28.8 |
| Surge Voltage (V <sub>S</sub> )    | ≤ 125°C | 1.9 | 3.1 | 4.8 | 7.7  | 12.3 | 15.3 | 19.2 |

| Rate Voltage (V <sub>R</sub> )     | ≤ 85°C  | 35   | 40   | 50   | 63   | 75   | 100  |
|------------------------------------|---------|------|------|------|------|------|------|
| Category Voltage (V <sub>C</sub> ) | ≤ 125°C | 23.3 | 26.7 | 33.3 | 42   | 50   | 66.7 |
| Surge Voltage (V <sub>S</sub> )    | ≤ 85°C  | 40.3 | 46.0 | 57.5 | 72.5 | 86.3 | 115  |
| Surge Voltage (V <sub>S</sub> )    | ≤ 125°C | 26.8 | 30.7 | 38.3 | 48.3 | 57.5 | 76.7 |

## BASIC INFORMATION

| ITEM               | CHARACTERISTIC                             |
|--------------------|--------------------------------------------|
| Dielectric         | Ta2O5                                      |
| Electrolyte        | PEDOT                                      |
| Package Method     | Epoxy Resin Molding (Semi-Seal)            |
| Case Color         | Black (standard) or Yellow                 |
| MSL                | III                                        |
| Termination Finish | Standard solder-coated, Gold-plated option |

## STANDARD CHARACTERISTICS

|                             |                  |
|-----------------------------|------------------|
| PART CODE                   | CA55D025M476TA   |
| Case Size Code              | D                |
| Case Dimension              | L7.3*W4.3*H2.8mm |
| EIA Code                    | 7343-28 (2917)   |
| Capacitance Tolerance       | ±20%             |
| Rate Temperature Range      | 85 °C            |
| Category Voltage            | 16.7V            |
| Category Temperature Range  | 125 °C           |
| Operating Temperature Range | -55~ + 125 °C    |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | F                                      | G                                                                      | J                                                                             |
|--------------|----------|----------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Voltage (V)  |          | 2.5                                    | 4                                                                      | 6.3                                                                           |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                     |                                                                        |                                                                               |
| 105          | 1        | A(400)                                 | A(400)                                                                 | A(400)                                                                        |
| 155          | 1.5      |                                        |                                                                        |                                                                               |
| 225          | 2.2      | A(400)                                 | A(400)                                                                 | A(400)                                                                        |
| 335          | 3.3      | A(400)                                 | A(400)                                                                 | A(400)                                                                        |
| 475          | 4.7      | A(400)                                 | A(400)                                                                 | A(400) B(300)                                                                 |
| 685          | 6.8      | A(400) B(200)                          | A(400) B(300)                                                          | A(400) B(300) C(300)                                                          |
| 106          | 10       | A(400) B(200)                          | A(400) B(200)                                                          | A(100,250,400,650)<br>B(300) C(200)                                           |
| 156          | 15       | A(400) B(200)                          | A(100,500,650)<br>B(100,400,500,600)                                   | A(100,250,500,650)<br>B(400,500,600)<br>C(200)                                |
| 226          | 22       | A(400) B(200)                          | A(100,250,400,650)<br>B(70,150,250,400)<br>C(70,100,150,250)           | A(100,150,250,350,650)<br>B(150,250,400)<br>C(100,150,250)                    |
| 336          | 33       | B(200) C(150)                          | A(100,500,650)<br>B(45,150,250,400)<br>C(45,100,150,250)               | A(500,650)<br>B(45,150,250,400)<br>C(100,150,200,250) D(100)                  |
| 476          | 47       | A(100,200,400,650)<br>B(150)<br>C(120) | A(100,200,350,650)<br>B(45,70,150,250,400)<br>C(100,150,250)<br>D(100) | A(100,200,400,650)<br>B(45,150,250,400)<br>C(100,150,250)<br>D(100)<br>E(100) |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | F                                                                                                                | G                                                                                                    | J                                                                                                                                                                         |
|--------------|----------|------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage (V)  |          | 2.5                                                                                                              | 4                                                                                                    | 6.3                                                                                                                                                                       |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                                                                               |                                                                                                      |                                                                                                                                                                           |
| 686          | 68       | A(100,500,650)<br>B(150)<br>C(120)                                                                               | A(100,150,500,650)<br>B(150,250,400)<br>C(100,150,200)<br>D(90)                                      | A(100,500,650)<br>B(45,150,250,400)<br>C(100,150,200)<br>D(100,150,200)<br>E(70)                                                                                          |
| 107          | 100      | A(100,150,500,650)<br>B(45,70,250,400)<br>C(100)<br>D(90)<br>E(70)                                               | A(100,150,200,500,650)<br>B(45,70,200,400)<br>C(70,100,150,200)<br>D(90)<br>E(70)                    | A(100,500,650)<br>B(45,70,150,250,400)<br>B1(150,250,400)<br>C(45,100,150,200)<br>D(25,100,150,200)<br>H(45,70,100,150)<br>H1(60,150)<br>L(45,70,100,150)<br>E(70) V(150) |
| 157          | 150      | B(45,70,150,250,400)<br>D(90)<br>E(70)                                                                           | B(45,70,150,250,400)<br>C(45,70,100,150,250)<br>D(100,150,200)<br>H(25,40,70,100,150)<br>L(25,40,80) | B(45,70,100,150,250,400)<br>C(45,100,150,250)<br>D(25,40,100,150,200)<br>H(18,25,40,70,100,150)<br>L(18,25,40,70,100,150)                                                 |
| 227          | 220      | B(45,70,100,200,300)<br>C(45,70,100,150,200)<br>D(25,40,60,100,150)<br>H(25,40,60,80)<br>L(25,40,60,80)<br>E(70) | B(150,300,400)<br>C(100,150,200)<br>D(60,100,150)<br>H(40,60,80)<br>L(40,60,80)                      | B(45,70,150,300,400)<br>C(45,80,150,200)<br>D(18,25,40,60,100,150)<br>E(25,40,80,150,200)<br>H(18,25,40,60,80)<br>L(18,25,40,80)                                          |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | F                                                                                      | G                                                                                                       | J                                                                                                          |
|--------------|----------|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Voltage (V)  |          | 2.5                                                                                    | 4                                                                                                       | 6.3                                                                                                        |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                                                     |                                                                                                         |                                                                                                            |
| 337          | 330      | C(25,45,60,100,150)<br>D(25,40,50,80,100)<br>H(18,25,70,100)<br>L(18,25,70,100)        | C(25,45,60,100,150)<br>D(25,40,45,50,80,100)<br>E(25,35,40,60,80,100)<br>H(18,25,70,100)<br>L(18,25,70) | C(60,100,150)<br>D(18,25,40,50,80,100)<br>E(18,25,40,60,80,100)<br>H(18,40,80)<br>L(18,40,80)              |
| 477          | 470      | C(25,40,70,100,250)<br>D(15,25,40,60,100)<br>H(18,25,50,80)<br>L(18,25,50,80)<br>E(70) | D(18,25,40,60,100)<br>E(25,35,40,60,100,150)<br>H(40,60,100)<br>L(40,60,100)<br>V(60)                   | D(25,30,40,60,100)<br>E(25,35,40,60,100)<br>H(40,60,100)<br>L(40,60,100)<br>V(40)<br>Y(18,25,50)<br>W(150) |
| 687          | 680      | E(18,25,50)<br>V(60)                                                                   | E(30,50,80)<br>V(60)<br>W(60)                                                                           | E(25,50)<br>V(60)<br>W(60)                                                                                 |
| 108          | 1000     | D(25,50,100,200)<br>E(25,50)<br>V(60)                                                  | E(25,50,100)<br>V(60)<br>W(60)                                                                          | W(60)                                                                                                      |
| 158          | 1500     | W(60)                                                                                  | T(60)                                                                                                   | T(60)<br>F(60)                                                                                             |
| 228          | 2200     | T(60)                                                                                  | T(60)                                                                                                   | T(60)                                                                                                      |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | A                                  | C                                                    | D                                                    | E                                                    |
|--------------|----------|------------------------------------|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| Voltage (V)  |          | 10                                 | 16                                                   | 20                                                   | 25                                                   |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                 |                                                      |                                                      |                                                      |
| 684          | 0.68     |                                    |                                                      |                                                      | A(800)<br>B(300,400)                                 |
| 105          | 1        | A(400)                             | A(500,550,600)<br>B(200,350,150)                     | A(800)<br>B(200,350,450)<br>C(300)                   | A(800)<br>B(200,350,450)<br>C(250)                   |
| 155          | 1.5      |                                    | A(800)<br>B(350,400,500)                             | A(800)<br>B(350,400,500)                             | B(350,400,500)<br>C(200,250,300)                     |
| 225          | 2.2      | A(400) B(300)                      | A(600)<br>B(350,400,500)<br>C(300)                   | A(600)<br>B(350,400,500)<br>C(300)                   | A(600)<br>B(350,400,500)<br>C(200,300,400)<br>D(250) |
| 335          | 3.3      | A(400) B(300)                      | A(400,650)<br>B(350,400,500)<br>C(300)               | A(400,650)<br>B(350,400,500)<br>C(200,400)           | B(350,400,500)<br>C(200,300,400)<br>D(250)           |
| 475          | 4.7      | A(100,500,650)<br>B(300)<br>C(300) | A(500,650)<br>B(300,400,500)<br>C(200,300)           | B(300,400,500)<br>C(200,300,400)<br>D(140) E(100)    | B(300,400,500)<br>C(200,300,400)<br>D(140) E(200)    |
| 685          | 6.8      | A(100,500,650)<br>B(300)<br>C(300) | A(500,650)<br>B(200,250,300,400)<br>C(200)<br>D(200) | B(300,350,400)<br>C(200,300,400)<br>D(140)<br>E(100) | B(300,350,400)<br>C(200,300,400)<br>D(140)<br>E(200) |

CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | A                                                               | C                                                                                                                             | D                                                                                                | E                                                                                                                  |
|--------------|----------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Voltage (V)  |          | 10                                                              | 16                                                                                                                            | 20                                                                                               | 25                                                                                                                 |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                              |                                                                                                                               |                                                                                                  |                                                                                                                    |
| 106          | 10       | A(100,250,400,650)<br>B(250,350,400)<br>C(200)<br>D(200)        | A(250,400,650)<br>B(250,350,400)<br>C(200)<br>D(200)<br>E(100)                                                                | B(250,350,400)<br>C(200,250,300)<br>D(140)<br>E(100)                                             | B(300,350,400)<br>C(200,250,300)<br>D(150)<br>E(180)                                                               |
| 156          | 15       | A(100,500,650)<br>B(400,500,600)<br>C(100)                      | B(400,500,600)<br>C(100,200)<br>D(90)                                                                                         | B(400,500,600)<br>C(100,150,200)<br>D(90,150)<br>E(100)                                          | B(400,500,600)<br>C(100,150,200)<br>D(90) E(150)<br>H(100) L(100)                                                  |
| 226          | 22       | A(100,250,300,650)<br>B(70,150,250,400)<br>C(100,150)<br>D(120) | B(150,250,400)<br>C(100,150,250)<br>D(100,150)<br>E(100)                                                                      | B(200,250,300)<br>C(100,150,250)<br>D(100,150)<br>E(100,150)<br>H(100,150,200)<br>L(100,150,200) | B(100,200,250,300)<br>C(150,200,250)<br>D(100,150,200)<br>E(100,150)<br>H(100,150,200)<br>L(100,150,200)<br>V(120) |
| 336          | 33       | B(45,70,150,250,400)<br>C(70,150,200,250)<br>D(100)<br>E(100)   | B(200,300,400)<br>B1(200,300,400)<br>C(150,200,250)<br>D(100,150,200)<br>E(100)<br>H(45,60,80,150,200)<br>L(45,60,80,150,200) | B(150,200,250,300)<br>C(150,200)<br>D(100,200)<br>E(100,150)<br>H(80,150)<br>V(150)              | C(150)<br>D(100,150,200)<br>E(100,150)<br>H(80,150,200)<br>L(80,150,200)<br>V(180) W(150)                          |
| 476          | 47       | B(70,150,250,400)<br>C(100,150,250)<br>D(100)<br>E(100)         | B(100,150,250)<br>C(100,150,250)<br>D(70,100,150,200)<br>E(60,80,100)<br>H(45,80,100)<br>L(50,100)                            | C(100,150,250)<br>D(100,150)<br>E(60,80)<br>H(80,150,200)<br>V(100)<br>W(150)                    | D(100,150,200)<br>H(100,150,200)<br>L(100,150,200)<br>E(60,80,100)<br>V(140)<br>W(150)                             |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | A                                                                                                                          | C                                                                                                            | D                                                                                         | E                                                                                                     |
|--------------|----------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Voltage (V)  |          | 10                                                                                                                         | 16                                                                                                           | 20                                                                                        | 25                                                                                                    |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                                                                                         |                                                                                                              |                                                                                           |                                                                                                       |
| 686          | 68       | C(45,60,100,150,200)<br>D(40,60,150)<br>H1(60,150)<br>H(40,45,100,150,200)<br>L(40,45,100,150,200)<br>E(70)                | C(100,150,200)<br>D(100,150,200)<br>H(100,150,200)<br>L(100,150,200)<br>E(80,100,150)<br>V(150)              | C(100,150,200)<br>D(100,150)<br>E(80,100)<br>V(120)<br>W(150)                             | H(100,200)<br>D(100,150)<br>E(80,100,150)<br>V(100,150)<br>W(140)                                     |
| 107          | 100      | B(45,70,150,250,400)<br>C(45,60,150,200)<br>D(25,55,100,150,200)<br>H(25,45,70,100,150)<br>L(25,45,70,100)<br>E(70) V(150) | C(150,200,250)<br>D(100,150,200)<br>H(70,100)<br>H1(100,200)<br>L(50,100)<br>E(100,150,200)<br>V(120) S(120) | C(150,200,250)<br>H(70,100)<br>D(100,200)<br>E(100,150,200)<br>V(100)<br>W(140)<br>F(120) | H(100,200)<br>L(100,200)<br>D(100,150,200)<br>E(100,150,200)<br>V(100,150)<br>W(140) T(140)<br>F(120) |
| 157          | 150      | C(55,100,150,250)<br>D(25,40,100,150,200)<br>E(25,40,80)<br>H(25,40,100,200)<br>L(25,40,100,200)                           | H(70,100,150)<br>L(60,80,150)<br>H1(100,150)<br>D(100,150,200)<br>E(80,150) V(70)<br>W(120)                  | E(80)<br>V(70)<br>W(120)                                                                  | E(50,100,200)<br>V(70,100)<br>W(140) T(140)                                                           |
| 227          | 220      | C(100,150,200)<br>D(25,40,60,100,150)<br>E(25,35,100)<br>H(25,40,100,150,200)<br>L(25,40,100,150,200)<br>V(90) W(150)      | H(100,150,200)<br>D(60,100,150)<br>E(80,150,200)<br>V(80,100,150)<br>F(75,100,150)<br>W(120)                 | E(100)<br>V(80)<br>W(120)<br>X(140)                                                       | E(50,100,200)<br>V(140)<br>W(140)<br>X(140)<br>T(140)                                                 |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | A                                                                                                           | C                                                            | D                             | E                          |
|--------------|----------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------------|----------------------------|
| Voltage (V)  |          | 10                                                                                                          | 16                                                           | 20                            | 25                         |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                                                                          |                                                              |                               |                            |
| 337          | 330      | C(60,100,150)<br>H(40,70,100)<br>L(40,70,100)<br>D(50,80,100)<br>E(60,80)<br>V(60)<br>Y(25,40,80)<br>W(150) | E(60,80,100)<br>V(60,100)<br>W(120)                          | V(60,100)<br>W(120)<br>X(140) | W(140)<br>X(140)<br>T(140) |
| 477          | 470      | D(60,100,150)<br>E(60,100,150)<br>V(70)<br>W(150)                                                           | E(40,100,200)<br>V(40,100,200)<br>W(120)<br>X(120)<br>T(120) | X(140)<br>T(120)              | X(140)<br>T(140)           |
| 687          | 680      | V(60)<br>W(150)<br>T(60)                                                                                    | W(120)<br>X(120)<br>T(120)                                   | T(120)                        | T(140)                     |
| 108          | 1000     | W(100)<br>T(60)                                                                                             | T(120)                                                       | T(120)                        |                            |
| 158          | 1500     | T(200)                                                                                                      | T(120)                                                       |                               |                            |
| 228          | 2200     |                                                                                                             | T(120)                                                       |                               |                            |

CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | V                                              | H  | T                                                |
|--------------|----------|------------------------------------------------|----|--------------------------------------------------|
| Voltage (V)  |          | 35                                             | 40 | 50                                               |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                             |    |                                                  |
| 104          | 0.1      | A(900) B(900)                                  |    | A(900) B(900) C(600)                             |
| 154          | 0.15     | A(900) B(900)                                  |    | A(900) B(900)                                    |
| 224          | 0.22     | A(900) B(900)                                  |    | A(900) B(900)                                    |
| 334          | 0.33     | A(900) B(900)                                  |    | A(900) B(900)                                    |
| 474          | 0.47     | A(800) B(500)                                  |    | B(600) C(400)                                    |
| 684          | 0.68     | A(800)<br>B(300,400)<br>C(400)                 |    | B(300,400)<br>C(400)                             |
| 105          | 1        | A(500,550,600)<br>B(200,350,450)<br>C(350)     |    | B(350,400,500)<br>C(400)<br>D(250)               |
| 155          | 1.5      | A(500,550,600)<br>B(350,400,500)<br>C(200,300) |    | B(350,400,500)<br>C(200,250,300)                 |
| 225          | 2.2      | B(350,400,500)<br>C(200,400)<br>D(250)         |    | B(1000)<br>C(200,300,400)<br>D(250) E(300)       |
| 335          | 3.3      | B(350,400,500)<br>C(200,400)<br>D(250)         |    | C(200,300,400)<br>D(150,200)<br>H(200) E(250)    |
| 475          | 4.7      | B(400,600)<br>C(200,300)<br>D(200)<br>E(200)   |    | C(200,300)<br>D(150,200,300)<br>H(200)<br>E(250) |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |           | V                                                                                                      | H  | T                                                                      |
|--------------|-----------|--------------------------------------------------------------------------------------------------------|----|------------------------------------------------------------------------|
| Voltage (V)  |           | 35                                                                                                     | 40 | 50                                                                     |
| Cap. Code    | Cap. (μf) | Case Code (ESR mΩ)                                                                                     |    |                                                                        |
| 685          | 6.8       | B(200,400,600)<br>B(400)<br>C(200,300,400)<br>D(150,200)<br>E(200)                                     |    | C(200,300)<br>D(150,200,250)<br>H(100,150,200)<br>L(100,200)<br>E(250) |
| 106          | 10        | B(200,400,600)<br>C(200,250,300)<br>D(200,250,300)<br>E(150)<br>H(200,250,300)<br>L(200,300)<br>V(250) |    | C(200,300)<br>D(100,200,300)<br>E(150,200)<br>V(250)<br>W(250)         |
| 156          | 15        | C(200,250,300)<br>D(90,150,200)<br>E(150)<br>H(100,150,200)<br>L(100,200) V(200)                       |    | D(200)<br>E(150,200)<br>V(150)                                         |
| 226          | 22        | C(150,200,250)<br>D(100,150,200)<br>E(100)<br>H(100,150,200)<br>L(100,150,200)<br>V(200)<br>W(200)     |    | D(100,200,250)<br>E(100,150)<br>V(100)<br>W(200)<br>T(200)             |
| 336          | 33        | D(100,150,200)<br>E(100,150,200)<br>V(100,150)<br>W(200)                                               |    | D(100,200)<br>E(150,200)<br>V(100)<br>W(200)                           |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | V                                                                                         | H               | T                                                         |
|--------------|----------|-------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------|
| Voltage (V)  |          | 35                                                                                        | 40              | 50                                                        |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                                                        |                 |                                                           |
| 476          | 47       | D(100,150)<br>E(60,80,100)<br>V(100)<br>H(100,200)<br>L(100,200)<br>H1(100,200)<br>W(180) | H1(100,200,300) | E(60,100,150,400)<br>V(200)<br>W(200)<br>X(200)<br>T(200) |
| 686          | 68       | H(100,200,300)<br>D(100,200)<br>E(80,100)<br>V(100) W(180)<br>X(180) T(200)               |                 | V(200)<br>W(200)<br>X(200)<br>T(200)                      |
| 107          | 100      | E(80,100)<br>V(100)<br>F(100,200)<br>W(180) X(180) T(180)                                 |                 | W(200)<br>X(200)<br>S(200)<br>T(200)                      |
| 157          | 150      | W(180)<br>X(180)<br>T(180)                                                                |                 | X(200)<br>T(200)<br>Y(200)                                |
| 227          | 220      | X(180)<br>T(180)                                                                          |                 | X(200)<br>T(200)<br>Y(200)                                |
| 337          | 330      | T(180)                                                                                    |                 |                                                           |
| 477          | 470      | T(140)                                                                                    |                 |                                                           |

## CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | 63V                                            | 75V                        | 100V                       | 125V |
|--------------|----------|------------------------------------------------|----------------------------|----------------------------|------|
| Voltage (V)  |          | 63                                             | 75                         | 100                        | 125  |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                             |                            |                            |      |
| 104          | 0.1      | A(900)<br>B(900)<br>C(600)                     | B(800)<br>C(800)           | B(800)<br>C(800)           |      |
| 154          | 0.15     | A(900)<br>B(900)                               | B(800)<br>C(800)           | B(800)<br>C(800)           |      |
| 224          | 0.22     | A(900)<br>B(900)                               | B(800)<br>C(800)           | B(800)<br>C(800)           |      |
| 334          | 0.33     | A(900)<br>B(900)                               | B(800)<br>C(800)           | B(800)<br>C(800)           |      |
| 474          | 0.47     | B(800)<br>C(400)                               | B(800)<br>C(450)           | B(800)<br>C(550)           |      |
| 684          | 0.68     | B(800)<br>C(450)                               | B(800)<br>C(550)<br>D(400) | B(600)<br>C(400)<br>D(300) |      |
| 105          | 1        | B(350,400,500)<br>C(200,250,300)<br>D(150,200) | C(450)<br>D(250)<br>E(300) | C(450)<br>D(300)<br>E(300) |      |
| 155          | 1.5      | C(200,250,300)<br>D(150,200)<br>E(300)         | C(450)<br>D(250)<br>E(300) | D(300)<br>E(300)           |      |
| 225          | 2.2      | C(200,300)<br>D(150)<br>E(300)                 | C(450)<br>D(250)<br>E(300) | E(300)<br>V(300)           |      |

**CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST**

| VOLTAGE CODE |          | 63V                                                             | 75V                                              | 100V                       | 125V                       |
|--------------|----------|-----------------------------------------------------------------|--------------------------------------------------|----------------------------|----------------------------|
| Voltage (V)  |          | 63                                                              | 75                                               | 100                        | 125                        |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                                              |                                                  |                            |                            |
| 335          | 3.3      | C(200)<br>D(150)<br>E(250)                                      | D(250)<br>E(250)<br>V(300)<br>W(300)             | V(300)<br>W(300)           | D(300)                     |
| 475          | 4.7      | D(150,200,250)<br>E(150)<br>V(250)                              | D(250)<br>E(250)<br>V(250)<br>W(300)             | V(300)<br>W(300)           | D(300)<br>E(300)           |
| 685          | 6.8      | D(150)<br>E(150,200)<br>V(250)                                  | D(250)<br>E(250)<br>V(250)<br>W(300)             | V(300)<br>W(300)<br>S(300) | E(300)<br>V(300)<br>W(300) |
| 106          | 10       | D(150,200,250,300)<br>E(150,200,250)<br>V(250) W(250)<br>S(250) | E(250)<br>V(250)<br>W(250)<br>S(250)<br>T(250)   | W(400)<br>S(350)<br>T(300) | E(500)<br>V(500)<br>W(500) |
| 156          | 15       | E(150,200,250)<br>V(150)<br>W(250)                              | E(200,300,400)<br>V(250)<br>W(300) X(250) T(250) | X(300)<br>S(300)<br>T(300) | W(500)<br>X(500)           |
| 226          | 22       | E(80,150,200,300)<br>V(250) W(250)<br>T(250)                    | V(350)<br>W(250) X(250)<br>T(250)                | X(300)<br>T(300)<br>Y(300) | W(600)<br>X(500)<br>T(400) |
| 336          | 33       | V(250)<br>W(250)<br>T(250)                                      | W(250)<br>X(250)<br>T(250)                       | T(300)<br>Y(300)           | T(400)<br>Y(400)           |

CASE CODE, RATED VOLTAGE, CAPACITANCE AND ESR LIST

| VOLTAGE CODE |          | 63V                                            | 75V                        | 100V             | 125V             |
|--------------|----------|------------------------------------------------|----------------------------|------------------|------------------|
| Voltage (V)  |          | 63                                             | 75                         | 100              | 125              |
| Cap. Code    | Cap.(μf) | Case Code (ESR mΩ)                             |                            |                  |                  |
| 476          | 47       | V(250)<br>W(250)<br>G(250)<br>X(250)<br>T(250) | X(250)<br>T(250)<br>Y(250) | T(300)<br>Y(300) | T(600)<br>Y(600) |
| 686          | 68       | W(200)<br>X(200)<br>T(250)                     | T(250)<br>Y(250)           | T(300)<br>Y(300) | T(400)<br>Y(400) |
| 107          | 100      | X(200)<br>T(250)<br>Y(250)                     | T(250)                     | T(300)           |                  |
| 157          | 150      | X(200)<br>T(200)<br>Y(250)                     |                            |                  |                  |
| 227          | 220      | X(200)<br>Z(200)<br>Y(250)                     |                            |                  |                  |

ELECTRONICAL CHARACTERISTICS- RATED VOLTAGE 2.5V, CAPACITANCE TOL.  $\pm 10\%$  (K)

| Part Code      | Rate<br>Voltage<br>$\leq 85^{\circ}\text{C}$ | Cap.<br>@25°C<br>100Hz | ESR<br>@25°C<br>100<br>KHz | Max.<br>Dissipation<br>Factor (DF)<br>@25°C<br>100Hz | Max.<br>Leakage<br>Current<br>@+25°C<br>5 min. | Max. Ripple Current     |                         |                          |
|----------------|----------------------------------------------|------------------------|----------------------------|------------------------------------------------------|------------------------------------------------|-------------------------|-------------------------|--------------------------|
|                |                                              |                        |                            |                                                      |                                                | @<br>25°C<br>100<br>KHz | @<br>85°C<br>100<br>KHz | @<br>125°C<br>100<br>KHz |
|                | V                                            | $\mu\text{F}$          | m $\Omega$                 | %                                                    | $\mu\text{A}$                                  | mA                      |                         |                          |
| CA55B6R3M107TA | 6.3                                          | 100                    | 400                        | 10                                                   | 100                                            | 559                     | 503                     | 224                      |
| CA55B6R3M157TA | 6.3                                          | 150                    | 400                        | 10                                                   | 95                                             | 559                     | 503                     | 224                      |
| CA55C6R3M227TA | 6.3                                          | 220                    | 200                        | 10                                                   | 139                                            | 935                     | 842                     | 374                      |
| CA55B6R3M227TA | 6.3                                          | 220                    | 400                        | 10                                                   | 139                                            | 559                     | 503                     | 224                      |
| CA55C6R3M337TA | 6.3                                          | 330                    | 150                        | 10                                                   | 208                                            | 1080                    | 972                     | 432                      |
| CA55D6R3M477TA | 6.3                                          | 470                    | 100                        | 10                                                   | 296                                            | 1500                    | 1350                    | 600                      |
| CA55B010M476TA | 10                                           | 47                     | 400                        | 10                                                   | 47                                             | 559                     | 503                     | 224                      |
| CA55B010M107TA | 10                                           | 100                    | 400                        | 10                                                   | 100                                            | 559                     | 503                     | 224                      |
| CA55D010M107TA | 10                                           | 100                    | 150                        | 10                                                   | 100                                            | 1225                    | 1102                    | 490                      |
| CA55D010M227TA | 10                                           | 220                    | 150                        | 10                                                   | 220                                            | 1225                    | 1102                    | 490                      |
| CA55C010M227TA | 10                                           | 220                    | 200                        | 10                                                   | 220                                            | 935                     | 842                     | 374                      |
| CA55C010M337TA | 10                                           | 330                    | 150                        | 10                                                   | 330                                            | 1080                    | 972                     | 432                      |
| CA55D010M477TA | 10                                           | 470                    | 150                        | 10                                                   | 470                                            | 1225                    | 1102                    | 490                      |
| CA55E010M477TA | 10                                           | 470                    | 150                        | 10                                                   | 470                                            | 1291                    | 1162                    | 516                      |
| CA55C010M157TA | 10                                           | 150                    | 250                        | 10                                                   | 150                                            | 837                     | 753                     | 335                      |
| CA55B016M226TA | 16                                           | 22                     | 400                        | 10                                                   | 35                                             | 559                     | 503                     | 224                      |
| CA55B016M336TA | 16                                           | 33                     | 400                        | 10                                                   | 53                                             | 559                     | 503                     | 224                      |
| CA55C016M107TA | 16                                           | 100                    | 250                        | 10                                                   | 160                                            | 837                     | 753                     | 335                      |
| CA55D016M107TA | 16                                           | 100                    | 200                        | 10                                                   | 160                                            | 1061                    | 955                     | 424                      |
| CA55D016M157TA | 16                                           | 150                    | 200                        | 10                                                   | 240                                            | 1061                    | 955                     | 424                      |

**ELECTRONICAL CHARACTERISTICS- RATED VOLTAGE 2.5V, CAPACITANCE TOL. ±10% (K)**

| Part Code                      | Rate<br>Voltage<br>≤ 85°C | Cap.<br>@25°C<br>100Hz | ESR<br>@25°C<br>100<br>KHz | Max.<br>Dissipation<br>Factor (DF)<br>@25°C<br>100Hz | Max.<br>Leakage<br>Current<br>@+25°C<br>5 min. | Max. Ripple Current     |                         |                          |
|--------------------------------|---------------------------|------------------------|----------------------------|------------------------------------------------------|------------------------------------------------|-------------------------|-------------------------|--------------------------|
|                                |                           |                        |                            |                                                      |                                                | @<br>25°C<br>100<br>KHz | @<br>85°C<br>100<br>KHz | @<br>125°C<br>100<br>KHz |
|                                | V                         | μF                     | mΩ                         | %                                                    | μA                                             | mA                      |                         |                          |
| CA55D016M227TA                 | 16                        | 220                    | 100                        | 10                                                   | 352                                            | 1500                    | 1350                    | 600                      |
| CA55E016M337TA                 | 16                        | 330                    | 100                        | 10                                                   | 528                                            | 1581                    | 1423                    | 632                      |
| CA55D020M107TA                 | 20                        | 100                    | 200                        | 10                                                   | 200                                            | 1061                    | 955                     | 424                      |
| CA55H020M107TB                 | 20                        | 100                    | 150                        | 10                                                   | 100                                            | 1360                    | 1224                    | 544                      |
| CA55B025M156TA                 | 25                        | 15                     | 600                        | 10                                                   | 38                                             | 456                     | 411                     | 183                      |
| CA55C025M226TA                 | 25                        | 22                     | 250                        | 10                                                   | 55                                             | 837                     | 753                     | 335                      |
| <a href="#">CA55D025M476TA</a> | 25                        | 47                     | 200                        | 10                                                   | 118                                            | 1061                    | 955                     | 424                      |
| CA55D025M686TA                 | 25                        | 68                     | 150                        | 10                                                   | 170                                            | 1225                    | 1102                    | 490                      |
| CA55E025M107TA                 | 25                        | 100                    | 150                        | 10                                                   | 250                                            | 1291                    | 1162                    | 516                      |
| CA55D025M107TA                 | 25                        | 100                    | 200                        | 10                                                   | 250                                            | 1061                    | 955                     | 424                      |
| CA55D035M226TA                 | 35                        | 22                     | 200                        | 10                                                   | 77                                             | 1061                    | 955                     | 424                      |
| CA55C035M106TA                 | 35                        | 10                     | 300                        | 10                                                   | 35                                             | 764                     | 687                     | 306                      |
| CA55D035M336TA                 | 35                        | 33                     | 200                        | 10                                                   | 116                                            | 1061                    | 955                     | 424                      |
| CA55E035M336TA                 | 35                        | 33                     | 100                        | 10                                                   | 116                                            | 1581                    | 1423                    | 632                      |
| CA55D035M476TA                 | 35                        | 47                     | 150                        | 10                                                   | 165                                            | 1225                    | 1102                    | 490                      |
| CA55E035M476TA                 | 35                        | 47                     | 100                        | 10                                                   | 165                                            | 1581                    | 1423                    | 632                      |
| CA55C050M335TA                 | 50                        | 3.3                    | 400                        | 10                                                   | 17                                             | 661                     | 595                     | 265                      |
| CA55C050M225TA                 | 50                        | 2.2                    | 400                        | 10                                                   | 11                                             | 661                     | 595                     | 265                      |
| CA55E050M476TA                 | 50                        | 47                     | 100                        | 10                                                   | 235                                            | 1581                    | 1423                    | 632                      |
|                                |                           |                        |                            |                                                      |                                                |                         |                         |                          |

## APPLICATION NTOE

### STORAGE CONDITION

- Environmental temperature: 10°C ~ +30°C
- Relative humidity no more than 60%
- Storing period: No more than one and half year since the date of stocking.

### APPLICATION GUIDE

#### 1) Ripple Current and Voltage

If the ripple current is applied to the capacitor, the Joule heat (power dissipated) will be generated in the capacitor, so it will affect the reliability of the capacitor.

##### (1) Power Dissipated

The actual power dissipated can be calculated using the following formula:  $P=I^2 \times ESR$ .....Formula 1

P: Power dissipated (W); I: Ripple current (A); ESR: Equivalent series resistance ( $\Omega$ )

##### (2) Ripple Current

Using the maximum power dissipation 125mW Max., the ripple current can be calculated using the following

formula:  $I = \sqrt{\frac{P}{ESR}} \times K \times F$ .....Formula 2

K: Temperature derating factor..... Table 1; F: Frequency derating factor..... Table 2

ESR: Refer to the ratings of each specific product

Table 1: Temperature Drop Factor K

| Temperature | Temperature Derating Factor K |
|-------------|-------------------------------|
| 25 °C       | 1                             |
| 85 °C       | 0.9                           |
| 125 °C      | 0.4                           |

Table 2: Frequency Derating Factor F

| Frequency (KHz) | 10   | 100 | 500  | 1000 |
|-----------------|------|-----|------|------|
| MnO2            | 0.80 | 1.0 | 1.15 | 1.20 |
| Polymer         | 0.75 | 1.0 | 1.10 | 1.30 |

### (3) Ripple Voltage

The ripple voltage applied to the capacitor is limited by three criteria.

- (a) The power dissipation in the ESR of capacitor must not exceed 125mW Max. @+25°C
- (b) The positive peak AC voltage plus the DC bias voltage must not exceed the DC voltage rating of the capacitor.
- (c) The negative peak AC voltage, in combination with the bias voltage, if any , must not exceed the permissible reverse voltage ratings presented .

### 2) Reverse Voltage

Solid tantalum capacitors are polarized devices , and applied reverse voltage can not be allowed . If the reverse voltage is unavoidable, a small degree of transient reverse voltage is permissible for short periods as follow.

25°C..... 10% of Max. rated voltage or 1V whichever is smaller

85°C..... 5% of Max. rated voltage or 0.5V whichever is smaller

125°C.....1% of Max. rated voltage or 0.1V whichever is smaller

Even under these restrictions, capacitors can not be used continuously in reverse voltage mode.

### 3) Working Voltage

- (1) For general applications, using 50% of rated voltage of capacitors or less.
- (2) When used at the power circuit, low impedance circuit , coupling circuit or witching circuit which has leakage current problems, please design the circuit with voltage under 30% of the working voltage ( max 50%) to avoid the adverse effect of the surge current.
- (3) Derating voltage when temperature above 85°C.

When the chip tantalum capacitor is used at 85°C or more temperatures, the reduced voltage ( $U_T$ ) is calculated from the following expression, however, note that the ambient temperature is not more than 125°C.

$$U_T = V_0 (U_R - U_C)(T - 85) / 40$$

$U_R$ : Rated voltage (V);  $U_C$ : Derating voltage at 125°C;  $T$ : Ambient temperature (°C )

#### 4) Protective Resistance

In a circuit (switching circuit, charge / discharge circuit, etc.) that has an instantaneous current, series resistance is at least  $3\Omega/V$ , this can improve the reliability of tantalum capacitors. If the capacitor is in a low impedance circuit, the voltage applied to the capacitor should be half or one third of the rated voltage.

#### 5) Redundancy

MnO<sub>2</sub> tantalum capacitors will heat, and may cause fire and burn in the short circuit. This is determined by the situation, time and other factors. When the circuit is designed, it is possible to provide the best possible space to keep the tantalum capacitor reliability.

#### 6) Test Condition


Ambient Temperature 25°C; Relative Humidity 60 to 70%; Air Pressure 800 to 1060mbar. Test and experiment, in order to make the test results not problems, it is necessary to will test the product after fully discharge.

This product is a polar components, testing or when using it is strictly prohibited to will is negative pick back, in order to avoid performance failure

#### 7) Soldering


The SMD tantalum capacitor can be used for reflow soldering, which is not suitable for wave soldering and manual welding. The reflow temperature are  $\leq 250^{\circ}\text{C}$ ,  $\leq 5$  seconds. If you must use manual welding, should use the melted solder to contact lead, and the electric soldering iron power should be less than or equal to 25W, temperature should be less than  $300^{\circ}\text{C}$ , welding time should be less than 3 seconds, can not use electric iron contact the product lead directly, and in particular, can not contact the product ontology directly. Recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020D standard for moisture sensitivity testing

## RECOMMENDED PROFILE CONDITIONS –Only For reference

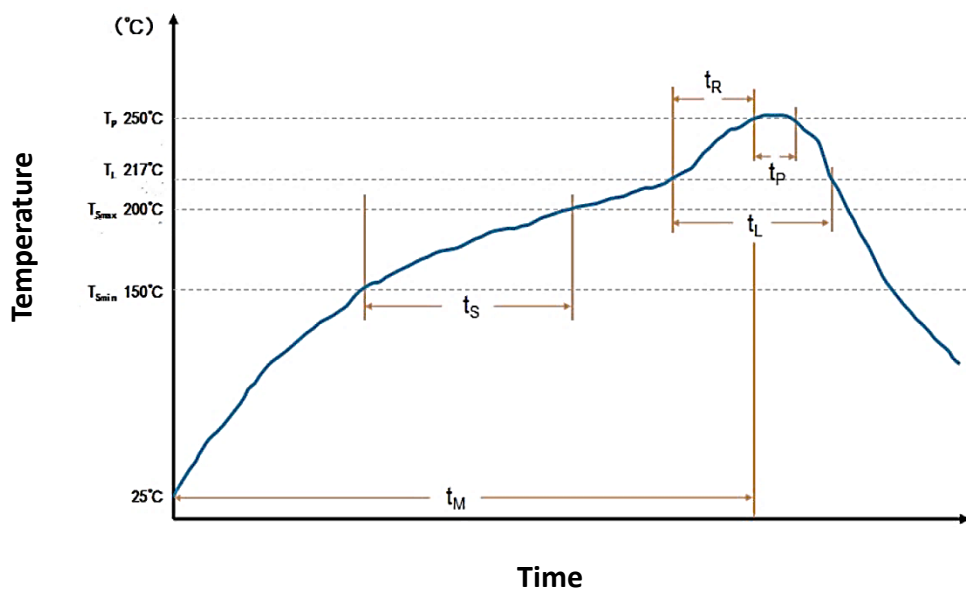

| CHARACTERISTICS                       | UNIT      | SYMBOL     | SnPb ASSEMBLY | Pb-Free ASSEMBLY |
|---------------------------------------|-----------|------------|---------------|------------------|
| Preheat Temperature Min.              | °C        | T smin     | 100           | 150              |
| Preheat Temperature Max.              | °C        | T smax     | 150           | 200              |
| Preheat time                          | Second    | T s        | 60~120        | 60~120           |
| Ramp-up Rate                          | °C/Second | T L to T p | ≤ 3           | ≤ 3              |
| Liquidous Temperature                 | °C        | T L        | 183           | 217              |
| Time Above Liquidous                  | Second    | t L        | 60~150        | 60~150           |
| Peak Temperature                      | °C        | T p        | 220 or 235    | 245 or 250       |
| Time within 5°C Max. Peak Temperature | Second    | t p        | ≤ 10          | ≤ 3              |
| Ramp-down Rate                        | °C/Second | T p to T L | ≤ 6           | ≤ 6              |
| Time 25°C to Peak Temperature         | minute    |            | ≤ 6           | ≤ 6              |


RECOMMENDED VOLTAGE DERATING GUIDELINES – Only For reference

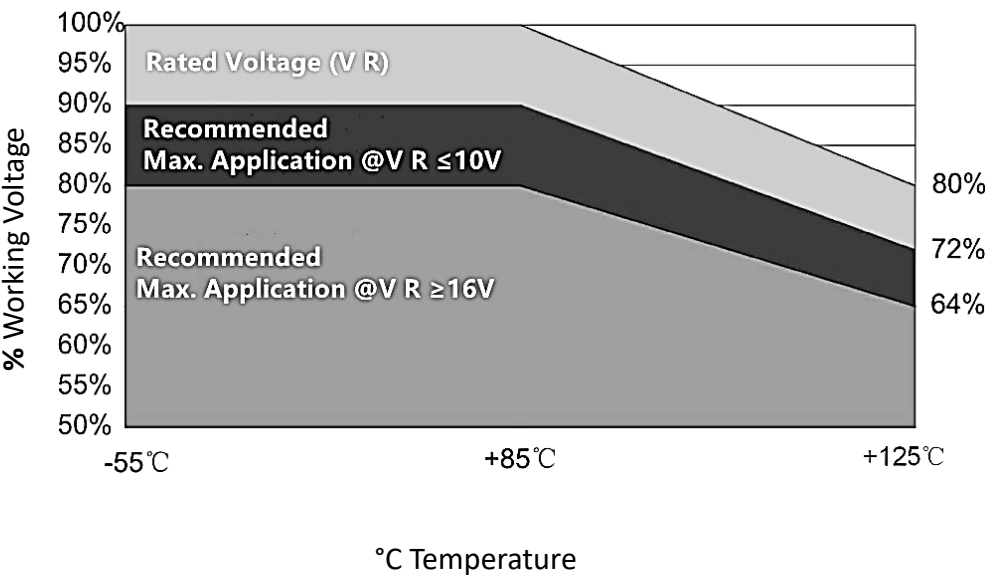

| Series Code | Electrolyte | Safe Load Voltage Max.              |          | -55°C~+85°C | +85°C~+125°C                             |
|-------------|-------------|-------------------------------------|----------|-------------|------------------------------------------|
| CA55        | PEDOT       | Energy Storage and Coupling Circuit |          | VR          | $VR - (VR - VC) * (T - 85) / 40$         |
|             |             | Filter Circuit                      | VR ≤ 10V | 90% VR      | $90% * [VR - (VR - VC) * (T - 85) / 40]$ |
|             |             |                                     | VR > 10V | 80% VR      | $80% * [VR - (VR - VC) * (T - 85) / 40]$ |


Note: VR: Rated voltage (V) at ≤ 85°C; VC: Derating voltage at 125°C; T: Ambient temperature (°C )

TAPE DIMENSION (Unit: mm) Tolerance  $\pm 0.2$ mm over 10 sprocket hole spaces

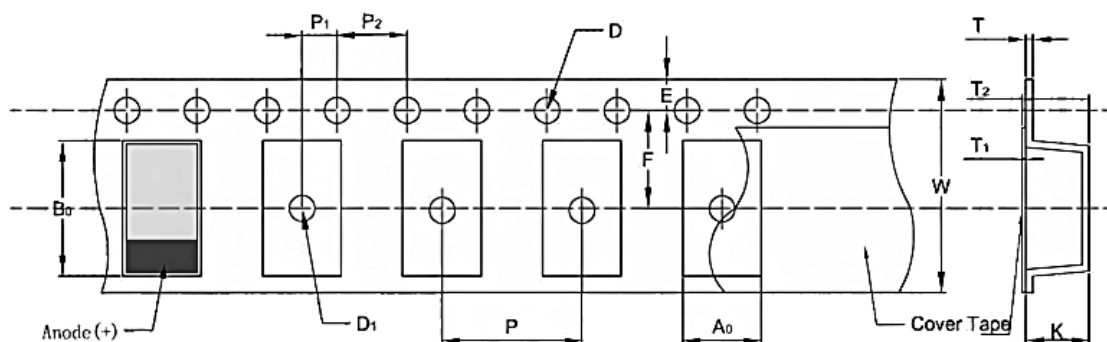

| CASE<br>SIZE<br>CODE | DIMENSION |           |           |           |           |            |           |            |           |           |            |
|----------------------|-----------|-----------|-----------|-----------|-----------|------------|-----------|------------|-----------|-----------|------------|
|                      | A0        | B0        | K         | W         | E         | F          | P2        | P          | P1        | D         | D1         |
|                      | $\pm 0.1$ | $\pm 0.1$ | $\pm 0.1$ | $\pm 0.3$ | $\pm 0.1$ | $\pm 0.05$ | $\pm 0.1$ | $\pm 0.05$ | $\pm 0.1$ | $\pm 0.2$ | $\pm 0.25$ |
| A                    | 1.88      | 3.53      | 1.90      | 8.00      | 1.75      | 3.50       | 4.00      | 4.00       | 2.00      | 1.55      | 1.00       |
| B1                   | 3.07      | 3.80      | 2.22      | 8.00      | 1.75      | 3.50       | 4.00      | 4.00       | 2.00      | 1.55      | 1.10       |
| B                    | 3.07      | 3.80      | 2.22      | 8.00      | 1.75      | 3.50       | 4.00      | 4.00       | 2.00      | 1.55      | 1.10       |
| C                    | 3.60      | 6.40      | 2.85      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.60       |
| H1                   | 4.60      | 7.60      | 2.16      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| L                    | 4.60      | 7.60      | 2.16      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| H                    | 4.60      | 7.60      | 2.16      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| F                    | 6.50      | 7.80      | 2.20      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.50       |
| D                    | 4.60      | 7.60      | 3.10      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| Y                    | 4.60      | 7.60      | 3.10      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| E                    | 4.60      | 7.60      | 4.40      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| V                    | 6.40      | 7.60      | 4.40      | 12.00     | 1.75      | 5.50       | 4.00      | 8.00       | 2.00      | 1.55      | 1.55       |
| W                    | 6.50      | 8.00      | 4.70      | 16.00     | 1.75      | 7.50       | 4.00      | 12.00      | 2.00      | 1.55      | 1.55       |

REEL DIMENSION (Unit: mm)

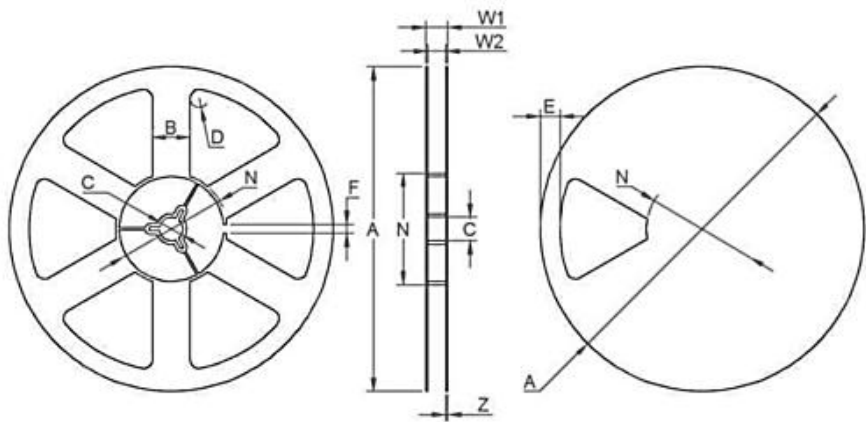

| REEL SIZE    | TAPE WIDE | DIMENSION |         |          |             |             |
|--------------|-----------|-----------|---------|----------|-------------|-------------|
|              |           | A         | B       | C        | W2          | W1          |
| 7" (180 mm)  | 8         | 178±2.0   | 50 Min. | 13.2±0.5 | 8.4+1.5/-0  | 10.8+1.5/-0 |
| 7" (180 mm)  | 12        | 178±2.0   | 50 Min. | 13.2±0.5 | 12.4+1.5/0  | 14.8+1.5/-0 |
| 7" (180 mm)  | 16        | 178±2.0   | 50 Min. | 13.2±0.5 | 16.0+1.5/-0 | 19.0+1.5/-0 |
| 13" (330 mm) | 12        | 330±2.0   | 50 Min. | 13.2±0.5 | 12.4+1.5/-0 | 16.5+1.5/-0 |

QTY PER REEL (Unit: pcs)

| CASE<br>SIZE<br>CODE | A    | B1   | B    | C   | H1   | L    | H    | F    | D   | Y   | E   | V   | W   |
|----------------------|------|------|------|-----|------|------|------|------|-----|-----|-----|-----|-----|
| Qty.                 | 2000 | 2000 | 2000 | 500 | 1000 | 1000 | 1000 | 1000 | 500 | 500 | 500 | 400 | 400 |

## IMPORTANT NOTES AND DISCLAIMER

1. **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does *NextGen* assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.