




**SPECIFICATION SHEET**

<b>SPECIFICATION SHEET NO.</b>	R0906-XS25M00000L004
<b>DATE</b>	Sep. 6, 2024
<b>REVISION</b>	A1
<b>DESCRIPTION</b>	DIP Crystal, 49S Type, L11.05*W4.65*H3.5mm, 2 pins, 25.0MHz, +/-30ppm, CL 18pF, Stability +/-30ppm @Operating Temp. Range - 40°C ~+85°C, ESR 60 ohm Max, RoHS/RoHS III compliant
<b>CUSTOMER</b>	
<b>CUSTOMER PART NUMBER</b>	
<b>CROSS REF. PART NUMBER</b>	
<b>ORIGINAL PART NUMBER</b>	TGS CS 25M0A30-18-30-40-60 BLF
<b>PART CODE</b>	XS25M00000L004

<b>VENDOR APPROVE</b>			
Issued/Checked/Approved			
DATE: Sep .6, 2024			

<b>CUSTOMER APPROVE</b>	
DATE:	

9/6/2024

**DIP CRYSTAL 49S TYPE 2 PINS**

**MAIN FEATURE**

- DIP Crystal, 49S Type, L11.05\*W4.65\*H3.5mm, 2 pins
- Low cost, High precision, High frequency stability
- Reflow Profile Condition 260 °C Max.
- Wide Frequency Range
- Cross more competitors part
- RoHS/RoHS III compliant



**APPLICATION**

- Bluetooth, wireless communication set
- Communication Electronics

**PART CODE GUIDE**

**RFQ**


[Request For Quotation](#)

<b>XS</b>	<b>25M00000</b>	<b>L</b>	<b>004</b>
1	2	3	4


- 1) XS: Part family Code for DIP Crystal, 49S Type, L11.05\*W4.65\*H3.5mm, 2 pins (CS)
- 2) 25M00000: Frequency range code for 25.0MHz
- 3) L: DIP type, Package Bulk
- 4) 004: Specification code for original part No.: **TGS CS 25M0A30-18-30-40-60 BLF**

**DIMENSION (Unit: mm, Tol. +/-0.15mm)**

Image for reference



CS


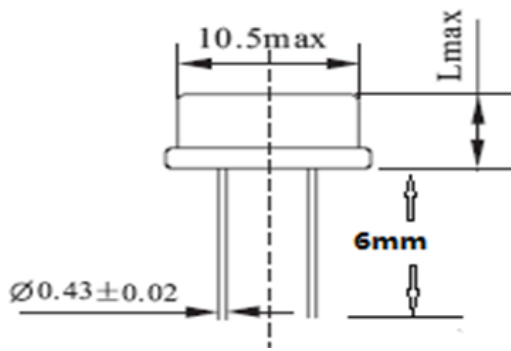


**Marking**

Line 1: TGS+ CL

Line 2: Freq. Range+ Internal Code

L:3.5mm

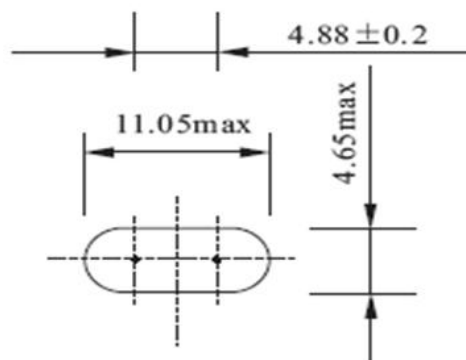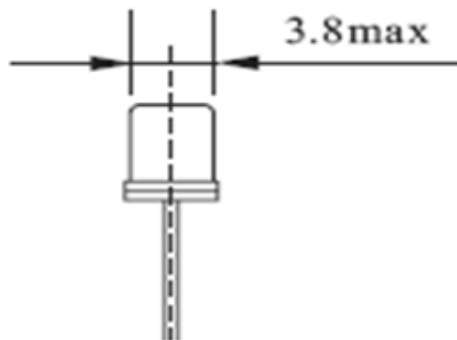

**DIP CRYSTAL 49S TYPE 2 PINS**
**ELECTRICAL PARAMETERS**


Parameter	Part No. Symbol	Units	Value			Condition
			Min.	Typical	Max.	
Original Manufacturer	TGS	TGS Crystals				
Holder Type	CS	DIP Crystal, 49S Type, L11.05*W4.65*H3.5mm, 2 pins				
Frequency Range	25M0	MHz	25.0			
Mode of Oscillation	A	AT Fundamental				
Frequency Tolerance	30	ppm	-30		+30	@25°C
Load Capacitance	-18	pF	18			
Stability over Operation Temperature	-30	ppm	-30		+30	
Operation Temperature	-40	°C	-40		+85	
Storage Temperature		°C	-40		+85	
Equivalent Series Resistance (ESR)	-60	Ω			60	
Drive Level		μW			100	
Shunt Capacitance (C0)		pF			7.0	
Motional Capacitance (C1)		fF	N/A			
DLD2		Ω	N/A			
FLD2		ppm	N/A			
RDL2		Ω	N/A			
SPDB		dB	N/A			
Aging		ppm/year			±5	@1 <sup>st</sup> year
Insulation Resistance		MΩ	500			@100VDC ± 15VDC
Others	Package	B	Bulk			
	RoHS Status	LF	RoHS III compliant			
	Add Value		N/A			
	Internal Control Code *		N/A			

 Note: 1) Original Part Number: **TGS CS 25M0A30-18-30-40-60 BLF**

9/6/2024

**SUGGESTED REFLOW PROFILE (For Reference Only)**

Condition:

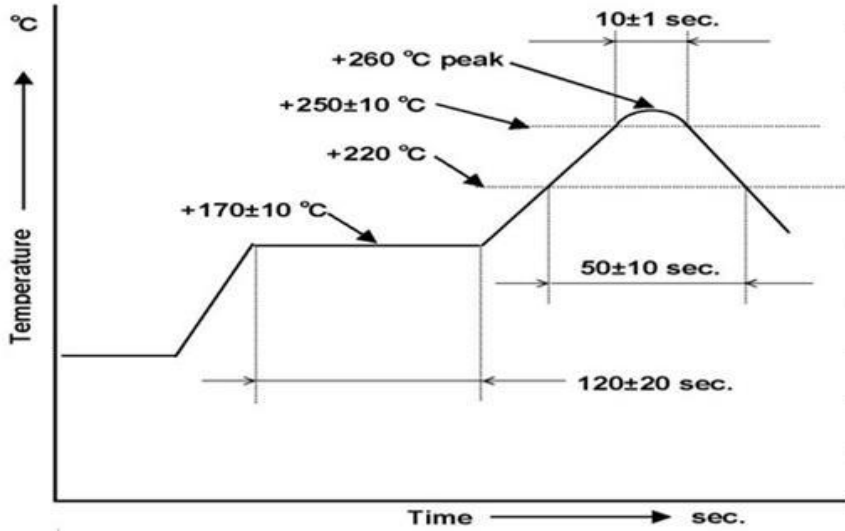

## CHARACTERISTICS

Units and values indicated with { } in this specification are the former units and the specified values.

### Standard atmospheric conditions:

Unless otherwise specified the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature: 15°C to 35°C

Relative humidity : 25% to 85%

Air pressure : 86 to 106 k Pa

If there is any doubt about the results measurements shall be made within the following limits:

Ambient temperature :  $25 \pm 1^\circ\text{C}$

Relative humidity : 63% to 67%

Air pressure : 86 to 106 k Pa

### Operating temperature range:

The operating temperature range is the range of ambient temperatures at which the quartz crystal oscillator can be stored without damage. Conditions are as specified elsewhere on these specifications.

Operating temperature range: -20°C to +70°C

### Storage temperature range:

The storage temperature range is the range of ambient temperatures at which the quartz crystal oscillator can be stored without damage. Conditions are as specified elsewhere on these specifications.

Storage temperature range: -40°C to +85°C

**DIP CRYSTAL 49S TYPE 2 PINS**

**Mechanical characteristics**


Provided that measurement shall be carried out after letting it alone in the room temperature for 1h

Item		specifications	
1	Shock	Shock Dropping three times from the height of 50cm onto hard wooden board of thickness more than 30mm.	
2	Vibration	(1) Vibration Frequency	10~55HZ
		(2) Cycle	1 to 2 Min
		(3) Amplitude	0.8mm
		(4) Direction	x. y. z
		(5) Time	2hr for each direction
3	Terminal Strength	(1) Pulling	a) Body of specimen shall be fixed and 8.82N of tension weight shall be supplied gradually to axial direction of terminals/lead-wires for 30s
			b) After above test a)there is no observation of any visual damages on the specimen
		(2) Bending	a) Body of specimen shall be fixed and 90 degree bending shall be given being supplied 225g tension weight, Afterthatterminalslead-wires shall be straightened the same bending and straightening shall be supplied to the opposite direction in the same axial
			b) After above tesla)there is no observation of any visual damages on the specimen
4	Stealing Tightness	There is no observation of gas bubble after specimen put into alcohol below1atm for 3 min.	
5	Solder ability	Terminals/lead-wires of specimen shall be dipped into solder melted tank at230± 5°C for 3± 0.5sec. Dipping depth shall be 2mm from the bottom of specimen's body. (After applying ROSIN flux) Soldering portion shall be covered in over 90% of terminals/lead-wires dipped	
6	Resistance to Soldering Heat	Terminals/lead-wires of specimen shall be dipped into solder melted tank at350± 10°C for 3-4sec. or 250± 5°C for 5± 1sec*'Frequency variation shall be within ± 5ppm and equivalent resistance less than ± 15% max after the testNote: Measuring the frequency should be done after keeping test samples at room temperature for 24 hours	
*'Frequency variation shall be within ± 5ppm and equivalent resistance less than ± 15% max after the test Note: Measuring the frequency should be done after keeping test samples at room temperature for 24 hours			

**Mechanical characteristics**

Provided that measurement shall be carried out after letting it alone in the room temperature for 1h

Item		specifications
1	Humidity	It alone at 40°C +2°C in humidity of 90~95% for 48h
2	Storage in Low Temperature	It alone at -40°C +2°C for 240h
3	Storage in High Temperature	It alone at 85°C +2°C for 240h
4	Temperature Cycle	The following temperature cycle (10 cycles) Refer to below Fig. Temperature shift from low to high, high to low shall be done in 1°C/C /min

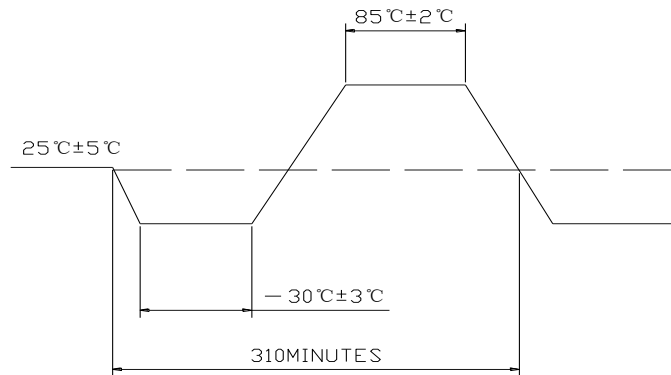

AFTER TEMPERATURE CYCLING

\*Frequency variation shall be within ± 5ppm and equivalent resistance less than ± 15% max after the test  
 Note: Measuring the frequency should be done after keeping test samples at room temperature for 24hours

## Notes

1. Only the lead should be heated when soldering

In case that the package temperature is exceeding 150°C It may impair the crystal or may cause the crystal quartz to destroy.

2. Pulling the lead strongly may cause cracking of the hermetic glass seal bending the lead closely from the case may also cause same problem so when the lead needs to be bent please leave more than 05mm of lead from the case.

3. Too much shock or vibration is not allowed. According to conditions such as machine shock during the assembly the internal quartz crystal might be damaged.

Please check your conditions carefully when using it in advance

4. Don't store or use in the environment that temperature may change rapidly to avoid the condensation. And also we recommend to store the products in the normal environment (Temperature humidity)

5. This product can be subjected to ultrasonic cleaning. However since the oscillator may be affected depending on the condition be sure to check it.

6. Applying excessive drive level to the quartz crystal may cause deterioration of characteristics or damage. Circuit design must be such as to maintain a proper drive level.

7. Unless adequate negative resistance is allocated in the oscillation circuit startup time of oscillation may be increased or no oscillation may occur. In order to avoid this provide enough negative resistance in the circuitry design.

## DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

9/6/2024