

SPECIFICATION SHEET

| SPECIFICATION SHEET NO. | Q0528-SIR314M200S043 |
|--|--|
| DATE | May 28, 2023 |
| REVISION | A0 |
| DESCRIPITION SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads SIR | |
| | 314.20000MHz, 1-Port, Insertion Loss: 2.0 dB Max. |
| | Tolerance ±100KHz |
| | Operating Temp. Range -40°C ~+85°C, |
| | Reflow Profile Condition 260 °C Max. Tape/Reel, 1000pcs/Reel |
| | RoHS/RoHS III compliant |
| CUSTOMER | |
| CUSTOMER PART NUMBER | |
| CROSS REF. PART NUMBER | |
| ORIGINAL PART NUMBER | TGS SIR 314.2MB TLF |
| PART CODE | SIR314M200S043 |

VENDOR APPROVE

Issued/Checked/Approved







DATE: May 28, 2023

| CUSTOMER APPROVE | | |
|-------------------------|--|--|
| | | |
| | | |

DATE:

5/28/2023



SMD SAW RESONATOR 5035 TYPE SIR SERIES

MAIN FEATURE

- SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads
- Package Code QCC4A
- One Port SAW Resonator
- Electrostatic Sensitive Device(ESD)
- Low-loss and Short Lead time
- Cross more competitors part
- RoHS/RoHS III compliant

APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

PART CODE GUIDE



| SIR | 314M200 | S | 043 |
|-----|---------|---|-----|
| 1 | 2 | 3 | 4 |


- 1) SIR: Series Code, SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 pads
- 2) 314M200: Frequency range code for 314.2000MHz
- 3) S: SMD type, Package Tape/Reel,
- 4) 043: Internal code (A~Z or 1~9 or Blank)

5/28/2023 2

SMD SAW RESONATOR 5035 TYPE SIR SERIES


DIMENSION (Unit: mm, Tol.: +-0.15mm)

Image for reference




SIR series,

Package Code QCC4A L5.0*W3.5*H1.5mm 5035 Type




| Pin | Configuration |
|-----|---------------|
| 1 | Input/Output |
| 3 | Output/Input |
| 2,4 | Ground |



Marking:

Standard + •: Pin 4

Test Circuit

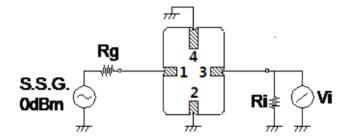

Rg=Ri=50Ω



SMD SAW RESONATOR 5035 TYPE SIR SERIES

ELECTRICAL PARAMETERS

| Parameter | Part No. Units Symbol | Value | | | |
|---|--------------------------|----------|---|--------------|------|
| | 7 | | Min. | Typical | Max. |
| Original Manufacturer | TGS | | | TGS Crystals | |
| Holder Type | SIR | | SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads | | |
| Frequency Range (f0) | 314.2M | MHz | 314.2000 | | |
| Frequency Tolerance | В | KHz | | ±100 | |
| Operation Temperance | | °C | -40 | | +85 |
| Storage Temperance | | °C | -55 | | +125 |
| DC Voltage | | V | | ±30 | |
| RF Power Dissipation | | dBm | | 10 | |
| Insertion Loss | | dB | | 1.5 | 2.0 |
| Quality Factor (Q) @Unload | | | | 17396 | |
| Quality Factor (Q) @50 Ω Loaded | | | | 2518 | |
| Turnover Temperature | | °C | 25 | 40 | 55 |
| Frequency Temp. Coefficient | | ppm/°C | | 0.032 | |
| Aging (Absolute Value during the First Year) | | ppm/Year | | ≤±10 | |
| DC Insulation Resistance | | ΜΩ | 1.0 | | |
| RF Equivalent RLC Model @Motional Resistance | | Ω | | 16.9 | 25.0 |
| RF Equivalent RLC Model @Motional Inductance | | μН | | 148.8 | |
| RF Equivalent RLC Model @Motional Capacitance | | fF | | 1.72 | |
| Static Capacitance | | pF | 2.3 | 2.6 | 2.9 |
| Package | Т | | | Tape/Reel | |
| RoHS Status | LF | | RoHS III compliant | | |
| Add Value | | | | Blank: N/A | |
| Internal Control Code | | | | Blank: N/A | |

Note: 1) Test Temperature: $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Terminating source impedance: 50Ω Terminating load impedance: 50Ω

2) Original Part Number: TGS SIR 314.2MB TLF


5/28/2023 4

www.NextGenComponent.com




SMD SAW RESONATOR 5035 TYPE SIR SERIES

FREQUENCY RESPONSE

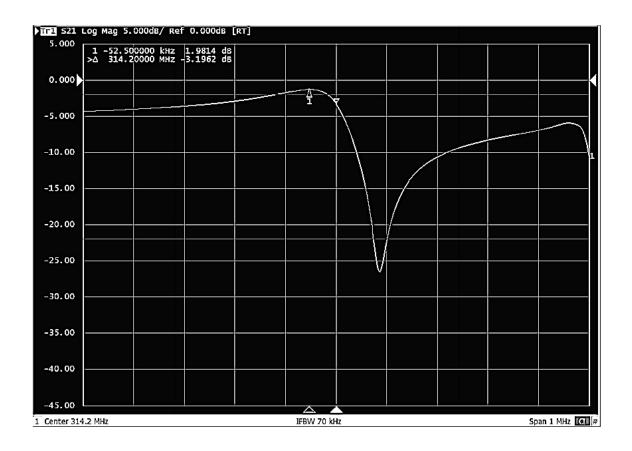


SMD SAW RESONATOR 5035 TYPE SIR SERIES

EQUIVALENT LC MODEL




TEMPERATURE CHARACTERISTICS

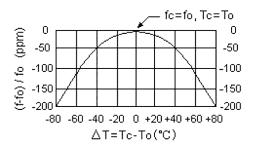


Note: The curve shown above accounts for resonator contribution only and does not include LC component temperature contributions.

PLICTYPCIAL APATION CIRCUITS

Typical Low-power Transmitter Application

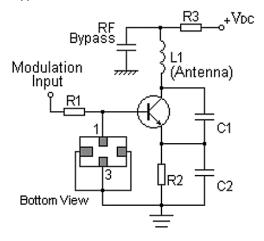

Typical Local Oscillator Application

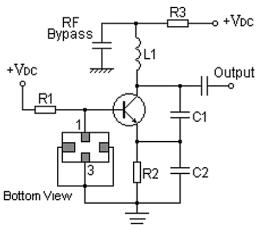

NextGen Components, Inc.



SMD SAW RESONATOR 5035 TYPE SIR SERIES


RELIABILITY

| Test Items | Test Method And Conditions | Requirement |
|------------------------------|--|--|
| Temperature Storage | (1) Temperature: $85^{\circ}C\pm2^{\circ}C$, Duration: 250h, Recovery time: $2h\pm0.5h$ (2) Temperature: $-40^{\circ}C\pm3^{\circ}C$, Duration: 250h, Recovery time: $2h\pm0.5h$ | It shall remain electrical performance |
| Humidity Test | Conditions: 60°C±2°C , 90~95% RH Duration: 250h | after tests |
| Thermal Shock | Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min, Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h. | |
| Vibration Fatigue | Frequency of vibration: 10~55Hz Amplitude:1.5mm Directions: X,Y and Z Duration: 2h | |
| Drop Test | Cycle time: 10 times Height: 1.0m | |
| Solderability | Temperature: 245°C±5°C Duration: 3.0s5.0s Depth: DIP2/3 , SMD1/5 | |
| Resistance to Soldering Heat | (1)Thickness of PCB:1mm , Solder condition: 260°C±5°C , Duration: 10±1s (2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s , Recovery time : 2 ± 0.5h | |




SMD SAW RESONATOR 5035 TYPE SIR SERIES

SUGGESTED REFLOW PROFILE (For Reference Only)

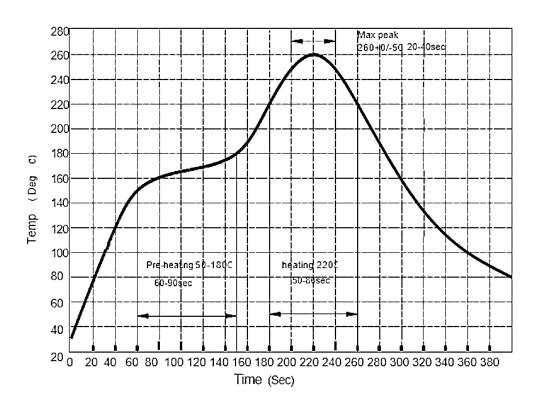

SMD SAW RESONATOR 5035 TYPE SIR SERIES


TAPE DIMENSION (Unit: mm, 1000pcs/Reel)

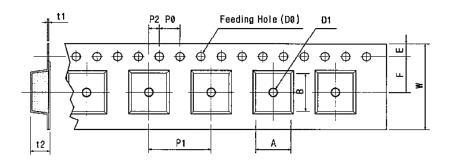


Tape Running Direction

| Code | Dimension |
|------|-------------|
| W | 12.0+/-0.30 |
| F | 5.50+/-0.10 |
| E | 1.75+/-0.10 |
| P 0 | 4.00+/-0.10 |
| P 1 | 8.00+/-0.10 |
| P 2 | 2.00+/-0.10 |
| D 0 | Ø1.5+/-0.10 |
| D 1 | Ø1.5+/-0.25 |
| t 1 | 0.30+/-0.01 |
| t 2 | 1.90+/-0.05 |
| А | 3.70+/-0.10 |
| В | 5.20+/-0.10 |

REEL DIMENSION (Unit: mm)

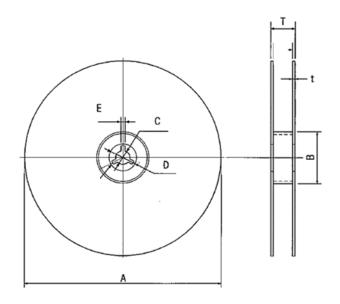

| Code | Dimension |
|------|--------------|
| А | Ø178.0+/-2.0 |
| В | Ø60.0+/-0.5 |
| С | Ø13.0+/-0.5 |
| D | Ø21+/-0.8 |
| E | 2.00+/-0.5 |
| Т | 15.4+/-1.00 |
| t | 0.31 Max. |



SMD SAW RESONATOR 5035 TYPE SIR SERIES

CAUTION

- 1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
- Static voltage between signal load and ground may cause deterioration and destruction of the component.
 Please avoid static voltage.
- Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
- 4. Only leads of component may be soldered. Please avoid soldering another part of component.
- 5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
- 6. The temperature of manual welding should not exceed 300 °C.
- 7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
- 10. For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com.

DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information