

### **SPECIFICATION SHEET**

SPECIFICATION SHEET NO.	Q0528-SIR315M000S041
DATE	May 28, 2023
REVISION	A0
DESCRIPITION	SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads SIR Series
	315.00000MHz, 1-Port, Insertion Loss: 2.0 dB Max.
	Tolerance ±50KHz
	Operating Temp. Range -40°C ~+85°C,
	Reflow Profile Condition 260 °C Max. Tape/Reel, 1000pcs/Reel
	RoHS/RoHS III compliant
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	TGS SIR 315.0ME TLF
PART CODE	SIR315M000S041

#### **VENDOR APPROVE**

Issued/Checked/Approved







DATE: May 28, 2023

C	U	S	T	O	N	1E	R	Α	ıΡ	Ρ	R	O	V	E

DATE:

5/28/2023



### **SMD SAW RESONATOR 5035 TYPE SIR SERIES**

#### **MAIN FEATURE**

- SMD SAW Resonator L5.0\*W3.5\*H1.5mm 5035 Type 4 Pads
- Package Code QCC4A
- One Port SAW Resonator
- Electrostatic Sensitive Device(ESD)
- Low-loss and Short Lead time
- Cross more competitors part
- RoHS/RoHS III compliant

#### APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

#### **PART CODE GUIDE**



SIR	315M000	S	041
1	2	3	4


- 1) SIR: Series Code, SMD SAW Resonator L5.0\*W3.5\*H1.5mm 5035 Type 4 pads
- 2) 315M000: Frequency range code for 315.0000MHz
- 3) S: SMD type, Package Tape/Reel,
- 4) 041: Internal code (A~Z or 1~9 or Blank)

5/28/2023 2

# **SMD SAW RESONATOR 5035 TYPE SIR SERIES**


### **DIMENSION (Unit: mm, Tol.: +-0.15mm)**

#### Image for reference




#### SIR series,

Package Code QCC4A L5.0\*W3.5\*H1.5mm 5035 Type




Pin	Configuration
1	Input/Output
3	Output/Input
2,4	Ground



#### Marking:

Standard + •: Pin 4

#### **Test Circuit**



Rg=Ri=50Ω



### **SMD SAW RESONATOR 5035 TYPE SIR SERIES**

### **ELECTRICAL PARAMETERS**


Parameter	Part No. Symbol	Units	Value			
			Min.	Typical	Max.	
Original Manufacturer	TGS			TGS Crystals		
Holder Type	SIR		SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads			
Frequency Range (f0)	315.0M	MHz	315.0000			
Frequency Tolerance	E	KHz		±50		
Operation Temperance		°C	-40		+85	
Storage Temperance		°C	-55		+125	
DC Voltage		V		±30		
RF Power Dissipation		dBm		10		
Insertion Loss		dB		1.5	2.0	
Quality Factor (Q) @Unload				17396		
Quality Factor (Q) @50 Ω Loaded				2518		
Turnover Temperature		°C	25	40	55	
Frequency Temp. Coefficient		ppm/°C		0.032		
Aging (Absolute Value during the First Year)		ppm/Year		≤±10		
DC Insulation Resistance		ΜΩ	1.0			
RF Equivalent RLC Model @Motional Resistance		Ω		16.9	25.0	
RF Equivalent RLC Model @Motional Inductance		μН		148.8		
RF Equivalent RLC Model @Motional Capacitance		fF		1.72		
Static Capacitance		pF	2.3	2.6	2.9	
Package	Т			Tape/Reel		
RoHS Status	LF		RoHS III compliant			
Add Value			Blank: N/A			
Internal Control Code				Blank: N/A		

Note: 1) Test Temperature:  $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ , Terminating source impedance:  $50\Omega$  Terminating load impedance:  $50\Omega$ 

2) Original Part Number: TGS SIR 315.0ME TLF


5/28/2023 4

www.NextGenComponent.com



### **SMD SAW RESONATOR 5035 TYPE SIR SERIES**

#### **FREQUENCY RESPONSE**

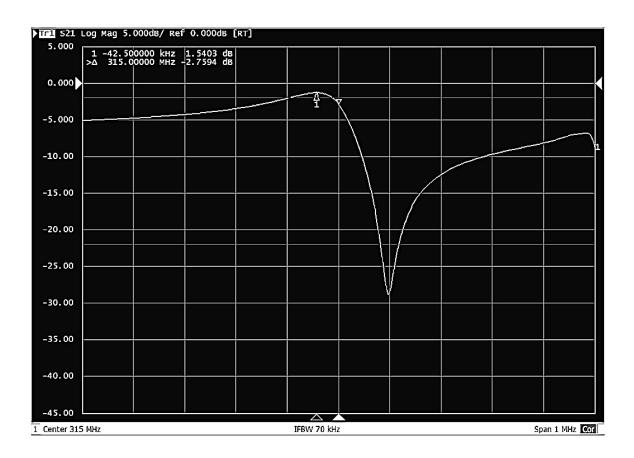


### **SMD SAW RESONATOR 5035 TYPE SIR SERIES**

#### **EQUIVALENT LC MODEL**

### 


#### **TEMPERATURE CHARACTERISTICS**




Note: The curve shown above accounts for resonator contribution only and does not include LC component temperature contributions.

### PLICTYPCIAL APATION CIRCUITS

Typical Low-power Transmitter Application



Typical Local Oscillator Application



NextGen Components, Inc.



# **SMD SAW RESONATOR 5035 TYPE SIR SERIES**


#### **RELIABILITY**

Test Items	Test Method And Conditions	Requirement
Temperature Storage	(1) Temperature: $85^{\circ}C\pm2^{\circ}C$ , Duration: 250h, Recovery time: $2h\pm0.5h$ (2) Temperature: $-40^{\circ}C\pm3^{\circ}C$ , Duration: 250h, Recovery time: $2h\pm0.5h$	It shall remain electrical performance
Humidity Test	Conditions: 60°C±2°C , 90~95% RH Duration: 250h	after tests
Thermal Shock	Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min,  Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h.	
Vibration Fatigue	Frequency of vibration: 10~55Hz Amplitude:1.5mm  Directions: X,Y and Z Duration: 2h	
Drop Test	Cycle time: 10 times Height: 1.0m	
Solderability	Temperature: 245°C±5°C Duration: 3.0s5.0s  Depth: DIP2/3 , SMD1/5	
Resistance to Soldering Heat	(1)Thickness of PCB:1mm , Solder condition: 260°C±5°C ,  Duration: 10±1s  (2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s ,  Recovery time : 2 ± 0.5h	




### **SMD SAW RESONATOR 5035 TYPE SIR SERIES**

### **SUGGESTED REFLOW PROFILE (For Reference Only)**

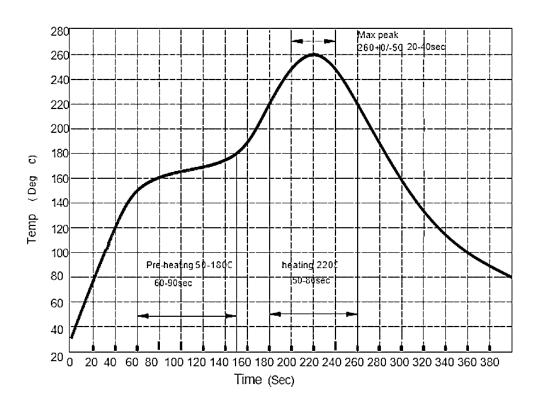

## **SMD SAW RESONATOR 5035 TYPE SIR SERIES**


### TAPE DIMENSION (Unit: mm, 1000pcs/Reel)

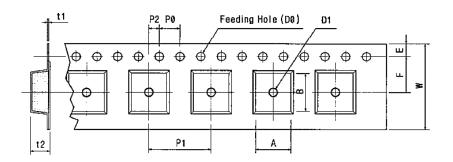

Tape Running Direction

Code	Dimension
W	12.0+/-0.30
F	5.50+/-0.10
E	1.75+/-0.10
P 0	4.00+/-0.10
P 1	8.00+/-0.10
P 2	2.00+/-0.10
D 0	Ø1.5+/-0.10
D 1	Ø1.5+/-0.25
t 1	0.30+/-0.01
t 2	1.90+/-0.05
А	3.70+/-0.10
В	5.20+/-0.10

### **REEL DIMENSION (Unit: mm)**



Code	Dimension
А	Ø178.0+/-2.0
В	Ø60.0+/-0.5
С	Ø13.0+/-0.5
D	Ø21+/-0.8
E	2.00+/-0.5
Т	15.4+/-1.00
t	0.31 Max.



# **SMD SAW RESONATOR 5035 TYPE SIR SERIES**

#### **CAUTION**

- 1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
- 2. Static voltage between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
- Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
- 4. Only leads of component may be soldered. Please avoid soldering another part of component.
- 5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
- 6. The temperature of manual welding should not exceed 300 °C.
- 7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
- 10. For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com.

#### **DISCLAIMER**

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information