

SPECIFICATION SHEET

SPECIFICATION SHEET NO.	Q0528-SIR318M000S041
DATE	May 28, 2023
REVISION	A0
DESCRIPITION	SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads SIR Series
	318.00000MHz, 1-Port, Insertion Loss: 1.8 dB Max.
	Tolerance ±50KHz
	Operating Temp. Range -40°C ~+85°C,
	Reflow Profile Condition 260 °C Max. Tape/Reel, 1000pcs/Reel
	RoHS/RoHS III compliant
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	TGS SIR 318.0ME TLF
PART CODE	SIR318M000S041

VENDOR APPROVE			
lssued/Checked/Approved	Component Mandy Xu ZoV Xo	Compose Ruby Zhang Tolysout	Jack Zhang Toyk-34
DATE: May 28, 2023			
CUSTOMER APPROVE			

DATE:

5/28/2023

1



SMD SAW RESONATOR 5035 TYPE SIR SERIES

MAIN FEATURE

- SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads
- Package Code QCC4A
- One Port SAW Resonator
- Electrostatic Sensitive Device(ESD)
- Low-loss and Short Lead time
- Cross more competitors part
- RoHS/RoHS III compliant

APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

PART CODE GUIDE

SIR	318M000	S	041
1	2	3	4

1) SIR: Series Code, SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 pads

2) 318M000: Frequency range code for 318.0000MHz

3) S: SMD type, Package Tape/Reel,

4) 041: Internal code (A~Z or 1~9 or Blank)





<u> </u>	<u> </u>	4	5		
Rec	que	st Fo	r Q	uota	tion



SMD SAW RESONATOR 5035 TYPE SIR SERIES

DIMENSION (Unit: mm, Tol.: +-0.15mm)


Image for reference





SIR series,

Package Code QCC4A L5.0*W3.5*H1.5mm

5035 Type








Pin	Configuration		
1	Input/Output		
3	Output/Input		
2,4	Ground		



Standard + • : Pin 4

Test Circuit

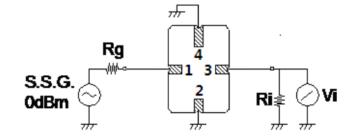



5/28/2023

NextGen Components, Inc.



SMD SAW RESONATOR 5035 TYPE SIR SERIES

ELECTRICAL PARAMETERS

Parameter	Part No. Symbol	Units	Value		
			Min.	Typical	Max.
Original Manufacturer	TGS			TGS Crystals	
Holder Type	SIR		SMD SAW Resonator L5.0*W3.5*H1.5mm 5035 Type 4 Pads		
Frequency Range (f0)	318.0M	MHz		318.0000	
Frequency Tolerance	E	KHz		±50	
Operation Temperance		°C	-40		+85
Storage Temperance		°C	-40		+85
DC Voltage		V		±30	
RF Power Dissipation		dBm		15	
Insertion Loss		dB		1.2	1.8
Quality Factor (Q) @Unload				16461	
Quality Factor (Q) @50 Ω Loaded				1777	
Turnover Temperature		°C			
Frequency Temp. Coefficient		ppm/°C			
Aging (Absolute Value during the First Year)		ppm/Year		≤±10	
DC Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model @Motional Resistance		Ω		12.0	22.0
RF Equivalent RLC Model @Motional Inductance		μH		99.7	
RF Equivalent RLC Model @Motional Capacitance		fF		2.61	
Static Capacitance		pF	3.4	3.7	4.0
Package	Т		Tape/Reel		
RoHS Status	LF		RoHS III compliant		
Add Value			Blank: N/A		
Internal Control Code			Blank: N/A		

Note: 1) Test Temperature: $25^{\circ}C \pm 2^{\circ}C$, Terminating source impedance: 50Ω Terminating load impedance: 50Ω

Original Part Number: TGS SIR 318.0ME TLF

5/28/2023



SMD SAW RESONATOR 5035 TYPE SIR SERIES

FREQUENCY RESPONSE




5/28/2023




TEMPERATURE CHARACTERISTICS

SMD SAW RESONATOR 5035 TYPE SIR SERIES

EQUIVALENT LC MODEL







Note: The curve shown above accounts for resonator contribution only and does not include LC component temperature contributions.

PLICTYPCIAL APATION CIRCUITS

Typical Low-power Transmitter Application




Typical Local Oscillator Application



5/28/2023


NextGen Components, Inc.



SMD SAW RESONATOR 5035 TYPE SIR SERIES


RELIABILITY

Test Items	Test Method And Conditions	Requirement
Temperature Storage	(1) Temperature: 85°C±2°C , Duration: 250h , Recovery time: 2h±0.5h (2) Temperature: –40°C±3°C , Duration: 250h ,Recovery time: 2h±0.5h	It shall remain electrical performance
Humidity Test	Conditions: 60°C±2°C , 90~95% RH Duration: 250h	after tests
Thermal Shock	Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min, Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h.	
Vibration Fatigue	Frequency of vibration: 10~55Hz Amplitude:1.5mm Directions: X,Y and Z Duration: 2h	
Drop Test	Cycle time: 10 times Height: 1.0m	
Solderability	Temperature: 245°C±5°C Duration: 3.0s5.0s Depth: DIP2/3 , SMD1/5	
Resistance to Soldering Heat	 (1)Thickness of PCB:1mm , Solder condition: 260°C±5°C , Duration: 10±1s (2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s , Recovery time : 2 ± 0.5h 	



SMD SAW RESONATOR 5035 TYPE SIR SERIES

SUGGESTED REFLOW PROFILE (For Reference Only)

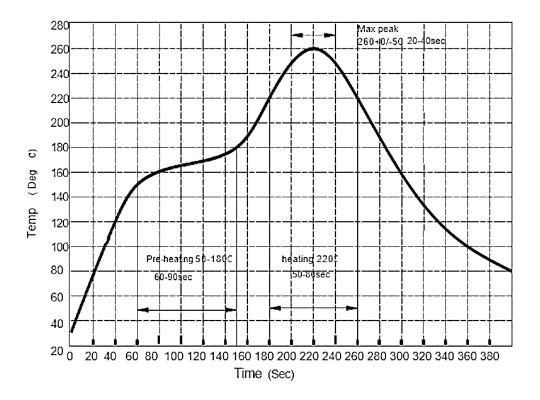


5/28/2023



SMD SAW RESONATOR 5035 TYPE SIR SERIES


TAPE DIMENSION (Unit: mm, 1000pcs/Reel)

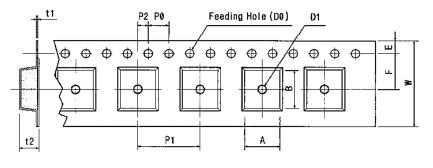

Tape Running Direction

Code	Dimension
W	12.0+/-0.30
F	5.50+/-0.10
E	1.75+/-0.10
P 0	4.00+/-0.10
P 1	8.00+/-0.10
P 2	2.00+/-0.10
D 0	Ø1.5+/-0.10
D 1	Ø1.5+/-0.25
t 1	0.30+/-0.01
t 2	1.90+/-0.05
А	3.70+/-0.10
В	5.20+/-0.10

REEL DIMENSION (Unit: mm)



Code Dimension	
А	Ø178.0+/-2.0
В	Ø60.0+/-0.5
С	Ø13.0+/-0.5
D	Ø21+/-0.8
E	2.00+/-0.5
Т	15.4+/-1.00
t	0.31 Max.

5/28/2023

NextGen Components, Inc.



SMD SAW RESONATOR 5035 TYPE SIR SERIES

CAUTION

- 1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
- Static voltage between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
- Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
- 4. Only leads of component may be soldered. Please avoid soldering another part of component.
- 5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
- 6. The temperature of manual welding should not exceed 300 °C.
- 7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
- 10. For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com.

DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent

accompany the sale of any such product(s) or information 5/28/2023