

## **SPECIFICATION SHEET**

| SPECIFICATION SHEET NO. | Q0526-SDR345M000S013  |
|-------------------------|---|
| DATE                    | May 26, 2023  |
| REVISION                | A0  |
| DESCRIPITION            | SMD SAW Resonator L3.0*W3.0*H1.25mm 3030 Type 6 Pads SDR Series |
|                         | 345.000MHz, 1-Port, Insertion Loss: 2.0 dB Max.                 |
|                         | Tolerance ±100KHz   |
|                         | Operating Temp. Range -40°C ~+85°C,                             |
|                         | Reflow Profile Condition 260 °C Max. Tape/Reel, 3000pcs/Reel    |
|                         | RoHS/RoHS III compliant   |
| CUSTOMER                |   |
| CUSTOMER PART NUMBER    |   |
| CROSS REF. PART NUMBER  |   |
| ORIGINAL PART NUMBER    | TGS SDR 345.0MB TLF   |
| PART CODE               | SDR345M000S013  |

| VENDOR APPROVE          |          |  |                 |
|-------------------------|----------|--|-----------------|
| Issued/Checked/Approved | So mpoor | Compose<br>Compose<br>Call Ruby<br>Zhang<br>Call South | Jack<br>Towpoge |
| DATE: May 26, 2023      |          |  |                 |
|                         |          |  |                 |
| CUSTOMER APPROVE        |          |  |                 |

DATE:

5/26/2023

1

### SMD SAW RESONATOR 3030 TYPE SDR SERIES

### **MAIN FEATURE**

- SMD SAW Resonator L3.0\*W3.0\*H1.25mm 3030 Type 6 Pads
- One Port SAW Resonator
- Electrostatic Sensitive Device(ESD)
- Low-loss and Short Lead time

NextGen

Components,Inc.

- Cross more competitors part
- RoHS/RoHS III compliant

### APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

### PART CODE GUIDE

| SDR | 345M000 | S | 013 |
|-----|---------|---|-----|
| 1   | 2       | 3 | 4   |

1) SDR: Series Code: SMD SAW Resonator L3.0\*W3.0\*H1.25mm 3030 Type 6 Pads

2) 345M000: Frequency range code for 345.0000MHz

- 3) S: SMD type, Package Tape/Reel,
- 4) 013: Internal code (A~Z or 1~9 or Blank)








SMD SAW RESONATOR 3030 TYPE SDR SERIES


### DIMENSION (Unit: mm, Tol.: +-0.15mm)

Image for reference




Marking Standard

SDR series L3.0\*W3.0\*H1.25mm 3030 Type

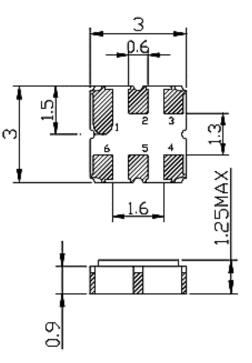

| Pin     | Configuration |
|---------|---------------|
| 2       | Input         |
| 5       | Output        |
| 1,3,4,6 | Ground        |

#### **Test Circuit**

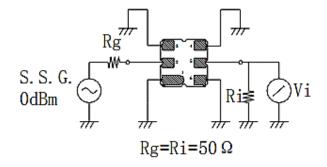

### 5/26/2023

NextGen Components, Inc.



### **SMD SAW RESONATOR 3030 TYPE SDR SERIES**

### **ELECTRICAL PARAMETERS**

| Parameter  | Part No.<br>Symbol | Units    | Value |   |      |
|--|--------------------|----------|-------|---|------|
|  |                    |          | Min.  | Typical                                     | Max. |
| Original Manufacturer                            | TGS                |          |       | TGS Crystals                                |      |
| Holder Type                                      | SDR                |          | L3.0  | D SAW Reson<br>*W3.0*H1.25<br>030 Type 6 Pa | 5mm  |
| Frequency Range (f0)                             | 345.0M             | MHz      |       | 345.0000                                    |      |
| Frequency Tolerance                              | В                  | KHz      |       | ±100  |      |
| Operation Temperance                             |                    | °C       | -40   |   | +85  |
| Storage Temperance                               |                    | °C       | -40   |   | +85  |
| DC Voltage                                       |                    | V        |       | ±30   |      |
| RF Power Dissipation                             |                    | dBm      |       | 15  |      |
| Insertion Loss                                   |                    | dB       |       | 1.2   | 2.0  |
| Quality Factor (Q) @Unload                       |                    |          |       | 16621                                       |      |
| Quality Factor (Q) @50 Ω Loaded                  |                    |          |       | 1917  |      |
| Turnover Temperature                             |                    | °C       |       |   |      |
| Frequency Temp. Coefficient                      |                    | ppm/°C   |       |   |      |
| Aging (Absolute Value during the First Year)     |                    | ppm/Year |       | ≤±10  |      |
| DC Insulation Resistance                         |                    | MΩ       | 1.0   |   |      |
| RF Equivalent RLC Model @Motional Resistance     |                    | Ω        |       | 13.0  | 26.0 |
| RF Equivalent RLC Model @Motional Inductance     |                    | μH       |       | 101.46                                      |      |
| RF Equivalent RLC Model @Motional<br>Capacitance |                    | fF       |       | 2.16  |      |
| Static Capacitance                               |                    | pF       | 2.65  | 2.95  | 3.25 |
| Package  | Т                  |          |       | Tape/Reel                                   |      |
| RoHS Status                                      | LF                 |          | Rc    | HS III complia                              | ant  |
| Add Value  |                    |          |       | Blank: N/A                                  |      |
| Internal Control Code                            |                    |          |       | Blank: N/A                                  |      |

Note: 1) Test Temperature:  $25^{\circ}C \pm 2^{\circ}C$ , Terminating source impedance:  $50\Omega$  Terminating load impedance:  $50\Omega$ 


Original Part Number: TGS SDR 345.0MB TLF

5/26/2023



**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 

### FREQUENCY RESPONSE

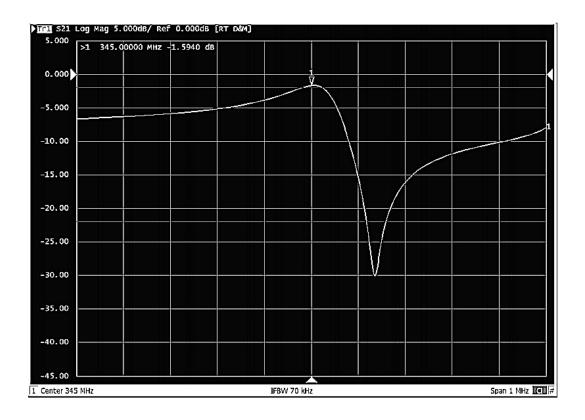


5/26/2023




**TEMPERATURE CHARACTERISTICS** 

**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 

### EQUIVALENT LC MODEL




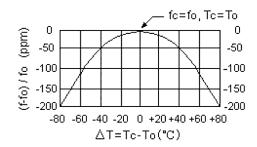


Note: The curve shown above accounts for resonator contribution only and does not include LC component temperature contributions.

### PLICTYPCIAL APATION CIRCUITS

Typical Low-power Transmitter Application

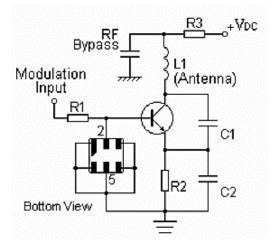

Typical Local Oscillator Application

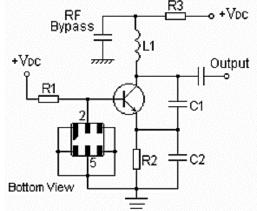

### 5/26/2023

NextGen Components, Inc.



## SMD SAW RESONATOR 3030 TYPE SDR SERIES


#### RELIABILITY

| Test Items                      | Test Method And Conditions  | Requirement                                  |
|---------------------------------|---|--|
| Temperature<br>Storage          | (1) Temperature: 85°C±2°C , Duration: 250h , Recovery time: 2h±0.5h<br>(2) Temperature: –40°C±3°C , Duration: 250h ,Recovery time: 2h±0.5h  | It shall remain<br>electrical<br>performance |
| Humidity Test                   | Conditions: 60°C±2°C , 90~95% RH Duration: 250h   | after tests                                  |
| Thermal Shock                   | Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min,<br>Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h.  |  |
| Vibration Fatigue               | Frequency of vibration: 10~55Hz Amplitude:1.5mm<br>Directions: X,Y and Z Duration: 2h   |  |
| Drop Test                       | Cycle time: 10 times Height: 1.0m   |  |
| Solderability                   | Temperature: 245°C±5°C Duration: 3.0s5.0s<br>Depth: DIP2/3 , SMD1/5   |  |
| Resistance to<br>Soldering Heat | <ul> <li>(1)Thickness of PCB:1mm , Solder condition: 260°C±5°C ,<br/>Duration: 10±1s</li> <li>(2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s ,<br/>Recovery time : 2 ± 0.5h</li> </ul> |  |



**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 

### SUGGESTED REFLOW PROFILE (For Reference Only)

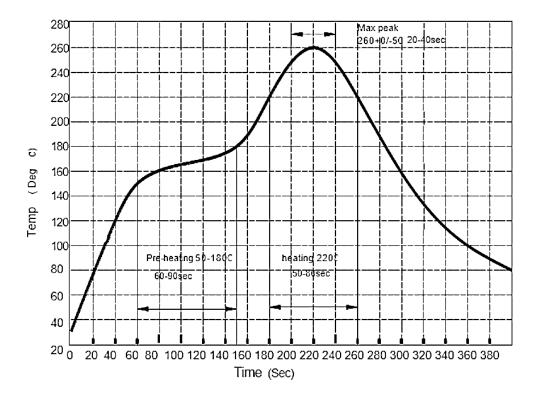


5/26/2023



**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 


### TAPE DIMENSION (Unit: mm, 3000pcs/Reel)

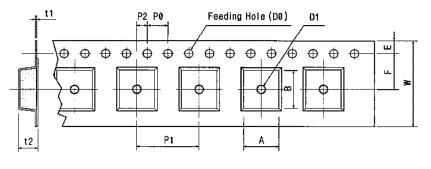

Tape Running Direction

| Code | Dimension   |
|------|-------------|
| W    | 12.0+/-0.30 |
| F    | 5.50+/-0.10 |
| E    | 1.75+/-0.10 |
| P 0  | 4.00+/-0.10 |
| P 1  | 8.00+/-0.10 |
| P 2  | 2.00+/-0.10 |
| D 0  | Ø1.5+/-0.10 |
| D 1  | Ø1.5+/-0.25 |
| t 1  | 0.30+/-0.01 |
| t 2  | 1.90+/-0.05 |
| А    | 3.35+/-0.10 |
| В    | 3.35+/-0.10 |

### **REEL DIMENSION (Unit: mm)**

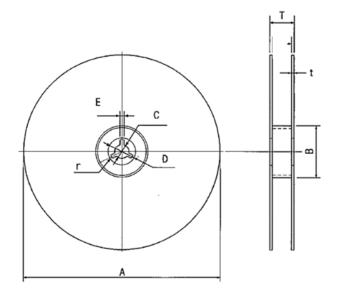

| Code | Dimension   |
|------|-------------|
| А    | Ø330+/-1.0  |
| В    | Ø100+/-0.5  |
| С    | Ø13.0+/-0.5 |
| D    | Ø21+/-0.8   |
| E    | 2.00+/-0.5  |
| Т    | 13.0+/-0.50 |
| t    | 3.00 Max.   |
| r    | 1.00 Max.   |

5/26/2023

NextGen Components, Inc.



### SMD SAW RESONATOR 3030 TYPE SDR SERIES

### CAUTION

- 1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
- Static voltage between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
- Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
- 4. Only leads of component may be soldered. Please avoid soldering another part of component.
- 5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
- 6. The temperature of manual welding should not exceed 300 °C.
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
- 10. For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com.

#### DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent

accompany the sale of any such product(s) or information 5/26/2023