

## **SPECIFICATION SHEET**

SPECIFICATION SHEET NO.	Q0526-SDR916M500S013
DATE	May 26, 2023
REVISION	AO
DESCRIPITION	SMD SAW Resonator L3.0*W3.0*H1.25mm 3030 Type 6 Pads SDR Series
	916.5000000MHz, 1-Port, Insertion Loss: 2.0 dB Max.
	Tolerance ±100KHz
	Operating Temp. Range -40°C ~+85°C,
	Reflow Profile Condition 260 °C Max. Tape/Reel, 3000pcs/Reel
	RoHS/RoHS III compliant
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	TGS SDR 916.5MB TLF
PART CODE	SDR916M500S013

VENDOR APPROVE			
Issued/Checked/Approved	Standy Transferred To mpoor	Compose Ruby Chang Control	Jack Town of the second
DATE: May 26, 2023			
CUSTOMER APPROVE			

DATE:

5/26/2023

1

### SMD SAW RESONATOR 3030 TYPE SDR SERIES

#### MAIN FEATURE

- SMD SAW Resonator L3.0\*W3.0\*H1.25mm 3030 Type 6 Pads
- One Port SAW Resonator
- Electrostatic Sensitive Device(ESD)
- Low-loss and Short Lead time

NextGen

Components,Inc.

- Cross more competitors part
- RoHS/RoHS III compliant

#### APPLICATION

- Bluetooth, wireless communication set
- Communication Electronics

### PART CODE GUIDE

SDR	916M500	S	013
1	2	3	4

1) SDR: Series Code, SMD SAW Resonator L3.0\*W3.0\*H1.25mm 3030 Type 6 Pads

2) 916M500: Frequency range code for 916.500MHz

- 3) S: SMD type, Package Tape/Reel,
- 4) 013: Internal code (A~Z or 1~9 or Blank)








SMD SAW RESONATOR 3030 TYPE SDR SERIES


### DIMENSION (Unit: mm, Tol.: +-0.15mm)

Image for reference




Marking Standard

SDR series L3.0\*W3.0\*H1.25mm 3030 Type

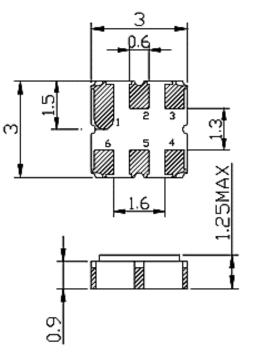

Pin	Configuration
2	Input
5	Output
1,3,4,6	Ground

#### **Test Circuit**



#### 5/26/2023

NextGen Components, Inc.



### **SMD SAW RESONATOR 3030 TYPE SDR SERIES**

#### **ELECTRICAL PARAMETERS**

Parameter	Part No. Units Symbol	Value			
	Symbol		Min.	Typical	Max.
Original Manufacturer	TGS		TGS Crystals		
Holder Type	SDR		SMD SAW Resonator L3.0*W3.0*H1.25mm 3030 Type 6 Pads		
Frequency Range (f0)	916.5M	MHz	916.5000		
Frequency Tolerance	В	KHz		±100	
Operation Temperance		°C	-40		+85
Storage Temperance		°C	-40		+85
DC Voltage		V		±30	
RF Power Dissipation		dBm		15	
Insertion Loss		dB		1.2	2.0
Quality Factor (Q) @Unload				15069	
Quality Factor (Q) @50 Ω Loaded				715	
Turnover Temperature		°C		-	
Frequency Temp. Coefficient		ppm/°C		-	
Aging (Absolute Value during the First Year)		ppm/Year		≤±10	
DC Insulation Resistance		MΩ	1.0		
RF Equivalent RLC Model @Motional Resistance		Ω		4.9	10.0
RF Equivalent RLC Model @Motional Inductance		μH		13.0	
RF Equivalent RLC Model @Motional Capacitance		fF		2.54	
Static Capacitance		pF	2.55	2.85	3.15
Package	Т			Tape/Reel	
RoHS Status	LF		RoHS III compliant		
Add Value				Blank: N/A	
Internal Control Code				Blank: N/A	

Note: 1) Test Temperature:  $25^{\circ}C \pm 2^{\circ}C$ , Terminating source impedance:  $50\Omega$  Terminating load impedance:  $50\Omega$ 


Original Part Number: TGS SDR 916.5MB TLF

5/26/2023



**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 

#### FREQUENCY RESPONSE

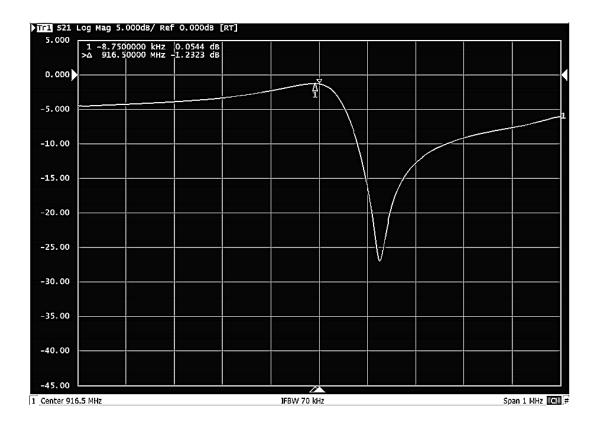


5/26/2023




**TEMPERATURE CHARACTERISTICS** 

**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 

#### EQUIVALENT LC MODEL




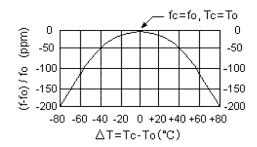


Note: The curve shown above accounts for resonator contribution only and does not include LC component temperature contributions.

#### PLICTYPCIAL APATION CIRCUITS

Typical Low-power Transmitter Application



Typical Local Oscillator Application



#### 5/26/2023

NextGen Components, Inc.



## SMD SAW RESONATOR 3030 TYPE SDR SERIES


#### RELIABILITY

Test Items	Test Method And Conditions	Requirement
Temperature Storage	(1) Temperature: 85°C±2°C , Duration: 250h , Recovery time: 2h±0.5h (2) Temperature: –40°C±3°C , Duration: 250h ,Recovery time: 2h±0.5h	It shall remain electrical performance
Humidity Test	Conditions: 60°C±2°C , 90~95% RH Duration: 250h	after tests
Thermal Shock	Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min, Switch time: ≤3min, Cycle time: 100 times, Recovery time: 2h±0.5h.	
Vibration Fatigue	Frequency of vibration: 10~55Hz Amplitude:1.5mm Directions: X,Y and Z Duration: 2h	
Drop Test	Cycle time: 10 times Height: 1.0m	
Solderability	Temperature: 245°C±5°C Duration: 3.0s5.0s Depth: DIP2/3 , SMD1/5	
Resistance to Soldering Heat	<ul> <li>(1)Thickness of PCB:1mm , Solder condition: 260°C±5°C , Duration: 10±1s</li> <li>(2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s , Recovery time : 2 ± 0.5h</li> </ul>	



SMD SAW RESONATOR 3030 TYPE SDR SERIES

### SUGGESTED REFLOW PROFILE (For Reference Only)

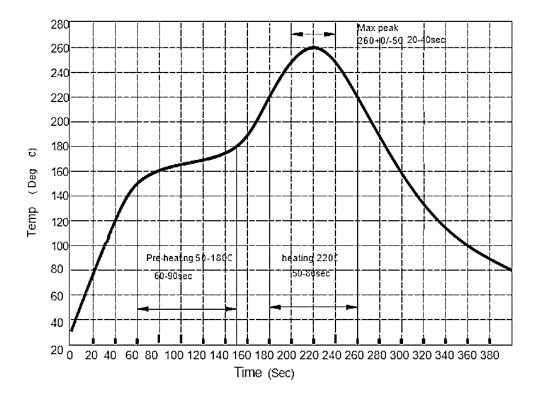


5/26/2023



**SMD SAW RESONATOR 3030 TYPE SDR SERIES** 


### TAPE DIMENSION (Unit: mm, 3000pcs/Reel)

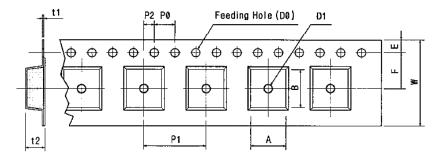

Tape Running Direction

Code	Dimension
W	12.0+/-0.30
F	5.50+/-0.10
E	1.75+/-0.10
P 0	4.00+/-0.10
P 1	8.00+/-0.10
P 2	2.00+/-0.10
D 0	Ø1.5+/-0.10
D 1	Ø1.5+/-0.25
t 1	0.30+/-0.01
t 2	1.90+/-0.05
А	3.35+/-0.10
В	3.35+/-0.10

**REEL DIMENSION (Unit: mm)** 



Code	Dimension
А	Ø330+/-1.0
В	Ø100+/-0.5
С	Ø13.0+/-0.5
D	Ø21+/-0.8
E	2.00+/-0.5
Т	13.0+/-0.50
t	3.00 Max.
r	1.00 Max.

5/26/2023

NextGen Components, Inc.



### **SMD SAW RESONATOR 3030 TYPE SDR SERIES**

#### CAUTION

- 1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to ESD protect in the test.
- Static voltage between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
- Ultrasonic cleaning may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
- 4. Only leads of component may be soldered. Please avoid soldering another part of component.
- 5. There is a close relationship between the device's performance and matching network. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.
- 6. The temperature of manual welding should not exceed 300 °C.
- 7. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- 9. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) perse, not for applications, processes and circuits implemented within components or assemblies.
- 10. For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com.

#### DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent

accompany the sale of any such product(s) or information 5/26/2023