

### **SPECIFICATION SHEET**

	,	
SPECIFICATION SHEET NO.	Q0524-FF10M70000S0A5	
DATE	May 24, 2023	
REVISION	A1	
DESCRIPITION	SMD MHz Ceramic Filter, L3.45*W3.1*H1.4mm, 4 Pads, CF33 Series,	
	A5 Type, 10.700MHz, 3dB Band Width: 280+/-50KHz,	
	Insertion Loss: 3.0+/-2.0dB. Impedance: 330 ohm	
	Operating Temp. Range -20°C ~+80°C,	
	Packed in Tape/Reel,	
	RoHS/RoHS III compliant	
CUSTOMER		
CUSTOMER PART NUMBER		
CROSS REF. PART NUMBER		
ORIGINAL PART NUMBER	TGS CF33 10.7MA5 TLF	
PART CODE	FF10M70000S0A5	

### **VENDOR APPROVE**

Issued/Checked/Approved







DATE: May 24, 2023

CUSTOWER APPROVE						

DATE:

5/24/2023



### **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**

#### MAIN FEATURE





- SMD MHz Ceramic Filter, L3.45\*W3.1\*H1.4mm, 4 Pads
- Low cost & short lead time.
- Cross more competitors part SFECF Series
- RoHS/RoHS III compliant

#### **APPLICATION**

• Communication Electronics and more

#### **PART CODE GUIDE**



FF	10M70000	S	0A5
1	2	3	4

- 1) FF: Part family Code for SMD MHz Ceramic Filter, L3.45\*W3.1\*H1.4mm, 4 Pads, CF33 series
- 2) 10M70000: Frequency range code for 10.70000MHz
- 3) S: Packed in Tape/Reel
- 4) 0A5: Specification code for original Part No. TGS CF33 10.7MA5 TLF




## **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**


### **DIMENSION (Unit: mm)**


### Image for reference




**CF33** 










- (1): Input
- (2): Ground
- (3) Float (Signal Line)
- (4) Output

3



# **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**

#### **ELECTRICAL PARAMETERS**

Paramete	r	Part No.	Units	Value			Condition
		Symbol		Min.	Typical	Max.	
Original M	lanufacturer	TGS	TGS Crystals				
Holder Typ	pe	CF33	SMD MHz Ceramic Filter, L3.45*W3.1*H1.4mm, 4 Pads				
Center Fre	equency (f0)	10.7M	MHz	10.7000			@+/-30KHz
Bandwidtl	h	A5	kHz	230	280	330	@3 dB
Bandwidtl	h		kHz	-		590	@20 dB
Ripple			dB			1.0	within 3dB bandwidth
Insertion l	Loss		dB	1.0	3.0	5.0	@Min.loss point
Temp. Characteristic			%			±0.5	@-20°C ~ +80°C
Spurious F	Response		dB	30			@9.0 ~ 12.0MHz
Input/Out			Ω		330		
Insulation Resistance			МΩ	100			@ 10V 1 min.
Withstand DC Voltage			V			50	@ DC, 1 min
Operating Temp. Range			°C	-20		+80	
Storage Te	emp. Range		°C	-40		+85	
Package T			Packed in Tape/Reel				
	RoHS Status	LF		RoHS III compliant			
Others	Add Value		N/A				
	Internal Control Code *		N/A				

Note: Original Part Number: TGS CF33 10.7MA5 TLF


5/24/2023



# **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**

### **RELIABILITY**


KELIABILITY		
Test Items	Test Method And Conditions	Requirement
Humidity	After being placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall fulfill Table 1.
High Temperature	After being placed in a chamber with 85±2 °C, for 96 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall fulfill Table 1.
Low Temperature	After being placed in a chamber with -40±2 °C, for 96 hours and then being placed in room temperature for 1 hour, filter shall be measured.	It shall fulfill Table 1.
Temperature Cycling	After temperature cycling of blow table was performed 5 times, Filter shall be measured after being placed in natural conditions for 1h.  Temp.: -20±3°C, Time: 30±3 min; Temp.: -80±3°C, Time: 30±3 min.	It shall fulfill Table 1.
Vibration	Subject the filter to vibration for 2h.Each in x y and z axis with the amplitude of 1.5mm, The frequency shall be varied uniformly between the limits of 10Hz-55Hz-10Hz and then filter shall be measured.	It shall fulfill Table 1.
Mechanical Shock	Filter shall be measured after 3 times random dropping from the height of 1m on the wooden plate.	No visible damage. it shall fulfill Table 1
Soldering Test	Passed through the reflow oven under the following condition, and left at room temp. for 24 hours before measurement.	It shall fulfill Table 1.
Solderability	Dipped in 235°C±5°C solder bath for 3s±0.5s with rosin flux (25wt% ethanol solution.)	The terminals shall be at least 95% covered by solder.
Board Bending	Mount on a glass-epoxy board(width =50mm, thickness=1.6mm),then bend it to 1mm displacement(velocity= 1mm/s) and keep it for 5s.	Mechanical damage such as break shall not occur




### **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**

### Table 1

Test Items	Characteristics after test		
Center Frequency Drift	±30 kHz Max.		
Insertion Loss Drift	±2.0 dB Max.		
3dB Bandwidth Drift	±25 kHz Max.		
20dB Bandwidth Drift	±60 kHz Max.		
Note: The limits in the above table are referenced to the initial measurements.			

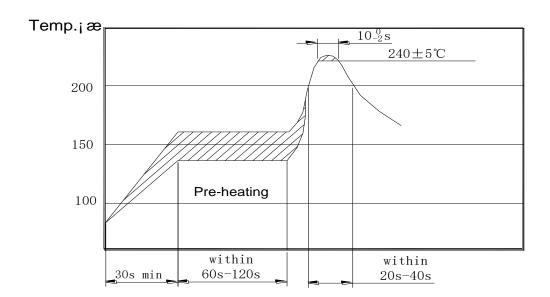




**Soldering Test** 

**Board Bending** 

# SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE

### **TEST CIRCUIT (For Reference Only)**

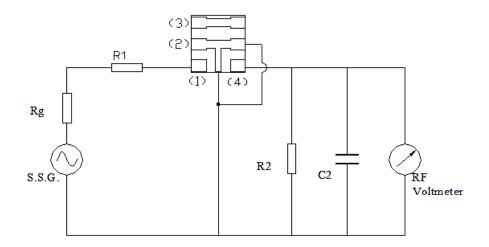

R1=280 $\Omega$  (1±5%,) R2= 330 $\Omega$ (1±5%,) Rg=50 $\Omega$ 

C2=10pF(Including stray capacitance and input capacitance of RF voltmeter),

S.S.G: Output Voltmeter


1: Input 2: Ground 3: Float 4: Output

#### Note:


Parts shall be tested under the condition (Temp.: 20±15°C,Humidity 65±20% R.H.) unless the standard condition(Temp.: 25±3 °C, Humidity : 65±10% R.H.) is regulated to measure.

### **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**

### RECOMMENDED REFLOW SOLDERING STANDARD CONDITION

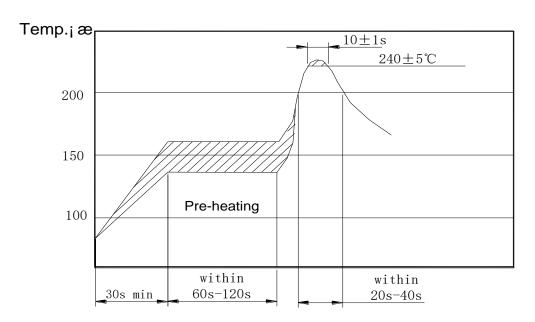


#### **RECOMMENDED LAND PATTERN**




- (1): Input
- (2): Ground
- (3) Float (Signal Line)
- (4) Output


### **SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE**

### **TPAE/REEL DIMENSIONS (mm)**



фА	фВ	W	T	Pieces per reel	Carrier tape size
$180 \pm 3$	60min	12.4min	19.4max	1000 typ.	12

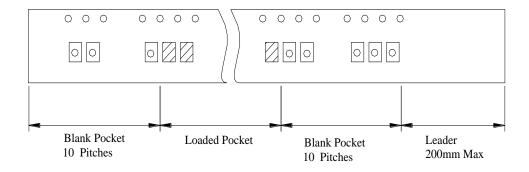

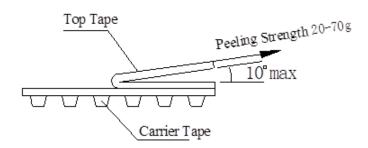

5/24/2023



### SMD MHZ CERAMIC FILTER CF33 SERIES A5 TYPE

#### **NOTES**

- Don't apply excess mechanical stress to the component and terminals at soldering. Do not use this product with bend.
- Do not clean or wash the component for it is not hermetically sealed.
- Do not use strong acidity flux, more than 0.2wt% chlorine content, in flow soldering.
- Don't be close to fire.
- This specification mentions the quality of the component as a single unit. Please insure the component is thoroughly evaluated in your application circuit
- Expire date (Shelf life) of the products is 12 months after delivery under the conditions of a sealed and an unopened package. Please use the products within 12 months after delivery. If you store the products for a long time (more than 12 months), use carefully because the products may be degraded in the solder-ability or rusty. Please confirm solder-ability and characteristics for the products regularly.
- Exposure components under soldering condition that is exceeding our recommendation will increase the failure dangerous.
- Please contact us before using the product as automobile electronic component.
- Please return one of these specifications after your signature of acceptance.
- When something gets doubtful with this specifications, we shall jointly work to get an agreement.
- For questions on technology, prices and delivery, please contact our sales offices or e-mail: sales@NextGenComponent.com .

#### **DISCLAIMER**

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information