

|                                  |   |  |
|----------------------------------|---|--|
| SPECIFICATION SHEET NO.          | S1120 – BDSHA000000S00  |  |
| ORIGINAL MFG/PART NO.            | Oriental Technology (BND) / BDS-HA-000000   |  |
| NEXTGEN PART CODE                | BDSHA000000S00  | Indicate This Orderable Code For <a href="#">RFQ</a> / Order |
| DATE                             | Nov. 20, 2025   |  |
| REVISION                         | A6  | Updated With Most Recent Data                                |
| DESCRIPTION AND MAIN PARAMETRICS | <p>Automotive PLCC-6 TOP LED SMD 3433 0.5W Amber Color, BDSH Series<br/> L3.40*W3.30*H1.90mm, Colorless &amp; Clear Lens Transparency,<br/> 2.6mm Dia. Viewing Angle 120°, Lens Round with Flat Top<br/> Forward Voltage (VF) 1.9~2.65V<br/> Dominant Wavelength Rank (DWL) 612~624nm<br/> Luminous Intensity Rank (IV) 14~38 lm<br/> Operating Temp. Range -40°C ~+110°C, Package in Tape/Reel, 1000pcs/Reel<br/> RoHS/RoHS III compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863) and Halogen Free (HF)</p> |  |
| CUSTOMER                         |   |  |
| CUSTOMER PART NUMBER             |   |  |
| CROSS REF. PART NUMBER           |   |  |
| MEMO                             |   |  |

|                               |   |  |   |
|-------------------------------|---|--|---|
| <b>VENDOR APPROVE</b>         |   |  |   |
| Issued/Checked/Approved       |  |  |  |
| Effective Date: Nov. 20, 2025 |   |  |   |

|                         |  |
|-------------------------|--|
| <b>CUSTOMER APPROVE</b> |  |
|                         |  |
| Date:                   |  |

## MAIN FEATURE

- Amber Color PLCC-6 Package
- Luminous Intensity@140mA: 14~38 lm
- Emitting Material: InGaAlP Chip
- View Angle at 50% Iv of 120°
- Corrosion Robustness: Excellent Corrosion Robustness
- Suitable for SMT process
- Meet MSL 1 Requirement
- Cross Competitors Parts and More.
- RoHS/RoHS III compliant, RoHS Annex III lead Exemption (Exempt per RoHS EU 2015/863)



*Image shown is a representation only. Exact specifications should be obtained from the product dimension.*

## APPLICATION

- Auto Signaling
- Auto Lighting Interior and Exterior
- Signal and Symbol Luminary



## ELECTRICAL CHARACTERISTICS

- See Page 6 ~ Page 7.
- All Products Parameters are Subject To NextGen Components' Final Confirmation.

**HOW TO ORDER**

- Please Follow Up Part Code Guide And Indicate NextGen Part Code BDSHA000000S00 For RFQ and Order.

**PART CODE GUIDE**


**RFQ**  
Request For Quotation

| CODE | NAME                           | KEY SPECIFICATION OPTION  |
|------|--------------------------------|---|
| BDSH | Product Series Code            | Automotive SMD LED PLCC-6 with lens 120° Package 3433, 0.5W<br>Lens Round with Flat Top, Dimension L3.40*W3.30*H1.90mm  |
| A    | Color Code                     | A: Amber Color  |
| 00   | Forward Voltage Rank (VF)      | Custom letter A~Z, a-z or digits (0-9)<br>00: 1.9V ~2.65V; V1: 1.9V ~2.05V; V2: 2.05V ~2.2V;<br>V3: 2.2V ~2.35V; V4: 2.35V ~2.5V; V5: 2.5V~2.65V                        |
| 00   | Dominant Wavelength Rank (DWL) | Custom letter A~Z, a-z or digits (0-9)<br>00: 612nm~ 624nm; WE: 612nm~ 616nm WF: 616nm~<br>620nm WG: 620nm~ 624nm   |
| 00   | Luminous Intensity Rank (IV)   | Custom letter A~Z, a-z or digits (0-9)<br>00: 14 lm ~38 lm; LA: 14 lm~18 lm; LB: 18 lm ~22lm<br>L1: 22 lm ~26 lm; L2: 26 lm ~30 lm; L3: 30 lm ~34lm<br>L4: 34 lm ~38 lm |
| S00  | Internal Control Code          | Custom letter A~Z, a-z or digits (0-9)  |
| XX   | Special/Custom Parameters      | Blank: N/A;<br>XX: Letter A~Z, a~z or digits (0~9) for Special/Custom<br>Parameters   |


DIMENSION -- Unit: (mm), Case 3433 Outline, Tolerance: +/-0.05mm)

- Lens Round with Flat Top, L3.40\*W3.30\*H1.90mm, Appro. Weight: 40mg each


Top View

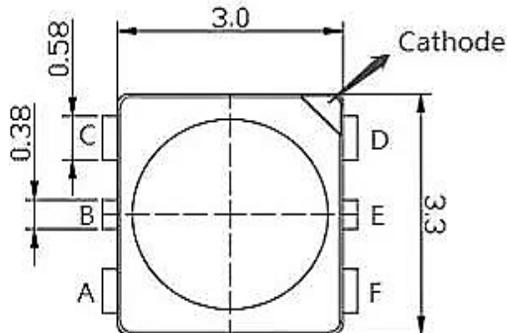


Side View

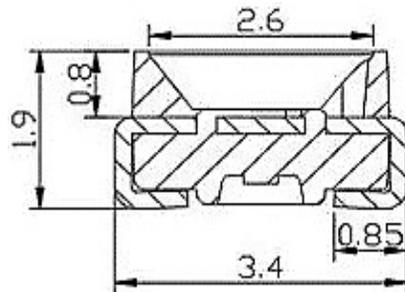


Side View



Circuit

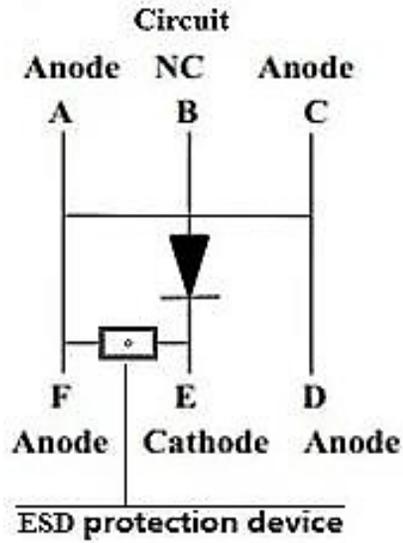

Recommend Pad Layout (Unit: mm, Tolerance: +/-0.1mm)

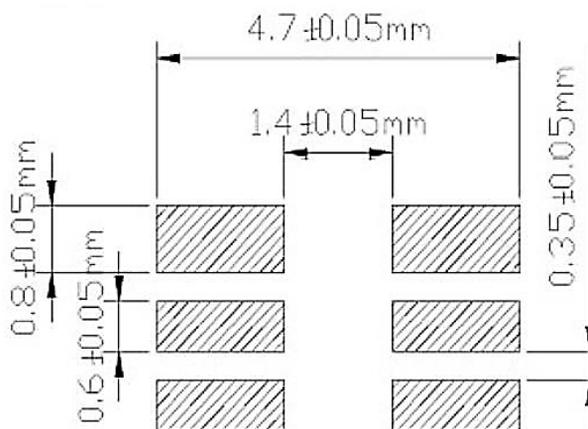

**MAXIMUM RATINGS**  $T_s=25^{\circ}\text{C}$ , RH60%

| PARAMETERS   | SYMBOL | VALUES               | UNIT               |
|--|--------|----------------------|--------------------|
| Operating Temperature  | Top    | -40~+110             | $^{\circ}\text{C}$ |
| Storage Temperature  | Tstg   | -40~+110             | $^{\circ}\text{C}$ |
| Junction Temperature   | Tj     | 125                  | $^{\circ}\text{C}$ |
| Forward Current ( $T_s=25^{\circ}\text{C}$ )                                       | IF     | 200                  | mA                 |
| Surge Current<br>( $t \leq 10\mu\text{s}$ ; $D=0.005$ ; $T_s=25^{\circ}\text{C}$ ) | IFs    | 350                  | mA                 |
| Reverse Voltage ( $T_s=25^{\circ}\text{C}$ )                                       | VR     | Not for Reverse Bias | V                  |
| Electrostatic Discharge<br>(acc.to ANSI/ESDA/JEDEC JS-001-2017)                    | VESD   | $\geq 8$             | kV                 |

**OPTICAL & ELECTRICAL CHARACTERISTICS**  $I_F=140\text{mA}$ ,  $T_s=25^{\circ}\text{C}$ , RH60%

| PARAMETERS  | SYMBOL                              | VALUES |      |      | UNIT          |
|---|-------------------------------------|--------|------|------|---------------|
|   |                                     | MIN.   | TYP. | MAX. |               |
| Peak Wavelength   | $\lambda_{\text{peak}}$             | -      | 625  | -    | nm            |
| Dominant wavelength   | $\lambda_{\text{dom}}$              | 612    | -    | 624  | nm            |
| Luminous Intensity @140mA   | IV                                  | 14     | -    | 38   | lm            |
| Spectral bandwidth at 50% IV  | $\Delta\lambda$                     | -      | 16   | -    | nm            |
| Viewing Angle   | $2\theta_{1/2}$                     | -      | 120  | -    | Deg           |
| Forward Voltage   | V <sub>F</sub>                      | 1.9    | 2.3  | 2.65 | V             |
| Reverse Current   | I <sub>R</sub> (V <sub>R</sub> =5V) | -      | 0.2  | 10   | $\mu\text{A}$ |
| Thermal Resistance<br>junction/solder point   | R <sub>th(j-sp)real</sub>           | -      | 55   | 64   | K/W           |
| Electrical Thermal Resistance<br>junction/solder point with<br>efficiency $\eta=31\%$ | R <sub>th(j-sp)elec</sub>           | -      | 38   | 48   | K/W           |

ELECTRICAL CHARACTERISTICS IF=140mA, Ts=25°C, RH60%

| Part Code      | Forward Voltage - VF<br>(V) | Dominant Wavelength- DWL<br>(nm) | Luminous Intensity- IV<br>(lm) |
|----------------|-----------------------------|----------------------------------|--------------------------------|
| BDSHA000000S00 | 1.9~2.65                    | 612~624                          | 14~38                          |

BIN CODE LIST

| PARAMETERS  | SYMBOL | VALUES   | TOLERANCE | UNIT |
|---|--------|----------|-----------|------|
| Forward Voltage Rank (VF)<br>@IF=140mA, Ts=25°C,<br>RH60%   | 00     | 1.9~2.65 | ±0.05     | V    |
|   | V1     | 1.9~2.05 |           |      |
|   | V2     | 2.05~2.2 |           |      |
|   | V3     | 2.2~2.35 |           |      |
|   | V4     | 2.35~2.5 |           |      |
|   | V5     | 2.5~2.65 |           |      |
| Dominant Wavelength Rank- DWL<br>@IF=140mA, Ts=25°C, RH60%  | 00     | 612~624  | ±1.5      | nm   |
|   | WE     | 612~616  |           |      |
|   | WF     | 616~620  |           |      |
|   | WG     | 620~624  |           |      |
| Luminous Intensity Rank- IV<br>@IF=140mA, Ts=25°C,<br>RH60% | 00     | 14~38    | ±5.0%     | lm   |
|   | LA     | 14~18    |           |      |
|   | LB     | 18~22    |           |      |
|   | L1     | 22~26    |           |      |
|   | L2     | 26~30    |           |      |
|   | L3     | 30~34    |           |      |
|   | L4     | 34~38    |           |      |

OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=140mA, Ts=25°C, RH60%

Figure 1. Relative Spectral Emission,  $I_{rel}=f(\lambda)$ ,  $\Phi_{rel} = f(\lambda)$ ; Tj = 25 ° C; IF= 140mA


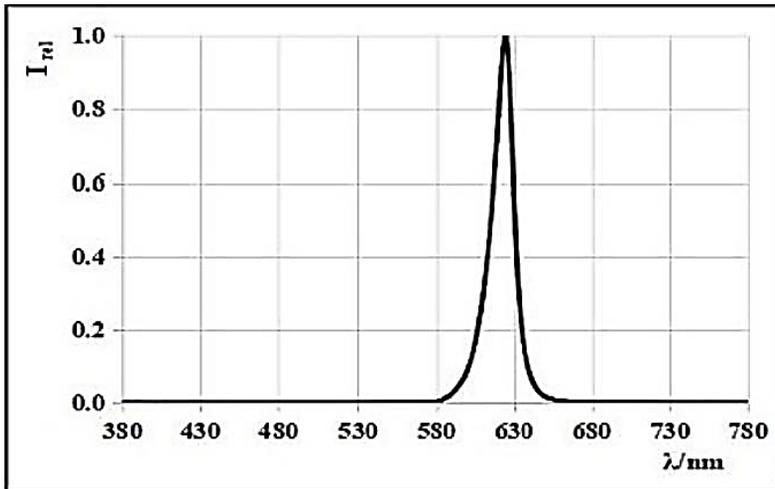


Figure 2. Forward Current Vs. Relative Intensity,  $\Phi_V/\Phi_V(140mA)= f(I_F)$

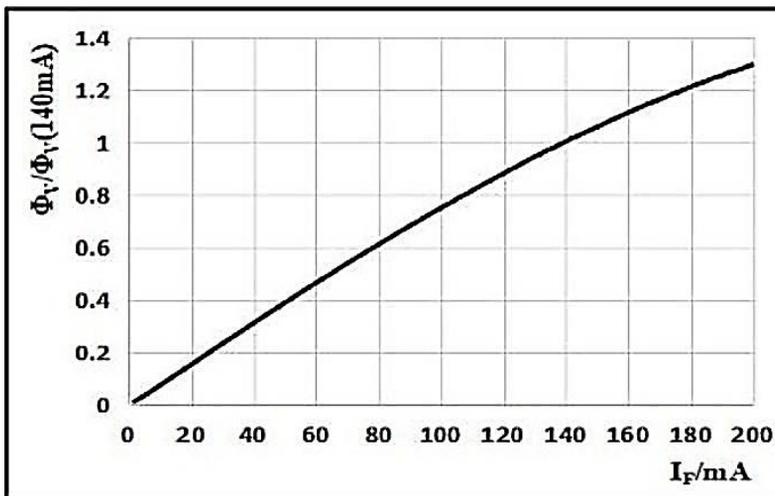

OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=140mA, Ts=25°C, RH60%

Figure 3. Forward Voltage Vs. Forward Current, IF = f (VF)

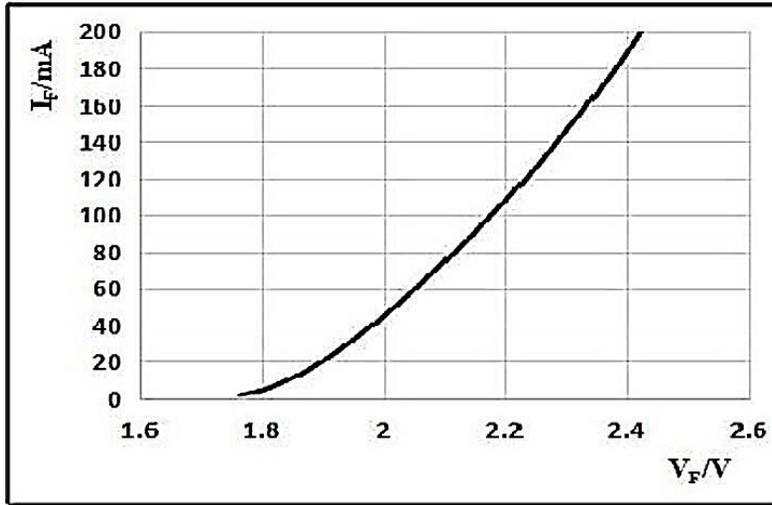


Figure 4. Junction Temperature Vs. Relative Intensity



OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=140mA, Ts=25°C, RH60%

Figure 5. Junction Temperature Vs.  $\Delta V_f$ ,  $\Delta V_f = V_f - V_f(25^\circ\text{C}) = f(T_j)$

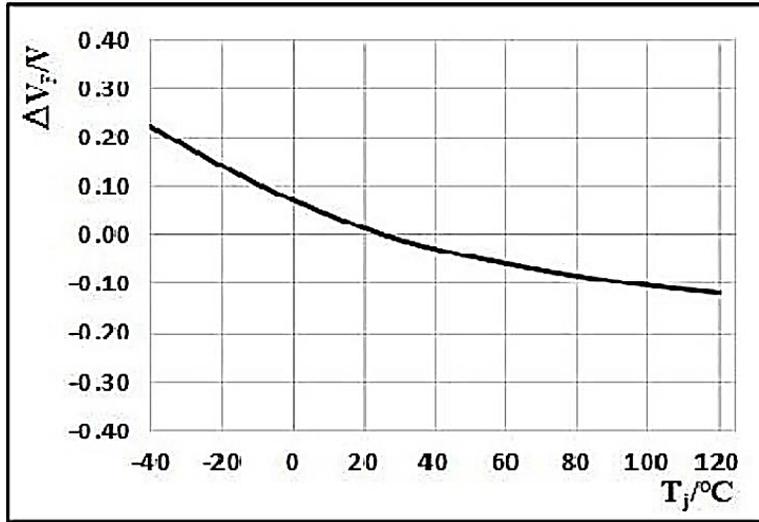


Figure 6. Junction Temperature Vs.  $\Delta \lambda_{\text{dom}}$ ,  $\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j)$



OPTICAL & ELECTRICAL CHARACTERISTICS CURVES -IF=140mA, Ts=25°C, RH60%

Figure 7 Ts Vs. Max. Permissible IF, IF = f(Ts )



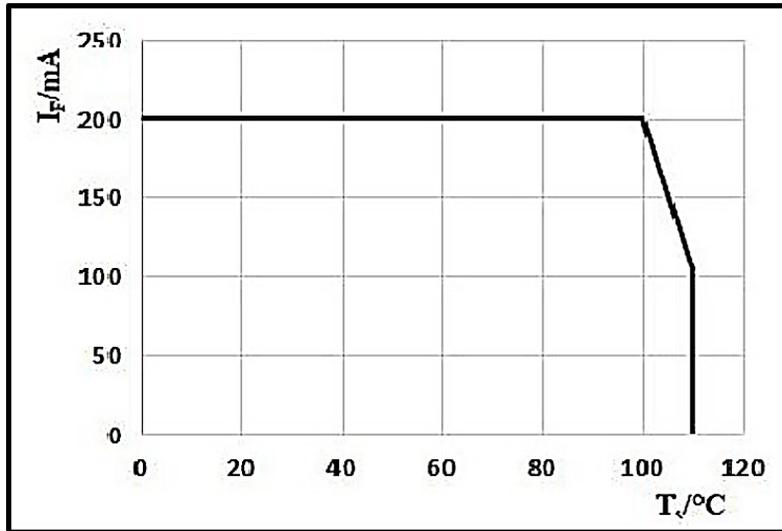


Figure 8. Radiation Diagram, I rel = f (Φ)

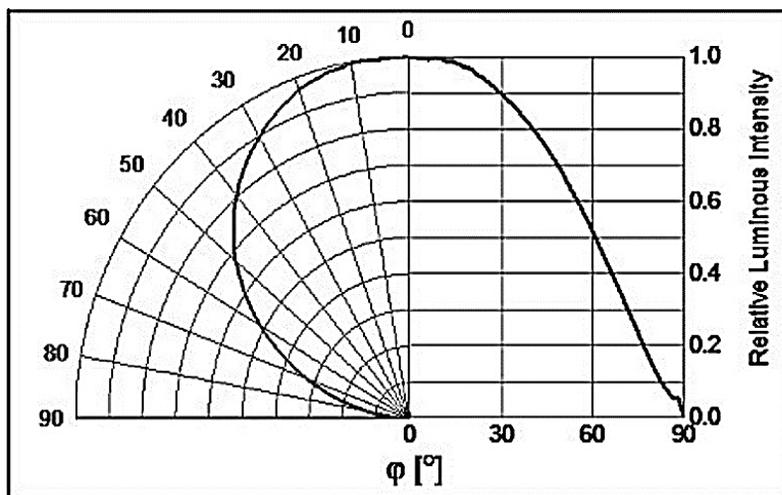

**REFLOW SOLDERING CHARACTERISTICS**

Product complies to MSL Level 2a acc. To JEDEC J-STD-020 D.01

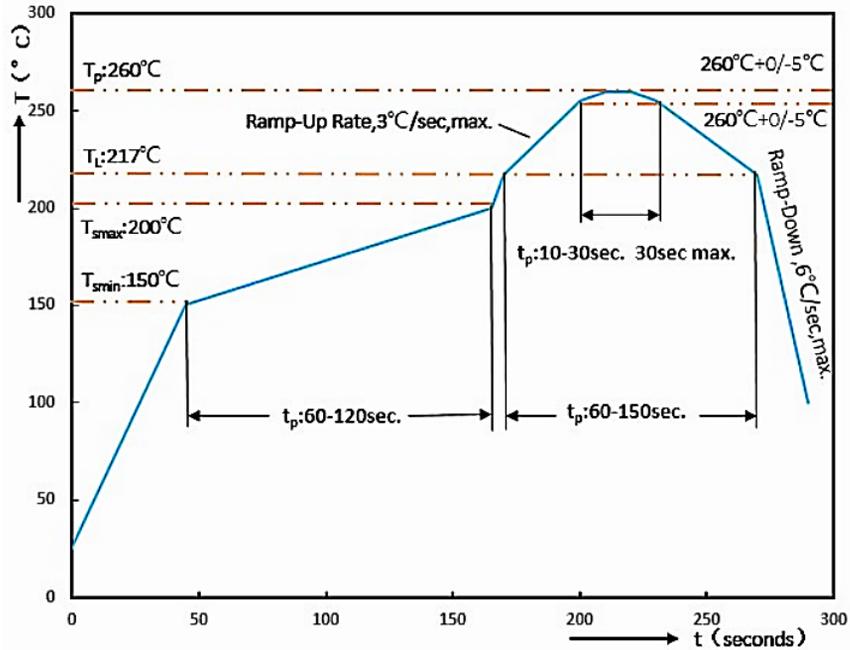


| PROFILE FEATURE                                 |                           | PB-FREE ASSEMBLY  |
|---|---------------------------|-------------------|
| Average Ramp-up Rate (Ts Max to Tp)             |                           | 3°C/second Max    |
| Preheat   | Temperature Min (Ts Min.) | 150°C             |
|   | Temperature Max (Ts Max.) | 200°C             |
|   | Time (ts Min. to ts Max.) | 60 ~ 120 seconds  |
| Time maintained above                           | Temperature (TL)          | 217°C             |
|   | Time (tL)                 | 60 ~ 150 seconds  |
| Peak/Classification Temperature (Tp)            |                           | 260 °C            |
| Time within 5°C of actual Peak Temperature (tp) |                           | 30 seconds Max    |
| Ramp-down rate                                  |                           | 6 °C /Second Max. |
| Time 25 °C to Peak Temperature                  |                           | 8 minutes Max.    |
| Suggest reflow times                            |                           | 3 Times Max.      |


TAPE/REEL, 1000pcs/Reel (Unit: mm)

- All Devices are packed in accordance with EIA standard RS-481-A
- Cumulative Tolerance : Cumulative Tolerance/10 pitches to be  $\pm 0.2\text{mm}$
- Adhesion Strength of Cover Tape Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of  $10^\circ$  to the carrier tape.
- Moisture Resistant Package

Tape

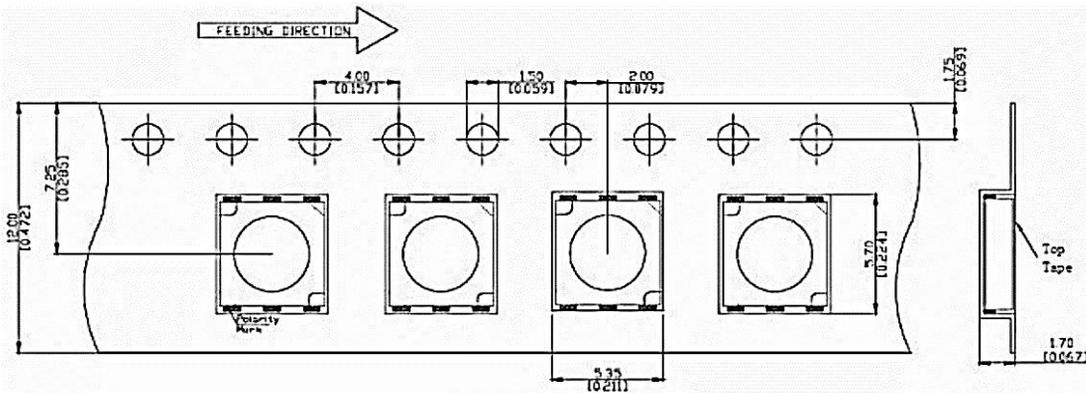

Reel

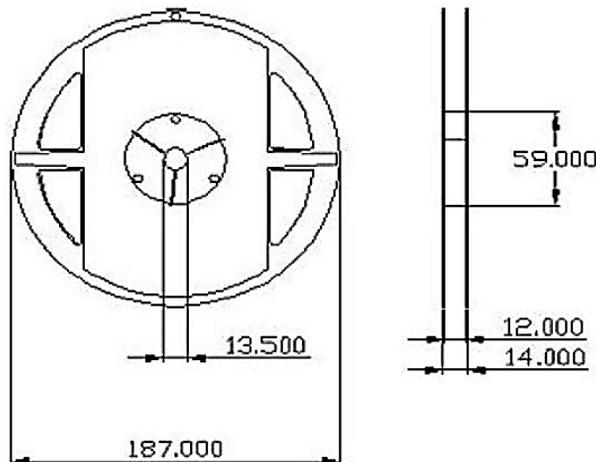

#### APPLICATION NOTES - Part I

- Storage: To avoid the moisture penetration, we recommend store in a dry box with a desiccant, The maximum storage temperature range is 40°C and a maximum humidity of RH60%.
- Use Precaution after Opening the Packaging: Recommend conditions after opening the package  
*a) Sealing b) Temperature : 30°C Humidity: Less than RH50% c) Recommend to use up before 72hrs after opening the package.*
- If the package has been opened more than 4 weeks(MSL\_2a) or the color desiccant changes, LED Components should be dried for 12hrs at 60±5°C. .
- Do not apply mechanical force or excess vibration during the cooling process to normal temperature after soldering.
- Do not rapidly cool device after soldering.
- The LED should not be mounted on warped portion of PCB.
- The LED should not be used in any type of fluid such as water, oil, organic solvent and etc. When washing is required, IPA (Isopropyl Alcohol) should be used.
- When the LEDs are in operation the maximum current should be decided after measuring the package temperature.
- Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.
- The driving circuit must be designed to allow forward voltage only when it is ON or OFF. If the reverse voltage is applied to LED, migration can be generated resulting in LED damage.
- LEDs are sensitive to Electro-Static Discharge (ESD). Below is a list of suggestions that BND purposes to minimize these effects.
- The products are sensitive to static electricity or surge voltage. ESD can damage a die and it's Reliability. When handing the products, the following measures against electrostatic discharge are strongly recommended:

## APPLICATION NOTES - Part II

- a) Increase in reverse leakage current lowered turn-on voltage
- b) Abnormal emissions from the LED at low current LED

The following recommendations are suggested to help minimize the potential for an ESD event.

- One or more recommended work area suggestions:
  - a) Dissipating static charge with conductive materials
  - b) Preventing charge generation with moisture
  - c) ESD safe storage containers ESD
  
- One or more personnel suggestion options:
  - a) Antistatic wrist-strap b) Antistatic material shoes c) Antistatic clothes
  
- Environmental controls: Humidity control (ESD gets worse in a dry environment).
  
- Handling Precautions: During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound. In general, LEDs should only be handled from the side. By the way, this also applies to LEDs Without a silicone sealant, since the surface can also become scratched.
  
- NextGen suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Please do not mold this products into another resin (epoxy, urethane, etc.) and do not handle this Product with acid or sulfur material in sealed space.

The following recommendations are suggested to help minimize the potential for an ESD event.

- One or more recommended work area suggestions:
  - a) Dissipating static charge with conductive materials
  - b) Preventing charge generation with moisture
  - c) ESD safe storage containers ESD
  
- One or more personnel suggestion options:
  - a) Antistatic wrist-strap b) Antistatic material shoes c) Antistatic clothes
  
- Environmental controls: Humidity control (ESD gets worse in a dry environment)

## APPLICATION NOTES - Part II

- a) Increase in reverse leakage current lowered turn-on voltage
- b) Abnormal emissions from the LED at low current LED

The following recommendations are suggested to help minimize the potential for an ESD event.

- One or more recommended work area suggestions:
  - a) Dissipating static charge with conductive materials
  - b) Preventing charge generation with moisture
  - c) ESD safe storage containers ESD
  
- One or more personnel suggestion options:
  - a) Antistatic wrist-strap b) Antistatic material shoes c) Antistatic clothes
  
- Environmental controls: Humidity control (ESD gets worse in a dry environment).
  
- Handling Precautions: During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound. In general, LEDs should only be handled from the side. By the way, this also applies to LEDs Without a silicone sealant, since the surface can also become scratched.
  
- NextGen suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Please do not mold this products into another resin (epoxy, urethane, etc.) and do not handle this Product with acid or sulfur material in sealed space.

The following recommendations are suggested to help minimize the potential for an ESD event.

- One or more recommended work area suggestions:
  - a) Dissipating static charge with conductive materials
  - b) Preventing charge generation with moisture
  - c) ESD safe storage containers ESD
  
- One or more personnel suggestion options:
  - a) Antistatic wrist-strap b) Antistatic material shoes c) Antistatic clothes
  
- Environmental controls: Humidity control (ESD gets worse in a dry environment)

## GLOSSARY

- **Brightness:** Brightness values are measured during a current pulse of typically 20ms, with an internal reproducibility of  $\pm 5\%$ .
- **Wavelength:** The wavelength is measured at a current pulse of typically 20ms, with an internal reproducibility of  $\pm 1.5$  nm.
- **Forward Voltage:** The forward voltage is measured during a current pulse of typically 20ms, with an internal reproducibility of  $\pm 0.05$  V.
- **Reverse Operation:** Continuous reverse operation is not allowed.
- **Thermal Resistance:** RthJA results from mounting on PC board.
- **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.

## IMPORTANT NOTES AND DISCLAIMER

1. **ROHS COMPLIANCE:** The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for this product can be obtained at Download Center.
2. **REACH COMPLIANCE:** REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained at Download Center.
3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
5. *NextGen* makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does *NextGen* assume any liability for application assistance or customer product design.
6. *NextGen* does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
7. *NextGen* products are not authorized for use as critical components in life support devices or systems without express written approval by *NextGen*.
8. *NextGen* requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable.